

CONTENTS




THREAD MILLING TOOLS	3
THREAD TURNING TOOLS	29
SOLIDE CARBIDE END MILLS	50
SOLIDE CARBIDE DRILLS	99
CARBIDE RODS	112



SmiCut has invested in new 6-axis grinding machines from Rollomatic in Switzerland. These will be installed in September 2015.

ThreadBurr

Threading and deburring in one operation!

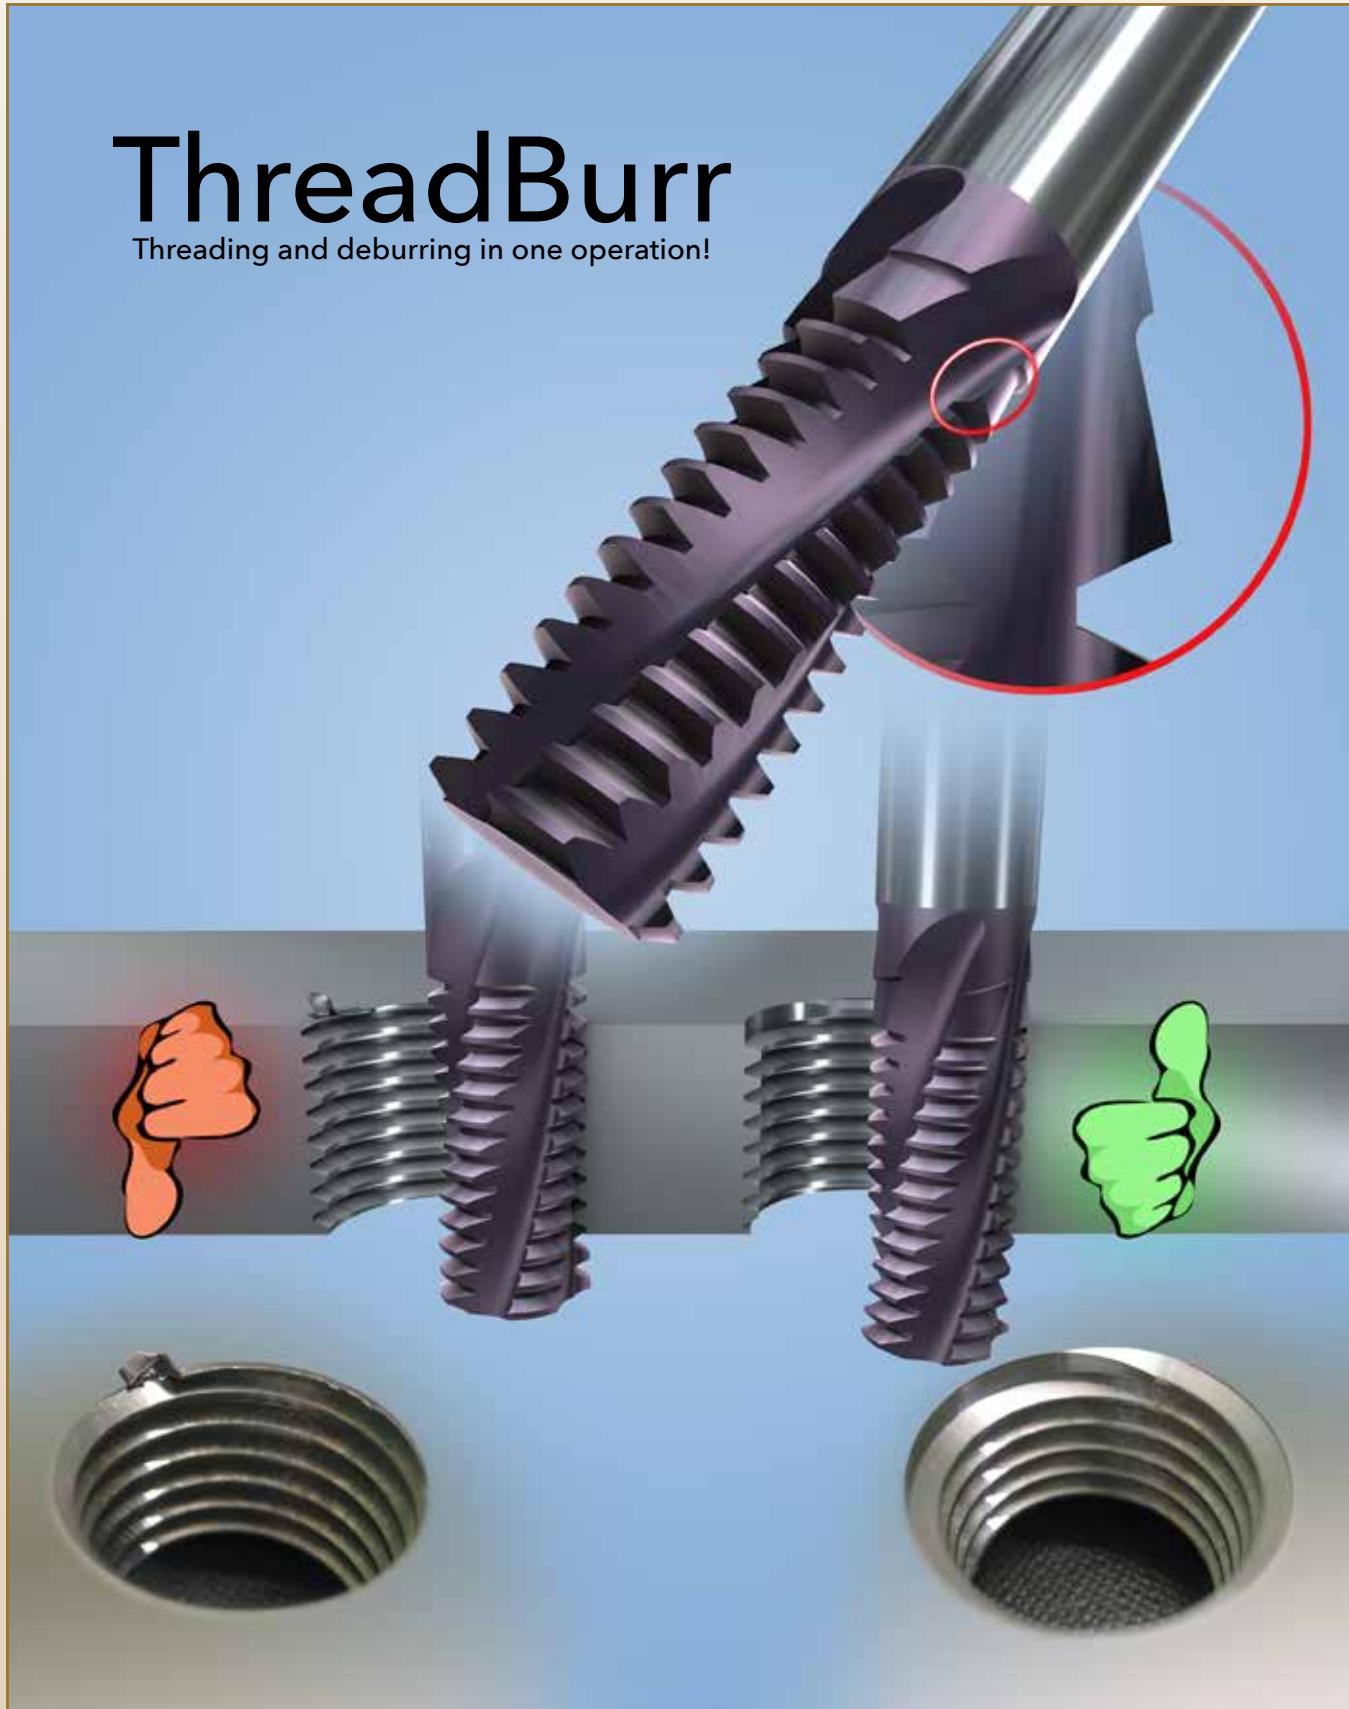


THREAD MILLING

CONTENTS



Technical Information

4

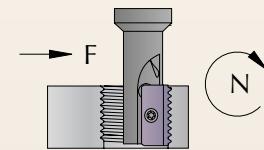

Solid Carbide Thread Mills

10




with Chamfer

15



with Internal Coolant

16



with Internal Radial Coolant

17



Micro, one tooth

18



Micro, two teeth

19



Tapered End Mills for NPT/NPTF/BSPT

14



Thread Milling Cutters

20



Thread Milling Inserts

22




Spiral Fluted Thread Milling Cutters

24



Spiral Fluted Thread Milling Inserts


26



ThreadBurr

The advantage with ThreadBurr is that you can thread and deburr in one operation. No additional time for deburring and countersink is needed. The deburring operation is made automatically when thread milling, which gives you the deburring without any extra costs.

There is no disadvantage to use the ThreadBurr, even if you don't use the deburring function. ThreadBurr is standard on all thread mills from SmiCut.

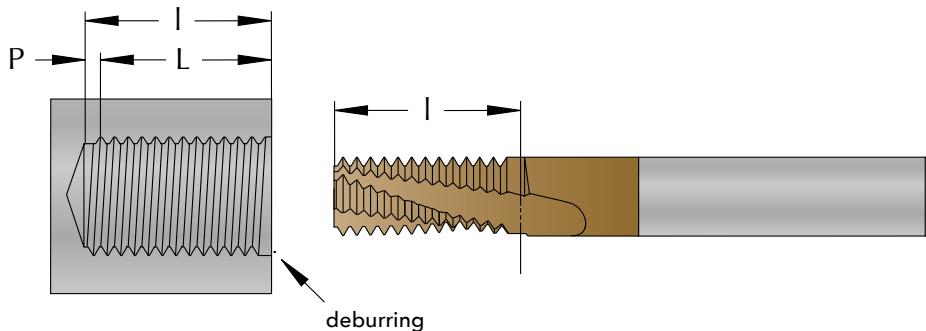


To get a nice entry and a burr free thread you need to start out with going to full depth (l) in to the hole before starting the threading operation. The thread length (L) will be the cutting length (l) minus one pitch (P).

Double ThreadBurr

It is possible to get the thread deburred on both sides. For this operation you need to use a special tool as thread length depends on the thickness of the material. Have in mind the following when you order a tool for deburring on both sides.

- The cutting length (l) should be equivalent to the thickness of the material.

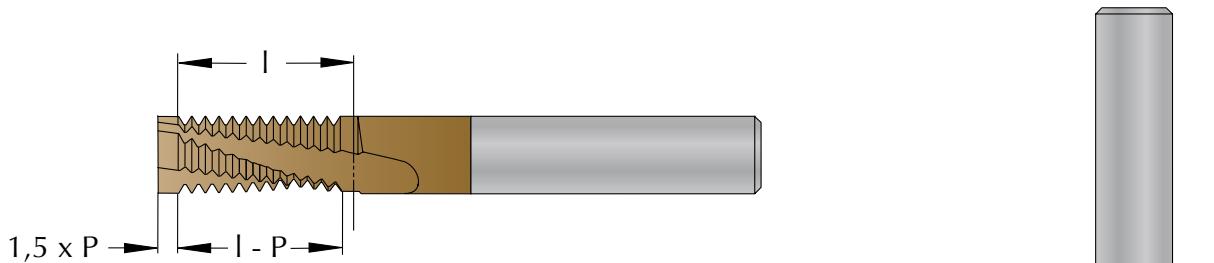

Example


M30x3 thread length 40 mm

$$40 / 3 = 13,3$$


$$13 \times 3 = 39,0 \text{ mm}$$

Number of pitches
Cutting length (l)

Thread Milling with NBB2020D39_3.0ISO_AC ($l = 39,0 \text{ mm}$)

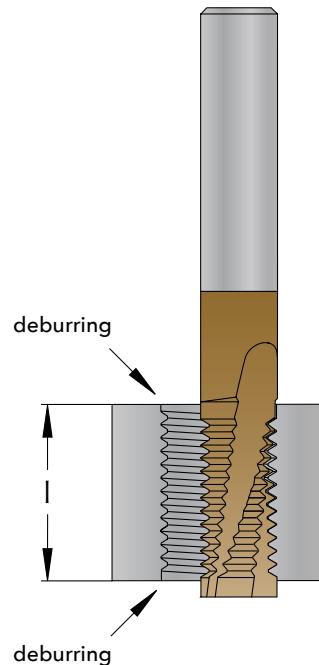

ThreadBurr

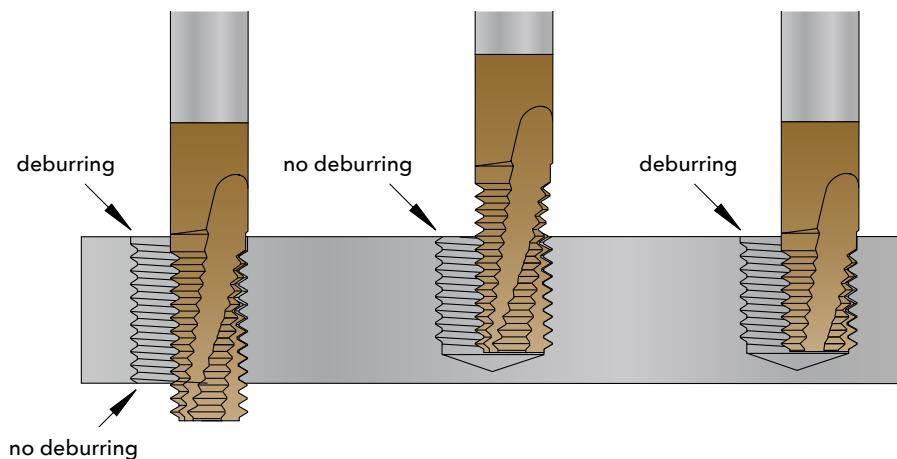


Through holes

You can always use a standard tool for through holes. Please take in mind you should use a tool as short as possible to get best stability and economy.

Blind Holes

With blind holes it is important to have the correct cutting length (l) on the tool to get the thread deburred. Normally you will find a suitable standard tool. If not, we will cut the tool to the correct length with extremely short delivery time and at a reasonable price. Have in mind the following when you order a tool for blind holes.

- The cutting length (l) should be required thread length (L) plus one pitch (P).
- The distance to cut off (c) has to be dividable by the pitch (P).

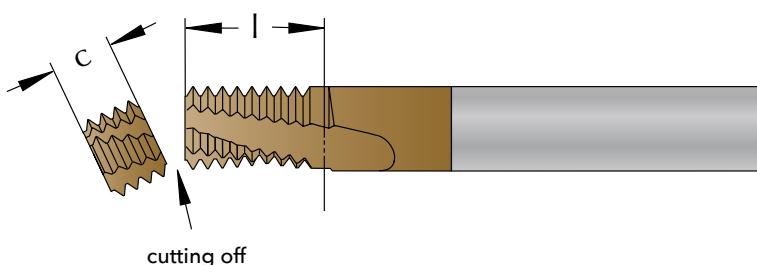

Example

M16x1,5 thread length 24 mm

Thread Milling with NB1212D29_1.5ISO_AC ($L = 29,25$ mm)

$24 + 1,5 = 25,5$ mm	Required cutting length (l)
$29,25 - 25,5 = 3,75$ mm	Maximum cutting off
$3,75 / 1,5 = 2,5$	Number of pitches to cut off
$2 \times 1,5 = 3,0$ mm	Distance to cut off (c)
$29,25 - 3,0 = 26,25$ mm	Cutting length (l) after cutting off
$26,25 - 1,5 = 24,75$ mm	Thread length (L) after cutting off

You only need to cut off the tool when you want to use the deburring function on blind holes and if there is no standard tool with suitable cutting length.

THREAD MILLING

Advantages

■ 1) A secure machining operation

Minimal risk for machining stops as the cutting forces are low and the chips are short. Should there be an accident, the work piece will not be destroyed, as the tool will not be caught since the diameter of the thread mill is less than the thread.

■ 2) Threading in difficult machined materials

The excellent cutting conditions makes it possible to thread mill materials such as hardened steel up to HRC 65, Titanium and other difficult machined materials.

■ 3) Higher quality thread

The cutting conditions are extremely good when you are thread milling. The result of the thread is a higher quality of surface finish, tolerance, angle, etc. compared with other threading methods.

■ 4) Flexible tool

Same cutter can be used for right hand and left hand thread. Threads with different diameters can be made with the same tool as long as the pitch is the same. The same thread mill can be used for blind holes and through holes. W, BSPT, PG, NPT, NPTF and NPSF are thread profiles where you can use the same tool for external and internal thread.

■ 5) Threading in blind holes

When thread milling you will get a complete thread profile to the bottom of the hole. When tapping it's necessary to drill much deeper as it's not until the third thread the tap will make a complete thread profile. Sometimes you are able to change the construction as you don't have to take the deep hole into consideration.

■ 6) Less wear on the machine spindle

Thread milling will give you longer life to the machine spindle compared with tapping as the rotation on the spindle doesn't need to be stopped and reversed for every thread.

■ 7) Energy-saving production

Low energy consumption as the machine spindle doesn't need to be stopped and started after each thread.

■ 8) Thread Milling in a lathe with live tools

Reduced machining time compared with thread turning. Excellent chip control.

■ 9) Threading without burrs

The thread entrance will be burr free when using ThreadBurr. Threading and deburring in one operation. No additional time for deburring.


■ 10) Shorter machining time

The machining time will be short as you don't need to chamfer the thread while using ThreadBurr. Big diameters, fine pitches and long holes saves the most time compared with thread tapping.

■ 11) Correct Thread Diameter right away

The Pitch diameter has been optically measured on thread mills from SmiCut and the theoretical external diameter has been individually laser marked on each cutter so you will get a correct thread straight away. When the tool starts to wear it's possible to make adjustments in the CNC-program.

Deburring of the thread

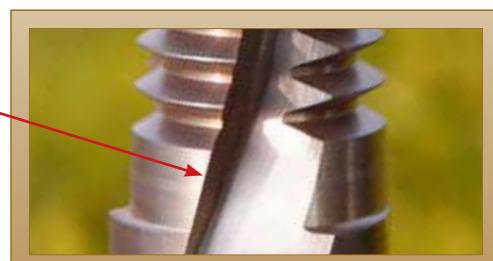

SmiProg makes it easy to Thread Mill

Specify control system, material, thread diameter, pitch and thread length. The program will recommend suitable tools. Choose one and you will receive suggested cutting data, time to mill the thread and CNC programming code. The software is made in excel and is less than 500kb even though it includes 21 different languages. You can download SmiProg free of charge at www.smicut.se

Thread Milling

Internal Thread Milling in Machining Center

Fanuc

M - Metric

Steel, Low Carbon, < 0,25% C, < 400 N/mm²

D = thread diameter (mm)
P = pitch (mm)
L = thread length (mm)
S = safety distance (mm)

24	1
3	2
36	3
2	4

N1616C40 3.0ISO AC

d = cutter diameter (mm)	16	5
l = length of cutting edge (mm)	40,5	6
z = number of flutes	3	7
V = cutting speed (m/min)	158	8
Fz = feed/tooth (mm/tooth)	0,050	9
Number of passes, radial (max 3)	1	10
Number of passes, axial	1	
N = spindle speed (rpm)	3 143	
FD = feed at thread diameter (mm/min)	467	
Fd = feed in center of mill (mm/min)	156	
T = time to mill the thread (seconds)	14	

Please read before use!

CNC program for Fanuc

```


S3143 M3
G00 G91 Z-38.
G01 G41 X2. Y-2, F156
G03 X2. Y2. Z0.375 I0. J2.
G03 X0. Y0. Z3. I-4. J0.
G03 X-2. Y2. Z0.375 I-2. J0.
G01 G40 X-2. Y-2.
G00 Z34.25

```

info@smicut.se
www.smicut.se
Tel +46 240 182 30
Fax +46 240 182 35

SmiCut
STS

copyright © 2008-03-18 English

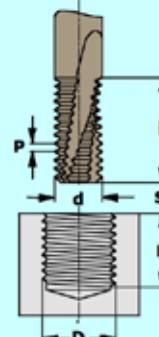

Choose among these languages

Chinese (simp.)
Chinese (trad.)
Danish
Dutch
English
Estonian
Euskera
Finish
French
German
Hungarian
Italian
Japanese
Korean
Norwegian
Polish
Portuguese
Romanian
Russian
Spanish
Swedish

Code Key


NB	10	10	D	23	1.5	ISO	AC
type of tool		cutter diameter		cutting length		thread profile	
	shank dimension		cutting edges		pitch		carbide grade
N = internal threading E = external threading X = in- and external threading B = burring BB = burring on both sides F = chamfering S = micro, one tooth M = micro, two teeth K = internal coolant T = internal radial coolant				C = three flute D = four flute E = five flute F = six flute			

Cutting Speed (V_c) and Material Factor (F_m)

MATERIAL		Hardness HB	Tensile Strength N/mm ²	Cutting Speed (V_c) m/min	Material Factor (F_m)
Steel	Low carbon, C < 0,25%	< 120	< 400	150 - 200	1,2
	Medium carbon, C < 0,55%	< 200	< 700	120 - 170	1,1
	High carbon, C < 0,85%	< 250	< 850	110 - 150	1,0
	Low alloy	< 250	< 850	100 - 140	1,0
	High alloy	< 350	< 1200	70 - 110	0,9
	Hardened, HRC < 45			60 - 100	0,8
	Hardened, HRC < 55			30 - 60	0,7
	Hardened, HRC < 65			20 - 40	0,6
	Lamellar graphite	< 150	< 500	130 - 180	1,2
	Lamellar graphite	< 300	< 1000	100 - 150	1,1
Cast iron	Nodular graphite, malleable	< 200	< 700	100 - 150	1,0
	Nodular graphite, malleable	< 300	< 1000	80 - 120	0,9
	Free machining	< 250	< 850	130 - 180	1,0
	Austenitic	< 250	< 850	90 - 140	0,9
Titanium	Ferritic and austenitic	< 300	< 1000	80 - 120	0,8
	Unalloyed	< 200	< 700	60 - 80	0,8
	Alloyed	< 270	< 900	50 - 70	0,7
Nickel	Alloyed	< 350	< 1250	30 - 50	0,6
	Unalloyed	< 150	< 500	80 - 120	0,8
	Alloyed	< 270	< 900	60 - 80	0,7
Copper	Alloyed	< 350	< 1250	50 - 70	0,6
	Unalloyed	< 100	< 350	150 - 250	1,0
	Brass, bronze	< 200	< 700	130 - 180	1,0
Aluminium	High strength bronze	< 470	< 1500	60 - 80	0,8
	Unalloyed	< 100	< 350	500 - 900	1,4
	Alloyed, Si < 0,5%	< 150	< 500	400 - 800	1,3
	Alloyed, Si < 10%	< 120	< 400	300 - 500	1,2
Inconel	Alloyed, Si > 10%	< 120	< 400	200 - 400	1,1
	718	< 370		50 - 70	0,6
Graphite				300 - 500	1,0

Engagement Factor (F_e)

	B/d = 0,05	B/d = 0,06	B/d = 0,07	B/d = 0,08	B/d = 0,09	B/d = 0,10	B/d = 0,12	B/d = 0,14	B/d = 0,16
L / d = 1,0	1,75	1,59	1,45	1,31	1,20	1,09	0,99	0,90	0,82
L / d = 1,25	1,52	1,38	1,25	1,14	1,04	0,94	0,86	0,78	0,70
L / d = 1,5	1,31	1,20	1,09	0,99	0,90	0,82	0,74	0,67	0,61
L / d = 1,75	1,20	1,09	0,99	0,90	0,82	0,74	0,67	0,61	0,56
L / d = 2,0	1,09	0,99	0,90	0,82	0,74	0,67	0,61	0,56	0,51
L / d = 2,25	0,99	0,90	0,82	0,74	0,67	0,61	0,56	0,51	0,46
L / d = 2,5	0,90	0,82	0,74	0,67	0,61	0,56	0,51	0,46	0,42
L / d = 3,0	0,78	0,70	0,64	0,58	0,53	0,48	0,44	0,40	0,36
L / d = 3,5	0,67	0,61	0,56	0,51	0,46	0,42	0,38	0,35	0,31
L / d = 4,0	0,61	0,56	0,51	0,46	0,42	0,38	0,35	0,31	0,29

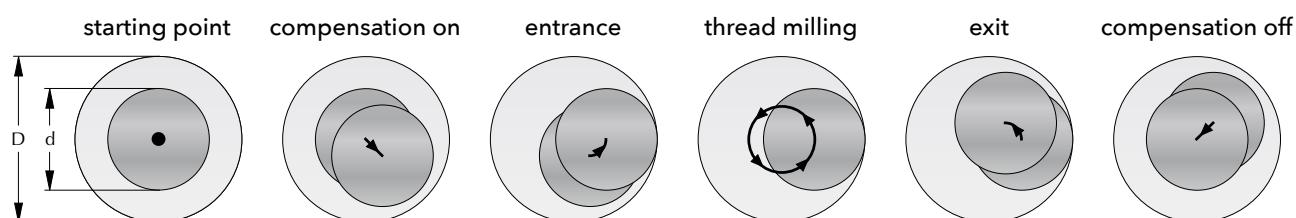

Diameter Factor (F_d)

D	Diameter Factor (F_d)
1,5	0,010
2,0	0,011
3,0	0,015
4,0	0,019
5,0	0,024
6,0	0,028
8,0	0,036
10,0	0,044
12,0	0,052
14,0	0,060
16,0	0,067
18,0	0,075
20,0	0,082
25,0	0,101
32,0	0,126
40,0	0,156

Example

M24x3,0 thread length 36 mm
 Carbon Steel, up to 400 N/mm²
 Thread Milling with NB1616C40_3.0ISO_AC
 $B = 0,54 \times 3 = 1,62 \text{ mm}$
 $B/d = 1,62/16 = 0,10$
 $L/d = 36/16 = 2,25$
 $F_z = 1,2 \times 0,61 \times 0,067 = 0,049$
 $n = (160 \times 1000) / (\pi \times 16) = 3183 \text{ rpm}$
 $V_{fD} = 0,049 \times 3 \times 3183 = 468 \text{ mm/min}$
 $V_{fd} = 468 \times (24-16) / 24 = 156 \text{ mm/min}$
 $T = (278 \times 24) / 468 = 14 \text{ seconds}$

$$B = 0,54 \times P$$

$$F_z = F_m \times F_e \times F_d$$

$$n = \frac{V_c \times 1000}{\pi \times d}$$

$$V_{fD} = F_z \times z \times n$$

$$V_{fd} = V_{fD} \times \frac{(D - d)}{D}$$

$$T = 278 \times \frac{D}{V_{fD}}$$

D = thread diameter (mm)

L = thread length (mm)

d = cutter diameter (mm)

B = depth of profile (mm)

P = pitch (mm)

z = cutting edges

F_z = feed / flute (mm/flute)


n = spindle speed (rpm)

V_c = cutting speed (m/min)

V_{fD} = feed at thread diameter (mm/min)

V_{fd} = feed at center of mill (mm/min)

T = time to mill the thread (seconds)

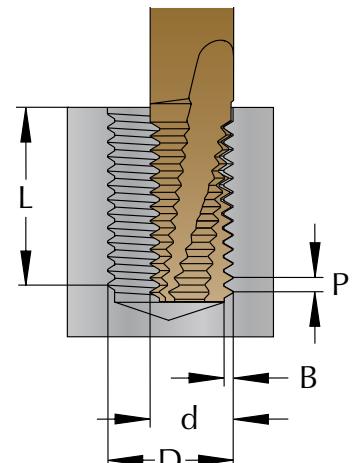
AC

Micrograin Carbide with TiAlCN coating.
 Allround Grade with low friction.
 Use cutting data according to the tables.

FC

Micrograin Carbide with TiAlN coating.
 Allround Grade with high heat resistance.
 Use cutting data according to the tables.

ThreadBurr


AC
TiAlCN coated
Micrograin Carbide

Tolerance
The theoretical external diameter of the cutter is lasermarked on the tool.

Shank
Cylindrical h6, DIN6535 HA

Flute
15° right hand spiral

Field of application
Thread Milling of all types of steel

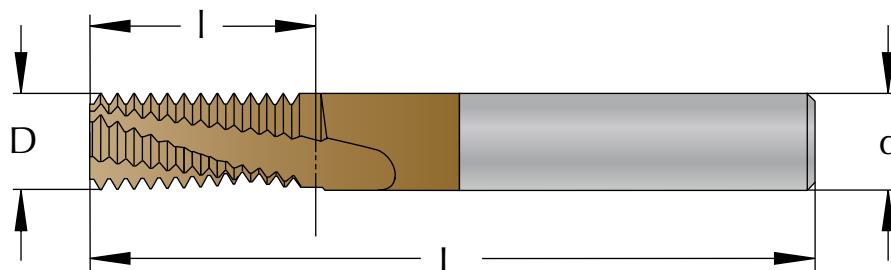

M

METRIC

Pitch mm	M coarse	M fine	INTERNAL Part Number	d mm	D mm	Cutting edges	I mm	L mm
0,4	M2 (1,5xD)		NB04015C3_0.4ISO_AC	4	1,5	3	3,4	50
0,4	M2 (2xD)		NB04015C4_0.4ISO_AC	4	1,5	3	4,6	50
0,45	M2,2 (1,5xD)		NB04016C3_0.45ISO_AC	4	1,6	3	3,82	50
0,45	M2,2 (2xD)		NB04016C5_0.45ISO_AC	4	1,6	3	5,17	50
0,45	M2,5 (1,5xD)		NB04019C4_0.45ISO_AC	4	1,9	3	4,27	50
0,45	M2,5 (2xD)		NB04019C5_0.45ISO_AC	4	1,9	3	5,62	50
0,5	M3 (1,5xD)	$\geq M4$	NB04023C5_0.5ISO_AC	4	2,3	3	5,25	50
0,5	M3 (2xD)	$\geq M4$	NB04023C6_0.5ISO_AC	4	2,3	3	6,75	50
0,5	M3 (2,5xD)	$\geq M4$	NB04023C8_0.5ISO_AC	4	2,3	3	8,25	50
0,5	M3 (1,5xD)	$\geq M4$	NB06023C5_0.5ISO_AC	6	2,3	3	5,25	63
0,5	M3 (2xD)	$\geq M4$	NB06023C6_0.5ISO_AC	6	2,3	3	6,75	63
0,5	M3 (2,5xD)	$\geq M4$	NB06023C8_0.5ISO_AC	6	2,3	3	8,25	63
0,5		$\geq M5$	NB04038C10_0.5ISO_AC	4	3,8	3	10,75	50
0,5		$\geq M5$	NB06038C10_0.5ISO_AC	6	3,8	3	10,75	63
0,6	M3,5 (1,5xD)		NB04026C6_0.6ISO_AC	4	2,6	3	6,3	50
0,6	M3,5 (2xD)		NB04026C8_0.6ISO_AC	4	2,6	3	8,1	50
0,7	M4 (1,5xD)		NB0403C7_0.7ISO_AC	4	3	3	7,35	50
0,7	M4 (2xD)		NB0403C8_0.7ISO_AC	4	3	3	8,75	50
0,7	M4 (2,5xD)		NB0403C10_0.7ISO_AC	4	3	3	10,85	50
0,7	M4 (1,5xD)		NB0603C7_0.7ISO_AC	6	3	3	7,35	63
0,7	M4 (2xD)		NB0603C8_0.7ISO_AC	6	3	3	8,75	63
0,7	M4 (2,5xD)		NB0603C10_0.7ISO_AC	6	3	3	10,85	63
0,75	M4,5 (1,5xD)		NB04034C7_0.75ISO_AC	4	3,4	3	7,87	50
0,75	M4,5 (2xD)		NB04034C10_0.75ISO_AC	4	3,4	3	10,12	50
0,75		$\geq M6$	NB06045C10_0.75ISO_AC	6	4,5	3	10,87	63
0,75		$\geq M6$	NB06045C16_0.75ISO_AC	6	4,5	3	16,87	63
0,8	M5 (1,5xD)		NB04038C8_0.8ISO_AC	4	3,8	3	8,4	50
0,8	M5 (2xD)		NB04038C10_0.8ISO_AC	4	3,8	3	10,8	50
0,8	M5 (2,5xD)		NB04038C13_0.8ISO_AC	4	3,8	3	13,2	50
0,8	M5 (1,5xD)		NB06038C8_0.8ISO_AC	6	3,8	3	8,4	63
0,8	M5 (2xD)		NB06038C10_0.8ISO_AC	6	3,8	3	10,8	63
0,8	M5 (2,5xD)		NB06038C13_0.8ISO_AC	6	3,8	3	13,2	63
1,0	M6 (1,5xD)	$\geq M8$	NB06045C10_1.0ISO_AC	6	4,5	3	10,5	63
1,0	M6 (2xD)	$\geq M8$	NB06045C13_1.0ISO_AC	6	4,5	3	13,5	63
1,0	M6 (2,5xD)	$\geq M8$	NB06045C16_1.0ISO_AC	6	4,5	3	16,5	63
1,0	M6 (3xD)	$\geq M8$	NB06045C19_1.0ISO_AC	6	4,5	3	19,5	63
1,0		$\geq M8$	NB0606C10_1.0ISO_AC	6	6	3	10,5	63
1,0		$\geq M8$	NB0606C13_1.0ISO_AC	6	6	3	13,5	63
1,0		$\geq M10$	NB0808D10_1.0ISO_AC	8	8	4	10,5	63
1,0		$\geq M10$	NB0808D13_1.0ISO_AC	8	8	4	13,5	63
1,0		$\geq M10$	NB0808D17_1.0ISO_AC	8	8	4	17,5	63
1,0		$\geq M12$	NB1010E14_1.0ISO_AC	10	10	5	14,5	76
1,0		$\geq M12$	NB1010E19_1.0ISO_AC	10	10	5	19,5	76
1,0		$\geq M14$	NB1212F15_1.0ISO_AC	12	12	6	15,5	83
1,0		$\geq M14$	NB1212F21_1.0ISO_AC	12	12	6	21,5	83
1,25	M8 (1,5xD)	$\geq M10$	NB0606C14_1.25ISO_AC	6	6	3	14,37	63

continue

M**METRIC**

Pitch mm	M coarse	M fine	INTERNAL Part Number	d mm	D mm	Cutting edges	I mm	L mm
1,25	M8 (2xD)	≥ M10	NB0606C18_1.25ISO_AC	6	6	3	18,12	63
1,25	M8 (2,5xD)	≥ M10	NB0606C21_1.25ISO_AC	6	6	3	21,87	63
1,25	M8 (3xD)	≥ M10	NB0606C25_1.25ISO_AC	6	6	3	25,62	76
1,5	M10 (1,5xD)	≥ M12	NB08075C17_1.5ISO_AC	8	7,5	3	17,25	63
1,5	M10 (2xD)	≥ M12	NB08075C21_1.5ISO_AC	8	7,5	3	21,75	76
1,5	M10 (2,5xD)	≥ M12	NB08075C27_1.5ISO_AC	8	7,5	3	27,75	76
1,5	M10 (3xD)	≥ M12	NB08075C32_1.5ISO_AC	8	7,5	3	32,25	76
1,5		≥ M14	NB1010D17_1.5ISO_AC	10	10	4	17,25	76
1,5		≥ M14	NB1010D23_1.5ISO_AC	10	10	4	23,25	76
1,5		≥ M16	NB1212D15_1.5ISO_AC	12	12	4	15,75	83
1,5		≥ M16	NB1212D21_1.5ISO_AC	12	12	4	21,75	83
1,5		≥ M16	NB1212D29_1.5ISO_AC	12	12	4	29,25	83
1,5		≥ M20	NB1616F18_1.5ISO_AC	16	16	6	18,75	89
1,5		≥ M20	NB1616F26_1.5ISO_AC	16	16	6	26,25	89
1,5		≥ M20	NB1616F35_1.5ISO_AC	16	16	6	35,25	100
1,75	M12 (1,5xD)		NB0808C20_1.75ISO_AC	8	8	3	20,12	76
1,75	M12 (2xD)		NB0808C27_1.75ISO_AC	8	8	3	27,12	76
1,75	M12 (1,5xD)		NB1009C20_1.75ISO_AC	10	9	3	20,12	76
1,75	M12 (2xD)		NB1009C27_1.75ISO_AC	10	9	3	27,12	76
1,75	M12 (2,5xD)		NB1009C32_1.75ISO_AC	10	9	3	32,37	100
1,75	M12 (3xD)		NB1009C37_1.75ISO_AC	10	9	3	37,62	100
2,0	M14 (1,5xD)	≥ M18	NB1010C23_2.0ISO_AC	10	10	3	23	76
2,0	M14 (2xD)	≥ M18	NB1010C31_2.0ISO_AC	10	10	3	31	100
2,0	M14 (2,5xD)	≥ M18	NB1010C37_2.0ISO_AC	10	10	3	37	100
2,0	M16 (1,5xD)	≥ M18	NB1212D27_2.0ISO_AC	12	12	4	27	83
2,0	M16 (2xD)	≥ M18	NB1212D35_2.0ISO_AC	12	12	4	35	100
2,0	M16 (2,5xD)	≥ M18	NB1212D43_2.0ISO_AC	12	12	4	43	100
2,0	M16 (3xD)	≥ M18	NB1212C51_2.0ISO_AC	12	12	3	51	100
2,0		≥ M20	NB1616E29_2.0ISO_AC	12	12	5	29	89
2,0		≥ M20	NB1616E39_2.0ISO_AC	16	16	5	39	100
2,0		≥ M24	NB2020F43_2.0ISO_AC	20	20	6	43	100
2,0		≥ M30	NB2525F57_2.0ISO_AC	25	25	6	57	130
2,5	M18 (1,5xD)		NB1212C31_2.5ISO_AC	12	12	3	31,25	100
2,5	M18 (2xD)		NB1212C38_2.5ISO_AC	12	12	3	38,75	100
2,5	M18 (2,5xD)		NB1212C48_2.5ISO_AC	12	12	3	48,75	100
2,5	M20 (1,5xD)		NB1414D33_2.5ISO_AC	14	14	4	33,75	89
2,5	M20 (2xD)		NB1414D43_2.5ISO_AC	14	14	4	43,75	100
2,5	M20 (2,5xD)		NB1615D53_2.5ISO_AC	16	15	4	53,75	120
2,5	M20 (3xD)		NB1615C63_2.5ISO_AC	16	15	3	63,75	120
3,0	M24 (1,5xD)	≥ M30	NB1616C40_3.0ISO_AC	16	16	3	40,5	100
3,0	M24 (2xD)	≥ M30	NB1616C52_3.0ISO_AC	16	16	3	52,5	120
3,0	M24 (2,5xD)	≥ M30	NB1818C64_3.0ISO_AC	18	18	3	64,5	130
3,0		≥ M30	NB2020D46_3.0ISO_AC	20	20	4	46,5	120
3,0		≥ M33	NB2525D61_3.0ISO_AC	25	25	4	61,5	130
3,5	M30 (1,5xD)		NB2020C50_3.5ISO_AC	20	20	3	50,75	120
3,5	M30 (2xD)		NB2020C64_3.5ISO_AC	20	20	3	64,75	150
3,5	M30 (2,5xD)		NB2020C78_3.5ISO_AC	20	20	3	78,75	150
4,0	M36 (1,5xD)	≥ M42	NB2525C58_4.0ISO_AC	25	25	3	58	130
4,0	M36 (2xD)	≥ M42	NB2525C78_4.0ISO_AC	25	25	3	78	150

M**METRIC (external)**

Pitch mm	EXTERNAL Part Number	d mm	D mm	Cutting edges	I mm	L mm
1,0	EB1010D21_1.0ISO_AC	10	10	4	21,5	76
1,5	EB1212D26_1.5ISO_AC	12	12	4	26,25	83
2,0	EB1616D35_2.0ISO_AC	16	16	4	35	100

■ SmiCut produce Solid Carbide Thread Mills with pitches up to 6,0 mm (4TPI).

UN

UNIFIED

Pitch TPI	UNC	UNF	INTERNAL Part Number	d mm	D mm	Cutting edges	I mm	L mm
44		No.5 (1,5xD)	NB04024C5_44UN_AC	4	2,4	3	5,48	50
40	No.5 (1,5xD)		NB04023C5_40UN_AC	4	2,3	3	5,4	50
40	No.5 (2xD)		NB04023C7_40UN_AC	4	2,3	3	7,3	50
40	No.5 (2,5xD)		NB04023C8_40UN_AC	4	2,3	3	8,57	50
40		No.6 (1,5xD)	NB04026C6_40UN_AC	4	2,6	3	6,03	50
36		No.8 (1,5xD)	NB04031C7_36UN_AC	4	3,1	3	7,41	50
36		No.8 (2xD)	NB04031C9_36UN_AC	4	3,1	3	9,53	50
32	No.6 (1,5xD)		NB04025C6_32UN_AC	4	2,5	3	6,75	50
32	No.6 (2xD)		NB04025C8_32UN_AC	4	2,5	3	8,33	50
32	No.6 (2,5xD)		NB04025C10_32UN_AC	4	2,5	3	9,92	50
32	No.8 (1,5xD)		NB0403C7_32UN_AC	4	3	3	7,54	50
32	No.8 (2xD)		NB0403C9_32UN_AC	4	3	3	9,13	50
32	No.8 (2,5xD)		NB0403C11_32UN_AC	4	3	3	11,51	50
32		No.10 (1,5xD)	NB04036C8_32UN_AC	4	3,6	3	8,33	50
32		No.10 (2xD)	NB04036C10_32UN_AC	4	3,6	3	10,72	50
32			NB0606D13_32UN_AC	6	6	4	13,1	63
28		No.12 (1,5xD)	NB0404C9_28UN_AC	4	4	3	9,52	50
28		No.12 (2xD)	NB0404C12_28UN_AC	4	4	3	12,25	50
28		1/4 (1,5xD)	NB0605C10_28UN_AC	6	5	3	10,43	63
28		1/4 (2xD)	NB0605C14_28UN_AC	6	5	3	14,06	63
28			NB0808D17_28UN_AC	8	8	4	17,69	63
24	No.10 (1,5xD)		NB04038C9_24UN_AC	4	3,8	3	9	50
24	No.10 (2xD)		NB04038C11_24UN_AC	4	3,8	3	11,11	50
24	No.10 (2,5xD)		NB04038C13_24UN_AC	4	3,8	3	13,23	50
24	No.12 (1,5xD)		NB0404C10_24UN_AC	4	4	3	10,05	50
24	No.12 (2xD)		NB0404C12_24UN_AC	4	4	3	12,17	50
24	No.12 (2,5xD)		NB0404C15_24UN_AC	4	4	3	15,35	50
24		5/16 (1,5xD)	NB0606C13_24UN_AC	6	6	3	13,23	63
24		5/16 (2xD)	NB0606C17_24UN_AC	6	6	3	17,46	63
24		3/8 (1,5xD)	NB08076C15_24UN_AC	8	7,6	3	15,35	63
24		3/8 (2xD)	NB08076C20_24UN_AC	8	7,6	3	20,64	76
20	1/4 (1,5xD)		NB06045C10_20UN_AC	6	4,5	3	10,8	63
20	1/4 (2xD)		NB06045C14_20UN_AC	6	4,5	3	14,6	63
20	1/4 (2,5xD)		NB06045C17_20UN_AC	6	4,5	3	17,15	63
20		7/16 (1,5xD)	NB0808C18_20UN_AC	8	8	3	18,41	63
20		7/16 (2xD)	NB0808C23_20UN_AC	8	8	3	23,5	76
20		1/2 (1,5xD)	NB1010D21_20UN_AC	10	10	4	20,96	76
20		1/2 (2xD)	NB1010D27_20UN_AC	10	10	4	27,31	76
20			NB1212E28_20UN_AC	12	12	5	28,57	83
18	5/16 (1,5xD)		NB06058C13_18UN_AC	6	5,8	3	13,41	63
18	5/16 (2xD)		NB06058C17_18UN_AC	6	5,8	3	17,64	63
18	5/16 (2,5xD)		NB06058C21_18UN_AC	6	5,8	3	21,87	63
18		9/16 (1,5xD)	NB1010D23_18UN_AC	10	10	4	23,28	76
18		9/16 (2xD)	NB1010D30_18UN_AC	10	10	4	30,34	100
18		5/8 (1,5xD)	NB1212D26_18UN_AC	12	12	4	26,11	83
18		5/8 (2xD)	NB1212D33_18UN_AC	12	12	4	33,16	100
16	3/8 (1,5xD)		NB0606C16_16UN_AC	6	6	3	16,67	63
16	3/8 (2xD)		NB0606C21_16UN_AC	6	6	3	21,43	63
16	3/8 (2,5xD)		NB0807C26_16UN_AC	8	7	3	26,19	76
16		3/4 (1,5xD)	NB1212D31_16UN_AC	12	12	4	30,96	100
16		3/4 (2xD)	NB1212D40_16UN_AC	12	12	4	40,48	100
16			NB1616E35_16UN_AC	16	16	5	35,72	100
14	7/16 (1,5xD)		NB0808C19_14UN_AC	8	8	3	19,05	63
14	7/16 (2xD)		NB0808C24_14UN_AC	8	8	3	24,49	76
14	7/16 (2,5xD)		NB0808C30_14UN_AC	8	8	3	29,94	76
14		7/8 (1,5xD)	NB1616E35_14UN_AC	16	16	5	35,38	100
14		7/8 (2xD)	NB1616E46_14UN_AC	16	16	5	46,26	120
13	1/2 (1,5xD)		NB0808C22_13UN_AC	8	8	3	22,47	76
13	1/2 (2xD)		NB0808C28_13UN_AC	8	8	3	28,33	76
13	1/2 (2,5xD)		NB10093C34_13UN_AC	10	9,3	3	34,19	100

continue

UN**UNIFIED**

Pitch TPI	UNC	UNF	INTERNAL Part Number	d mm	D mm	Cutting edges	I mm	L mm
12	9/16 (1,5xD)		NB1010C24_12UN_AC	10	10	3	24,34	76
12	9/16 (2xD)		NB1010C30_12UN_AC	10	10	3	30,69	100
12			NB1616E43_12UN_AC	16	16	5	43,39	100
11	5/8 (1,5xD)		NB1010C26_11UN_AC	10	10	3	26,55	76
11	5/8 (2xD)		NB1010C35_11UN_AC	10	10	3	35,79	100
11	5/8 (2,5xD)		NB12117C42_11UN_AC	12	11,7	3	42,72	100
10	3/4 (1,5xD)		NB1212C31_10UN_AC	12	12	3	31,75	100
10	3/4 (2xD)		NB1212C41_10UN_AC	12	12	3	41,91	100
9	7/8 (1,5xD)		NB1616C38_9UN_AC	16	16	3	38,1	100
9	7/8 (2xD)		NB1616C49_9UN_AC	16	16	3	49,39	120
8	1 (1,5xD)		NB1616C42_8UN_AC	16	16	3	42,86	100
8	1 (2xD)		NB1616C55_8UN_AC	16	16	3	55,56	120
8			NB2020D49_8UN_AC	20	20	4	49,21	120
7	11/8 - 1 1/4 (1,5xD)		NB2020C52_7UN_AC	20	20	3	52,61	120
6	1 3/8 - 1 1/2 (1,5xD)		NB2525C61_6UN_AC	25	25	3	61,38	130

G**WHITWORTH PIPE THREAD**

Pitch TPI	Standard	INTERNAL / EXTERNAL Part Number	d mm	D mm	Cutting edges	I mm	L mm
28	G 1/16 - 1/8	XB0606C10_28W_AC	6	6	3	10,43	63
19	G 1/4 - 3/8	XB0808C15_19W_AC	8	8	3	15,37	63
19	G 1/4 - 3/8	XB1010D22_19W_AC	10	10	4	22,06	76
14	G 1/2 - 7/8	XB1212D20_14W_AC	12	12	4	20,86	83
14	G 1/2 - 7/8	XB1212D28_14W_AC	12	12	4	28,12	83
14	G 1/2 - 7/8	XB1616E28_14W_AC	16	16	5	28,12	89
11	G 1 - 1 1/2	XB1212C26_11W_AC	12	12	3	26,55	83
11	G 1 - 3	XB1616D40_11W_AC	16	16	4	40,41	100
11	G ≥ 1	XB2020E49_11W_AC	20	20	5	49,65	120

BSPT**BSPT PIPE THREAD**

Pitch TPI	Standard	INTERNAL / EXTERNAL Part Number	d mm	D mm	Cutting edges	I mm	L mm
28	Rc 1/16 - 1/8	XB0606C10_28BSPT_AC	6	6	3	10,43	63
19	Rc 1/4 - 3/8	XB0808C15_19BSPT_AC	8	8	3	15,37	63
14	Rc 1/2 - 7/8	XB1212D20_14BSPT_AC	12	12	4	20,86	83
11	Rc 1 - 2	XB1616D31_11BSPT_AC	16	16	4	31,17	89

PG**STEEL CONDUIT THREAD DIN 40430**

Pitch TPI	Standard	INTERNAL / EXTERNAL Part Number	d mm	D mm	Cutting edges	I mm	L mm
20	Pg 7	XB0808C21_20PG_AC	8	8	3	20,96	63
18	Pg 9 - 16	XB1010C27_18PG_AC	10	10	3	27,52	76
16	Pg 21 - 48	XB1212D31_16PG_AC	12	12	4	30,96	83

NPSF**NPSF PIPE THREAD**

Pitch TPI	Standard	INTERNAL / EXTERNAL Part Number	d mm	D mm	Cutting edges	I mm	L mm
27	1/16 - 1/8	XB0606C12_27NPSF_AC	6	6	3	12,70	63
18	1/4 - 3/8	XB0808C16_18NPSF_AC	8	8	3	16,23	63
14	1/2 - 3/4	XB1212D22_14NPSF_AC	12	12	4	22,68	83
11,5	1	XB1616D29_11.5NPSF_AC	16	16	4	29,82	89

■ SmiCut produce Solid Carbide Thread Mills with pitches up to 6,0 mm (4TPI).

NPT

NPT PIPE THREAD


Pitch TPI	Standard	INTERNAL / EXTERNAL Part Number	d mm	D mm	Cutting edges	I mm	L mm
27	1/16 - 1/8	XB0606C10_27NPT_AC	6	6	3	10,82	63
18	1/4 - 3/8	XB0808C16_18NPT_AC	8	8	3	16,23	63
14	1/2 - 3/4	XB1212D22_14NPT_AC	12	12	4	22,68	83
14	3/4	XB1616D22_14NPT_AC	16	16	4	22,68	89
11,5	1 - 2	XB1616D29_11.5NPT_AC	16	16	4	29,82	89
8	≥ 2 1/2	XB2020D42_8NPT_AC	20	20	4	42,86	100

NPTF

NPTF DRYSEAL PIPE THREAD

Pitch TPI	Standard	INTERNAL / EXTERNAL Part Number	d mm	D mm	Cutting edges	I mm	L mm
27	1/16 - 1/8	XB0606C10_27NPTF_AC	6	6	3	10,82	63
18	1/4 - 3/8	XB0808C16_18NPTF_AC	8	8	3	16,23	63
14	1/2 - 3/4	XB1212D22_14NPTF_AC	12	12	4	22,68	83
11,5	1 - 2	XB1616D29_11.5NPTF_AC	16	16	4	29,82	89
8	≥ 2 1/2	XB2020D42_8NPTF_AC	20	20	4	42,86	100

Tapered End Mills for NPT/NPTF/BSPT

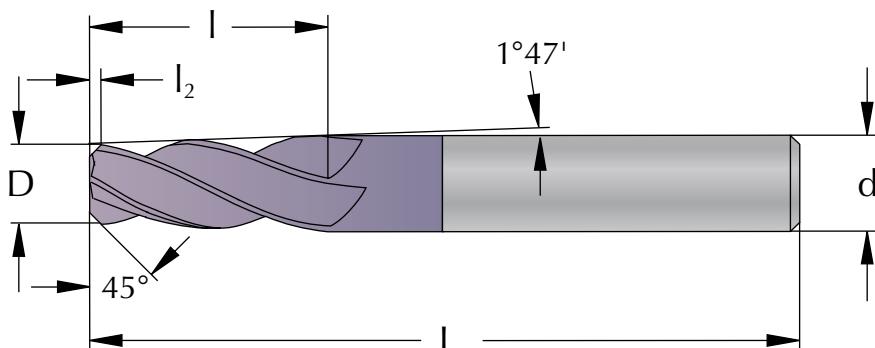

D mm	d mm	Part Number	Cutting edges	I mm	I ₂ mm	L mm
5	6	NPT0605D16_FC	4	16	1,0	63
8,5	10	NPT10085D24_FC	4	24	1,5	76
14	16	NPT1614D32_FC	4	32	2	89
17	20	NPT2017D48_FC	4	48	3	120

Chamfering of the thread



Premilling of conical holes result in longer tool life of thread mill

ACTiAlCN coated
Micrograin Carbide**Tolerance**The theoretical external diameter of
the cutter is lasermarked on the tool.**Shank**


Cylindrical h6, DIN6535 HA

Flute


15° right hand spiral

Field of application

Thread Milling of all types of steel

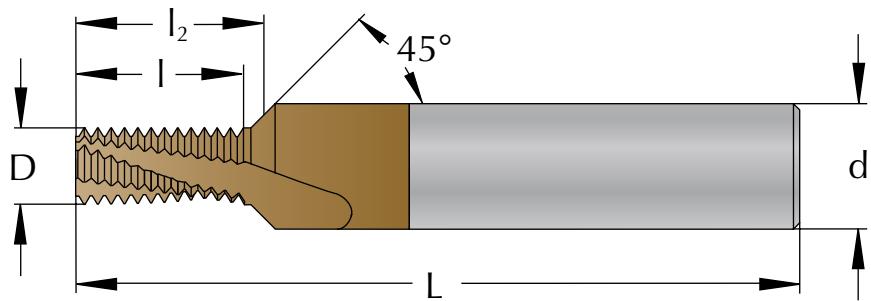**M****METRIC**

Pitch mm	M coarse	INTERNAL Part Number	d mm	D mm	Cutting edges	l mm	l ₂ mm	L mm
0,5	M3 (1,5xD)	NF06023C5_0,5ISO_AC	6	2,3	3	5,25	5,85	63
0,5	M3 (2xD)	NF06023C6_0,5ISO_AC	6	2,3	3	6,75	7,35	63
0,5	M3 (2,5xD)	NF06023C8_0,5ISO_AC	6	2,3	3	8,25	8,85	63
0,5	M3 (3xD)	NF06023C9_0,5ISO_AC	6	2,3	3	9,75	10,35	63
0,7	M4 (1,5xD)	NF0603C7_0,7ISO_AC	6	3	3	7,35	8,2	63
0,7	M4 (2xD)	NF0603C8_0,7ISO_AC	6	3	3	8,75	9,6	63
0,7	M4 (2,5xD)	NF0603C10_0,7ISO_AC	6	3	3	10,85	11,7	63
0,7	M4 (3xD)	NF0603C12_0,7ISO_AC	6	3	3	12,95	13,8	63
0,8	M5 (1,5xD)	NF06038C8_0,8ISO_AC	6	3,8	3	8,4	9,4	63
0,8	M5 (2xD)	NF06038C10_0,8ISO_AC	6	3,8	3	10,8	11,8	63
0,8	M5 (2,5xD)	NF06038C13_0,8ISO_AC	6	3,8	3	13,2	14,2	63
0,8	M5 (3xD)	NF06038C16_0,8ISO_AC	6	3,8	3	16,4	17,4	63
1,0	M6 (1,5xD)	NF08045C10_1,0ISO_AC	8	4,5	3	10,5	11,75	63
1,0	M6 (2xD)	NF08045C13_1,0ISO_AC	8	4,5	3	13,5	14,75	63
1,0	M6 (2,5xD)	NF08045C16_1,0ISO_AC	8	4,5	3	16,5	17,75	63
1,25	M8 (1,5xD)	NF1006C14_1,25ISO_AC	10	6	3	14,37	16	76
1,25	M8 (2xD)	NF1006C18_1,25ISO_AC	10	6	3	18,12	19,75	76
1,25	M8 (2,5xD)	NF1006C21_1,25ISO_AC	10	6	3	21,87	23,5	76
1,5	M10 (1,5xD)	NF12075C17_1,5ISO_AC	12	7,5	3	17,25	19,25	83
1,5	M10 (2xD)	NF12075C21_1,5ISO_AC	12	7,5	3	21,75	23,75	83
1,5	M10 (2,5xD)	NF12075C27_1,5ISO_AC	12	7,5	3	27,75	29,75	83
1,75	M12 (1,5xD)	NF1409C20_1,75ISO_AC	14	9	3	20,12	22,5	89
1,75	M12 (2xD)	NF1409C27_1,75ISO_AC	14	9	3	27,12	29,5	89
1,75	M12 (2,5xD)	NF1409C32_1,75ISO_AC	14	9	3	32,37	34,75	89

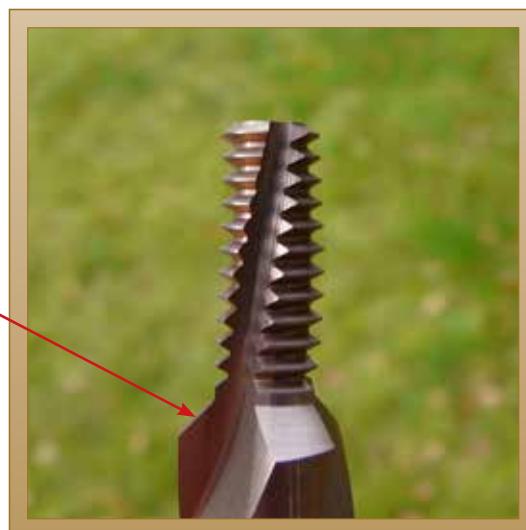

ThreadBurr with Internal Coolant

AC

 TiAlCN coated
 Micrograin Carbide

Tolerance

The theoretical external diameter of the cutter is lasermarked on the tool.

Shank


Cylindrical h6, DIN6535 HA

Flute

15° right hand spiral

Field of application

Thread Milling of all types of steel

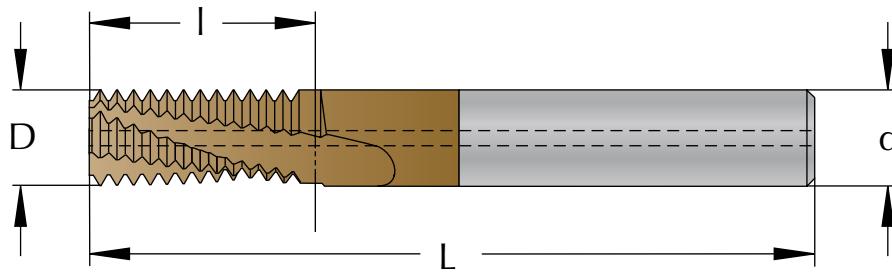
M
METRIC

Pitch mm	M coarse	M fine	INTERNAL Part Number	d mm	D mm	Cutting edges	I mm	L mm
0,8	M5 (1,5xD)		NBK04038C8_0.8ISO_AC	4	3,8	3	8,4	50
0,8	M5 (2xD)		NBK04038C10_0.8ISO_AC	4	3,8	3	10,8	50
0,8	M5 (2,5xD)		NBK04038C13_0.8ISO_AC	4	3,8	3	13,2	50
1,0	M6 (1,5xD)		NBK06045C10_1.0ISO_AC	6	4,5	3	10,5	63
1,0	M6 (2xD)		NBK06045C13_1.0ISO_AC	6	4,5	3	13,5	63
1,0	M6 (2,5xD)		NBK06045C16_1.0ISO_AC	6	4,5	3	16,5	63
1,0	≥ M10		NBK0808D17_1.0ISO_AC	8	8	3	17,5	76
1,25	M8 (1,5xD)	≥ M10	NBK0606C14_1.25ISO_AC	6	6	3	14,37	63
1,25	M8 (2xD)	≥ M10	NBK0606C18_1.25ISO_AC	6	6	3	18,12	63
1,25	M8 (2,5xD)	≥ M10	NBK0606C21_1.25ISO_AC	6	6	3	21,87	63
1,5	M10 (1,5xD)	≥ M12	NBK08075C17_1.5ISO_AC	8	7,5	3	17,25	76
1,5	M10 (2xD)	≥ M12	NBK08075C21_1.5ISO_AC	8	7,5	3	21,75	76
1,5	M10 (2,5xD)	≥ M12	NBK08075C27_1.5ISO_AC	8	7,5	3	27,75	76
1,5	M10 (3xD)	≥ M12	NBK08075C32_1.5ISO_AC	8	7,5	3	32,25	76
1,5	≥ M16		NBK1212D29_1.5ISO_AC	12	12	4	29,25	100
1,5	≥ M20		NBK1616F35_1.5ISO_AC	16	16	6	35,25	120
1,75	M12 (1,5xD)		NBK0808C20_1.75ISO_AC	8	8	3	20,12	76
1,75	M12 (2xD)		NBK0808C27_1.75ISO_AC	8	8	3	27,12	76
1,75	M12 (1,5xD)		NBK1009C20_1.75ISO_AC	10	9	3	20,12	100
1,75	M12 (2xD)		NBK1009C27_1.75ISO_AC	10	9	3	27,12	100
1,75	M12 (2,5xD)		NBK1009C32_1.75ISO_AC	10	9	3	32,37	100
1,75	M12 (3xD)		NBK1009C37_1.75ISO_AC	10	9	3	37,62	100
2,0	M14 (1,5xD)	≥ M18	NBK1010C23_2.0ISO_AC	10	10	3	23	100
2,0	M14 (2xD)	≥ M18	NBK1010C31_2.0ISO_AC	10	10	3	31	100
2,0	M16 (1,5xD)	≥ M18	NBK1212D27_2.0ISO_AC	12	12	4	27	100
2,0	M16 (2xD)	≥ M18	NBK1212D35_2.0ISO_AC	12	12	4	35	100
2,0	M16 (2,5xD)	≥ M18	NBK1212D43_2.0ISO_AC	12	12	4	43	100
2,0	M16 (3xD)	≥ M18	NBK1212C51_2.0ISO_AC	12	12	3	51	100
2,0	≥ M20		NBK1616E39_2.0ISO_AC	16	16	5	39	120
2,5	M20 (1,5xD)		NBK1414D33_2.5ISO_AC	14	14	4	33,75	100
2,5	M20 (2xD)		NBK1414D43_2.5ISO_AC	14	14	4	43,75	100
2,5	M20 (2,5xD)		NBK1615D53_2.5ISO_AC	16	15	4	53,75	120
3,0	M24 (1,5xD)	≥ M30	NBK1616C40_3.0ISO_AC	16	16	3	40,5	120
3,0	M24 (2xD)	≥ M30	NBK1616C52_3.0ISO_AC	16	16	3	52,5	120
3,5	M30 (1,5xD)		NBK2020C50_3.5ISO_AC	20	20	3	50,75	150
3,5	M30 (2xD)		NBK2020C64_3.5ISO_AC	20	20	3	64,75	150



ACTiAlCN coated
Micrograin Carbide**Tolerance**The theoretical external diameter of
the cutter is lasermarked on the tool.**Shank**


Cylindrical h6, DIN6535 HA

Flute

15° right hand spiral

Field of application

Thread Milling of all types of steel

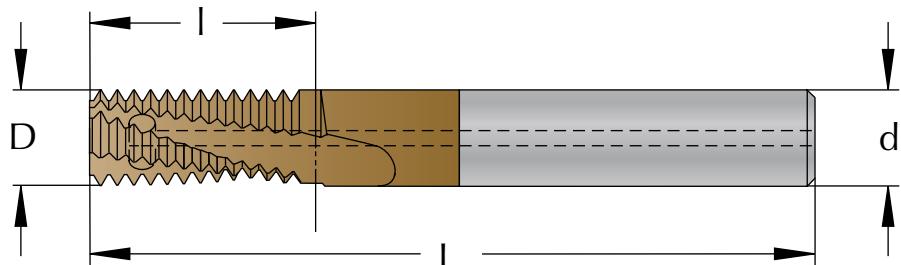**M****METRIC**

Pitch mm	M coarse	M fine	INTERNAL Part Number	d mm	D mm	Cutting edges	I mm	L mm
1,0		≥ M10	NBT0808D17_1.0ISO_AC	8	8	4	17,5	76
1,25	M8 (2xD)	≥ M10	NBT0606C18_1.25ISO_AC	6	6	3	18,12	76
1,5	M10 (2xD)	≥ M12	NBT08075C21_1.5ISO_AC	8	7,5	3	21,75	76
1,5		≥ M16	NBT1212D29_1.5ISO_AC	12	12	4	29,25	100
1,75	M12 (2xD)		NBT0808C27_1.75ISO_AC	8	8	3	27,12	76
1,75	M12 (2xD)		NBT1009C27_1.75ISO_AC	10	9	3	27,12	100
2,0	M14 (2xD)	≥ M18	NBT1010C31_2.0ISO_AC	10	10	3	31	100
2,0	M16 (2xD)	≥ M18	NBT1212D35_2.0ISO_AC	12	12	4	35	100
2,0		≥ M20	NBT1616E39_2.0ISO_AC	16	16	5	39	100

G**WHITWORTH PIPE THREAD**

Pitch TPI	Standard	INTERNAL / EXTERNAL Part Number	d mm	D mm	Cutting edges	I mm	L mm
28	G 1/16 - 1/8	XBT0606C10_28W_AC	6	6	3	10,43	76
19	G 1/4 - 3/8	XBT1010D22_19W_AC	10	10	4	22,06	100
14	G 1/2 - 7/8	XBT1212D28_14W_AC	12	12	4	28,12	100
11	G 1 - 3	XBT1616D40_11W_AC	16	16	4	40,41	100



Micro, one tooth

AC / LC

TiAlCN / AlCrN coated
Micrograin Carbide

Tolerance

D 1,0 - 4,0 +0/-0,050

Shank


Cylindrical h6, DIN6535 HA

Flute

15° right hand spiral

Field of application

Thread Milling of all types of steel

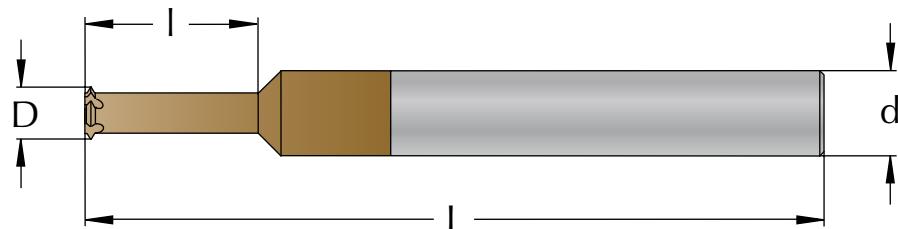

60°

V-PROFILE 60°

M coarse	M fine	UNC UNF	INTERNAL Part Number	d mm	D mm	Cutting edges	I mm	L mm
M1	M1		NS03007C1.7_P60_LC	3	0,7	3	1,7	39
M1	M1		NS03007C2.5_P60_LC	3	0,7	3	2,5	39
M1	M1		NS03007C3.2_P60_LC	3	0,7	3	3,2	39
M1,2	M1,2		NS03009C2.0_P60_LC	3	0,9	3	2	39
M1,2	M1,2		NS03009C2.9_P60_LC	3	0,9	3	2,9	39
M1,2	M1,2		NS03009C3.9_P60_LC	3	0,9	3	3,9	39
M1,4	M1,4		NS03010C2.2_P60_LC	3	1,03	3	2,3	39
M1,4	M1,4		NS03010C3.3_P60_LC	3	1,03	3	3,3	39
M1,4	M1,4		NS03010C4.4_P60_LC	3	1,03	3	4,4	39
M1,6	M1,4	No.0-80	NS03011C2.5_P60_LC	3	1,16	3	2,5	39
M1,6	M1,4	No.0-80	NS03011C3.6_P60_LC	3	1,16	3	3,6	39
M1,6	M1,4	No.0-80	NS03011C5.1_P60_LC	3	1,16	3	5,1	39
M1,8	M1,6	No.1	NS03013C2.8_P60_LC	3	1,35	3	2,8	39
M1,8	M1,6	No.1	NS03013C4.2_P60_LC	3	1,35	3	4,2	39
M1,8	M1,6	No.1	NS03013C5.6_P60_LC	3	1,35	3	5,6	39
M2-M2,2	M1,8-M2	No.2	NS03015C3.8_P60_AC	3	1,5	3	3,8	39
M2-M2,2	M1,8-M2	No.2	NS03015C5.4_P60_AC	3	1,5	3	5,4	39
M2,5	M2,2	No.3	NS03019C4.3_P60_AC	3	1,9	3	4,3	39
M2,5	M2,2	No.3	NS03019C6.2_P60_AC	3	1,9	3	6,2	39
	M2,5	No.4	NS03021C4.9_P60_AC	3	2,1	3	4,9	39
	M2,5	No.4	NS03021C7.1_P60_AC	3	2,1	3	7,1	39
M3		No.5	NS03023C5.4_P60_AC	3	2,3	3	5,4	39
M3		No.5	NS03023C7.8_P60_AC	3	2,3	3	7,8	39
M3,5	M3	No.6	NS03026C6.1_P60_AC	3	2,6	3	6,1	39
M3,5	M3	No.6	NS03026C8.7_P60_AC	3	2,6	3	8,7	39
M4	M3,5-M4	No.8	NS0303C7.1_P60_AC	3	3	3	7,1	39
M4	M3,5-M4	No.8	NS0303C10.2_P60_AC	3	3	3	10,2	39
M4,5	M4,5	No.10	NS04036C8.3_P60_AC	4	3,6	3	8,3	50
M4,5	M4,5	No.10	NS04036C12.0_P60_AC	4	3,6	3	12	50
M5-M6	M5-M6	No.12	NS0404C10.0_P60_AC	4	4	3	10	50
M5-M6	M5-M6	No.12	NS0404C14.5_P60_AC	4	4	3	14,5	50



AC

TiAlCN coated
Micrograin Carbide

Tolerance

The theoretical external diameter of the cutter is lasermarked on the tool.

Shank


Cylindrical h6, DIN6535 HA

Flute


15° right hand spiral

Field of application

Thread Milling of all types of steel

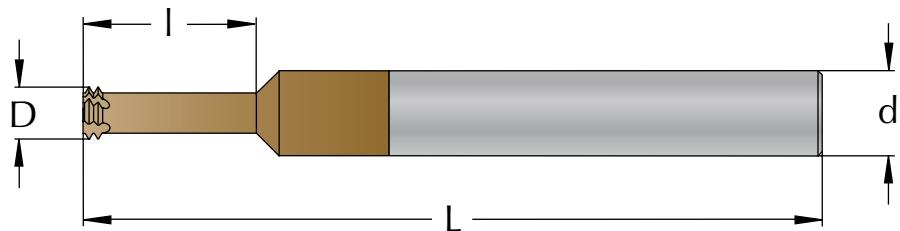
**M****METRIC**

Pitch mm	M coarse	INTERNAL Part Number	d mm	D mm	Cutting edges	I mm	L mm
0,4	M2 (1,5xD)	NM03015C3_0.4ISO_AC	3	1,5	3	3,4	39
0,4	M2 (2,25xD)	NM03015C5_0.4ISO_AC	3	1,5	3	5	39
0,45	M2,2 (1,5xD)	NM03016C3_0.45ISO_AC	3	1,6	3	3,8	39
0,45	M2,2 (2,25xD)	NM03016C5_0.45ISO_AC	3	1,6	3	5,4	39
0,45	M2,5 (1,5xD)	NM03019C4_0.45ISO_AC	3	1,9	3	4,2	39
0,45	M2,5 (2,25xD)	NM03019C6_0.45ISO_AC	3	1,9	3	6,1	39
0,5	M3 (1,5xD)	NM03023C5_0.5ISO_AC	3	2,3	3	5	39
0,5	M3 (2,25xD)	NM03023C7_0.5ISO_AC	3	2,3	3	7,3	39
0,6	M3,5 (1,5xD)	NM03026C6_0.6ISO_AC	3	2,6	3	6	39
0,6	M3,5 (2,25xD)	NM03026C8_0.6ISO_AC	3	2,6	3	8,5	39
0,7	M4 (1,5xD)	NM0303C7_0.7ISO_AC	3	3	3	7	39
0,7	M4 (2,25xD)	NM0303C10_0.7ISO_AC	3	3	3	10	39
0,8	M5 (1,5xD)	NM04038C9_0.8ISO_AC	4	3,8	3	9	50
0,8	M5 (2,25xD)	NM04038C12_0.8ISO_AC	4	3,8	3	12,1	50
1,0	M6 (1,5xD)	NM06045C10_1.0ISO_AC	6	4,5	3	10	63
1,0	M6 (2,25xD)	NM06045C14_1.0ISO_AC	6	4,5	3	14,5	63
1,25	M8 (1,5xD)	NM0606C14_1.25ISO_AC	6	6	3	14	63
1,25	M8 (2,25xD)	NM0606C19_1.25ISO_AC	6	6	3	19,3	63

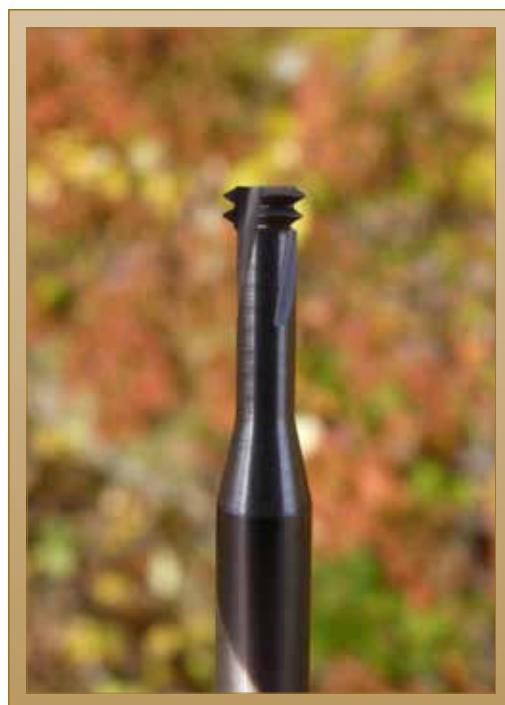


THREAD MILLING CUTTERS

with One Pocket

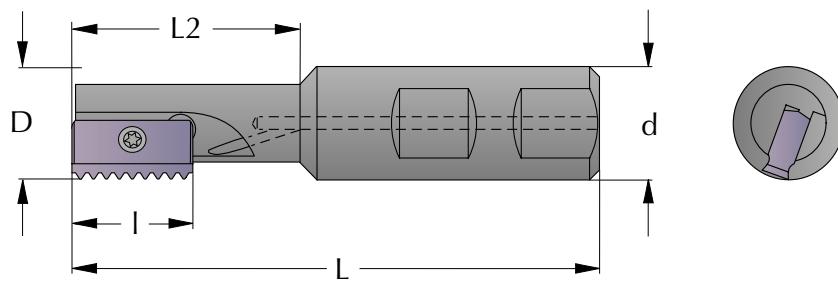

D mm	d mm	Part Number	I mm	L2 mm	L mm	Cutting edges
12	20	SR0012F14	14	20	75	1
14,5	20	SR0014H14	14	25	85	1
17	20	SR0017H14	14	30	85	1
18	20	SR0018H21	21	30	85	1
21	20	SR0021H21	21	40	94	1
25	20	SR0025K21	21	-	125	1
29	25	SR0029J30	30	50	110	1
31	25	SR0031M30	30	-	150	1
38	32	SR0038M30	30	-	150	1
48	40	SR0048M40	40	78	153	1
48	40	SR0048R40	40	-	210	1


with Two Pockets

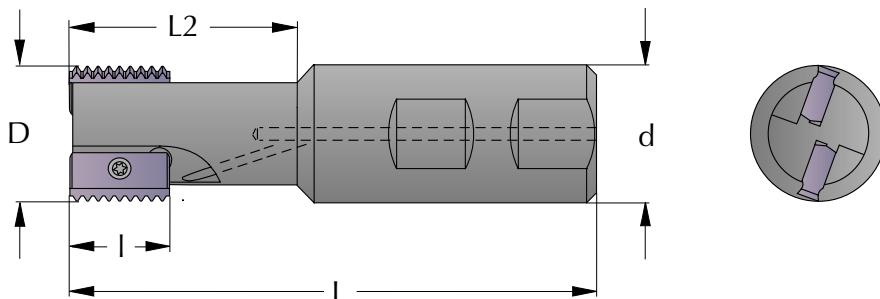

D mm	d mm	Part Number	I mm	L2 mm	L mm	Cutting edges
20	20	SR0020H14-2	14	41	93	2
30	25	SR0030J21-2	21	52	108	2
40	32	SR0040L30-2	30	70	130	2
50	40	SR0050M40-2	40	78	153	2


THREAD MILLING CUTTERS

with Carbide Shank

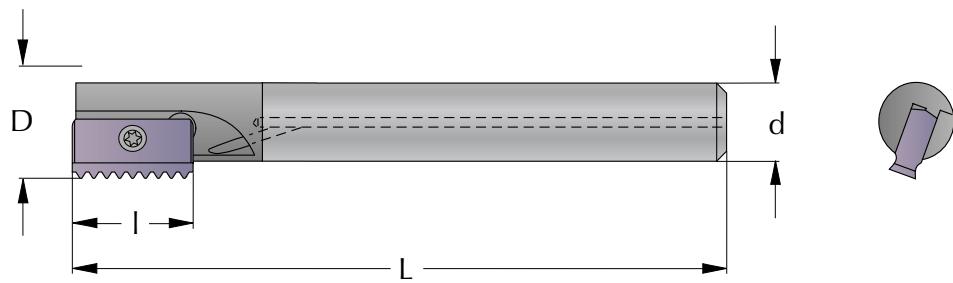

D mm	d mm	Part Number	l mm	L mm	Cutting edges
13	10	SR0013J14C	14	150	1
15	12	SR0015K14C	14	175	1
21	16	SR0021M21C	21	200	1
27	20	SR0027S30C	30	260	1
33	25	SR0033T30C	30	270	1


with Multi Pockets

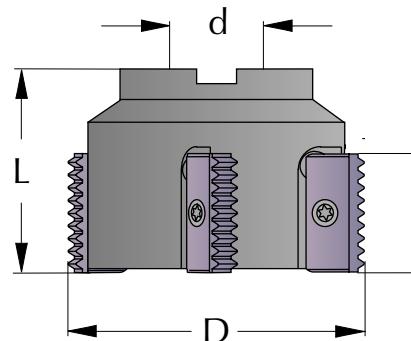

D mm	d mm	Part Number	l mm	L mm	Cutting edges
63	22	SR0063C21-5	21	50	5
63	22	SR0063C30-4	30	50	4
80	27	SR0080D30-4	30	55	4
100	32	SR0100D30-4	30	60	4
80	27	SR0080D40-4	40	65	4
100	32	SR0100E40-4	40	70	4

Spare Parts

Insert mm	Screw to insert	Torx key
14	S14	K14
21	S21	K21
30	S30	K30
40	S40	K40

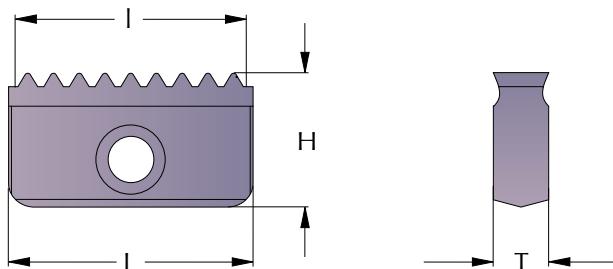

M

METRIC

Pitch mm	M coarse	M fine	INTERNAL Part Number	I mm	L mm	T mm	H mm	Cutting edges
1,0		≥ M16	14I_1.0ISO_FC	14	14	3,1	7,5	2
1,0		≥ M24	21I_1.0ISO_FC	21	21	4,7	12	2
1,5		≥ M16	14I_1.5ISO_FC	13,5	14	3,1	7,5	2
1,5		≥ M24	21I_1.5ISO_FC	21	21	4,7	12	2
1,5		≥ M35	30I_1.5ISO_FC	30	30	5,5	16	2
2,0	M16	≥ M18	14I_2.0ISO_FC	14	14	3,1	7,5	2
2,0		≥ M24	21I_2.0ISO_FC	20	21	4,7	12	2
2,0		≥ M36	30I_2.0ISO_FC	30	30	5,5	16	2
2,0		≥ M56	40I_2.0ISO_FC	40	40	6,3	20	2
2,5	M18-M22		14I_2.5ISO_FC	12,5	14	3,1	7,5	2
3,0	M24	≥ M30	21I_3.0ISO_FC	21	21	4,7	12	2
3,0		≥ M40	30I_3.0ISO_FC	30	30	5,5	16	2
3,0		≥ M58	40I_3.0ISO_FC	39	40	6,3	20	2
3,5	M30-M33		21I_3.5ISO_FC	21	21	4,7	12	2
4,0	M36-M39	≥ M42	30I_4.0ISO_FC	28	30	5,5	16	2
4,0		≥ M64	40I_4.0ISO_FC	40	40	6,3	20	2
4,5	M42-M45		30I_4.5ISO_FC	27	30	5,5	16	2
5,0	M48-M52		30I_5.0ISO_FC	30	30	5,5	16	1
6,0		≥ M72	40I_6.0ISO_FC	36	40	6,3	20	2

G

WHITWORTH PIPE THREAD

Pitch TPI	Standard	INTERNAL / EXTERNAL Part Number	I mm	L mm	T mm	H mm	Cutting edges
19	G 3/8	14X_19W_FC	13,37	14	3,1	7,5	2
14	G 1/2 - 5/8	14X_14W_FC	12,7	14	3,1	7,5	2
14	G 3/4 - 7/8	21X_14W_FC	19,96	21	4,7	12	2
11	G 1	14X_11W_FC	13,85	14	3,1	7,5	1
11	G 1	21X_11W_FC	20,78	21	4,7	12	2
11	G 1 1/8	30X_11W_FC	30,02	30	5,5	16	2
11	G ≥ 2	40X_11W_FC	39,25	40	6,3	20	2

BSPT

BSPT PIPE THREAD

Pitch TPI	Standard	INTERNAL / EXTERNAL Part Number	I mm	L mm	T mm	H mm	Cutting edges
19	Rc 3/8	14X_19BSPT_FC	13,37	14	3,1	7,5	1
14	Rc 1/2 - 5/8	14X_14BSPT_FC	12,7	14	3,1	7,5	1
14	Rc 3/4 - 7/8	21X_14BSPT_FC	19,96	21	4,7	12	1
11	Rc 1	21X_11BSPT_FC	20,78	21	4,7	12	1
11	Rc 1 1/8	30X_11BSPT_FC	30,02	30	5,5	16	1
11	Rc ≥ 2	40X_11BSPT_FC	39,25	40	6,3	20	1

PG

STEEL CONDUIT THREAD DIN 40430

Pitch TPI	Standard	INTERNAL / EXTERNAL Part Number	I mm	L mm	T mm	H mm	Cutting edges
18	Pg 9 - 16	14X_18PG_FC	14,11	14	3,1	7,5	2
18	Pg 13,5 - 16	21X_18PG_FC	21	21	4,7	12	2
16	Pg 21 - 48	21X_16PG_FC	20,64	21	4,7	12	2
16	Pg 29 - 48	30X_16PG_FC	30	30	5,5	16	2

UN**UNIFIED**

Pitch TPI	UNC	UNF	UNEF	INTERNAL Part Number	I mm	L mm	T mm	H mm	Cutting edges
32				14I_32UN_FC	13,49	14	3,1	7,5	2
28				14I_28UN_FC	13,61	14	3,1	7,5	2
24		5/8		14I_24UN_FC	13,75	14	3,1	7,5	2
20		3/4 - 1		14I_20UN_FC	13,97	14	3,1	7,5	2
20		1		21I_20UN_FC	20,32	21	4,7	12	2
20				30I_20UN_FC	29,21	30	5,5	16	2
18		5/8	11/8-15/8	14I_18UN_FC	14,11	14	3,1	7,5	2
18			11/8-15/8	21I_18UN_FC	21,17	21	4,7	12	2
18			11/4-15/8	30I_18UN_FC	29,63	30	5,5	16	2
16		3/4		14I_16UN_FC	12,7	14	3,1	7,5	2
16				21I_16UN_FC	20,64	21	4,7	12	2
16				30I_16UN_FC	30,16	30	5,5	16	2
16				40I_16UN_FC	39,69	40	6,3	20	2
14		7/8		14I_14UN_FC	12,7	14	3,1	7,5	2
14		7/8		21I_14UN_FC	19,96	21	4,7	12	2
12		1-1 1/2		14I_12UN_FC	12,7	14	3,1	7,5	2
12		1 1/8-1 1/2		21I_12UN_FC	21,12	21	4,7	12	2
12		1 1/2		30I_12UN_FC	29,63	30	5,5	16	2
12				40I_12UN_FC	40,22	40	6,3	20	2
10		3/4		14I_10UN_FC	12,7	14	3,1	7,5	2
8				21I_8UN_FC	19,05	21	4,7	12	2
8				30I_8UN_FC	28,57	30	5,5	16	2
8				40I_8UN_FC	38,1	40	6,3	20	2
7		1 1/8-1 1/4		21I_7UN_FC	21,77	21	4,7	12	2
6		1 1/2		30I_6UN_FC	29,63	30	5,5	16	2
6				40I_6UN_FC	38,1	40	6,3	20	2
5		1 3/4		30I_5UN_FC	30,48	30	5,5	16	1
4		3 - 4		40I_4UN_FC	38,1	40	6,3	20	2

NPT**NPT PIPE THREAD**

Pitch TPI	Standard	INTERNAL / EXTERNAL Part Number	I mm	L mm	T mm	H mm	Cutting edges
18	3/8	14X_18NPT_FC	12,7	14	3,1	7,5	1
14	1/2 - 5/8	14X_14NPT_FC	12,7	14	3,1	7,5	1
14	3/4 - 7/8	21X_14NPT_FC	19,96	21	4,7	12	1
11,5	1	21X_11.5NPT_FC	19,88	21	4,7	12	1
11,5	1 1/4 - 2	30X_11.5NPT_FC	28,71	30	5,5	16	1
8	≥ 2 1/2	30X_8NPT_FC	28,58	30	5,5	16	1
8	≥ 2 1/2	40X_8NPT_FC	38,1	40	6,3	20	1

NPTF**NPTF DRYSEAL PIPE THREAD**

Pitch TPI	Standard	INTERNAL / EXTERNAL Part Number	I mm	L mm	T mm	H mm	Cutting edges
18	3/8	14X_18NPTF_FC	12,7	14	3,1	7,5	1
14	1/2 - 5/8	14X_14NPTF_FC	12,7	14	3,1	7,5	1
14	3/4 - 7/8	21X_14NPTF_FC	19,96	21	4,7	12	1
11,5	1	21X_11.5NPTF_FC	19,88	21	4,7	12	1
11,5	1 1/4 - 2	30X_11.5NPTF_FC	28,71	30	5,5	16	1
8	≥ 2 1/2	30X_8NPTF_FC	28,58	30	5,5	16	1
8	≥ 2 1/2	40X_8NPTF_FC	38,1	40	6,3	20	1


■ Part number with I is for internal threadprofile.

■ Part number with X is for in- and external thread profile.

■ For external profile indicate E instead of I. The price is 10% higher for E.

THREAD MILLING CUTTERS

Spiral Fluted

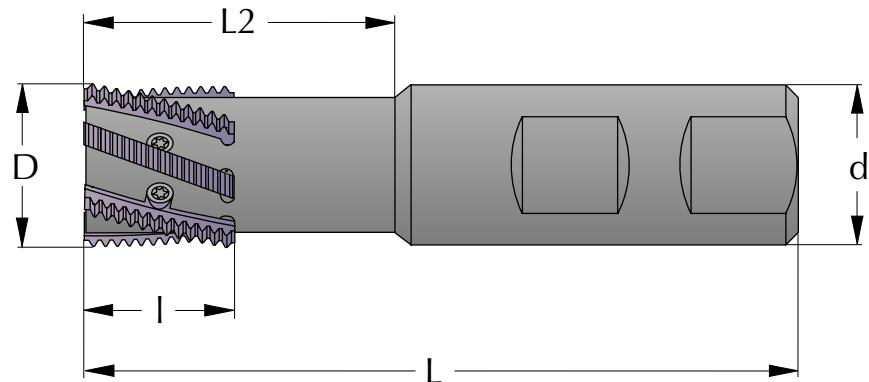


D mm	d mm	Part Number	I mm	L2 mm	L mm	Cutting edges
23	25	SRH23-2	27	50	110	2
32	32	SRH32-5	32	60	130	5
45	32	SRH45-6	37	-	130	6



THREAD MILLING CUTTERS

Spiral Fluted

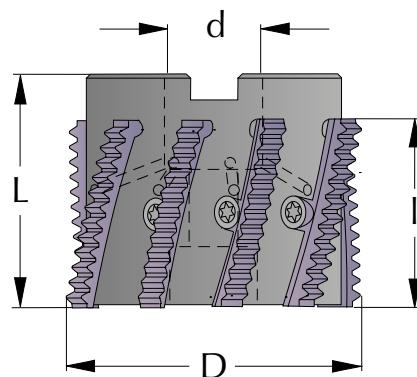


D mm	d mm	Part Number	I mm	L mm	Cutting edges
32	16	SRH32-5M	32	52	5
45	22	SRH45-6M	37	60	6
63	22	SRH63-9	38	50	9

Spare Parts

Insert mm	Screw to insert	Torx key
H23	S23	K21
H32	S32	K22
H45	S45	K40
H63	S63	K40



Spiral Fluted

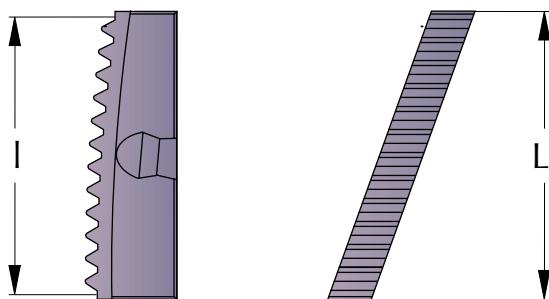

M

METRIC

Pitch mm	M fine	INTERNAL Part Number	I mm	L mm	Cutting edges
1,0	$\geq M27$	H23I_1.0ISO_FC	27	27	1
1,5	$\geq M27$	H23I_1.5ISO_FC	27	27	1
1,5	$\geq M36$	H32I_1.5ISO_FC	31,5	32	1
1,5	$\geq M52$	H45I_1.5ISO_FC	36	37	1
1,5	$\geq M68$	H63I_1.5ISO_FC	37,5	38	1
2,0	$\geq M27$	H23I_2.0ISO_FC	26	27	1
2,0	$\geq M36$	H32I_2.0ISO_FC	32	32	1
2,0	$\geq M52$	H45I_2.0ISO_FC	36	37	1
2,0	$\geq M68$	H63I_2.0ISO_FC	38	38	1
3,0	$\geq M30$	H23I_3.0ISO_FC	27	27	1
3,0	$\geq M39$	H32I_3.0ISO_FC	30	32	1
3,0	$\geq M52$	H45I_3.0ISO_FC	36	37	1
3,0	$\geq M72$	H63I_3.0ISO_FC	36	38	1
3,5	$\geq M30$	H23I_3.5ISO_FC	24,5	27	1
4,0	$\geq M36$	H23I_4.0ISO_FC	24	27	1
4,0	$\geq M42$	H32I_4.0ISO_FC	32	32	1
4,0	$\geq M56$	H45I_4.0ISO_FC	36	37	1
4,0	$\geq M72$	H63I_4.0ISO_FC	36	38	1
4,5	$\geq M42$	H32I_4.5ISO_FC	31,5	32	1
5,0	$\geq M48$	H32I_5.0ISO_FC	30	32	1
5,5	$\geq M56$	H45I_5.5ISO_FC	33	37	1
6,0	$\geq M64$	H45I_6.0ISO_FC	36	37	1
6,0	$\geq M80$	H63I_6.0ISO_FC	36	38	1

G

WHITWORTH PIPE THREAD

Pitch TPI	Standard	INTERNAL / EXTERNAL Part Number	I mm	L mm	Cutting edges
14	G $\geq \frac{7}{8}$	H23X_14W_FC	25,4	27	1
11	G ≥ 1	H23X_11W_FC	25,4	27	1
11	G $\geq 1 \frac{1}{8}$	H32X_11W_FC	30,02	32	1
11	G $\geq 1 \frac{3}{4}$	H45X_11W_FC	36,95	37	1
11	G $\geq 2 \frac{1}{2}$	H63X_11W_FC	36,95	38	1

BSPT

BSPT PIPE THREAD

Pitch TPI	Standard	INTERNAL / EXTERNAL Part Number	I mm	L mm	Cutting edges
11	Rc ≥ 1	H23X_11BSPT_FC	25,4	27	1
11	Rc $\geq 1 \frac{1}{8}$	H32X_11BSPT_FC	30,02	32	1
11	Rc $\geq 1 \frac{3}{4}$	H45X_11BSPT_FC	36,95	37	1
11	Rc $\geq 2 \frac{1}{2}$	H63X_11BSPT_FC	36,95	38	1

NPT**NPT PIPE THREAD**

Pitch TPI	Standard	INTERNAL / EXTERNAL Part Number	I mm	L mm	Cutting edges
11,5	1 - 2	H23X_11.5NPT_FC	26,5	27	1
11,5	1 ¹ / ₄ - 2	H32X_11.5NPT_FC	30,92	32	1
11,5	2	H45X_11.5NPT_FC	35,34	37	1
8	2 ¹ / ₂	H45X_8NPT_FC	34,93	37	1
8	3	H63X_8NPT_FC	38,1	38	1

NPTF**NPTF PIPE THREAD**

Pitch TPI	Standard	INTERNAL / EXTERNAL Part Number	I mm	L mm	Cutting edges
11,5	1 - 2	H23X_11.5NPTF_FC	26,5	27	1
11,5	1 ¹ / ₄ - 2	H32X_11.5NPTF_FC	30,92	32	1

UN**UNIFIED**

Pitch TPI	Standard	INTERNAL Part Number	I mm	L mm	Cutting edges
24	≥ 1	H23I_24UN_FC	26,46	27	1
20	≥ 1 1/16	H23I_20UN_FC	26,67	27	1
20	≥ 1 3/8	H32I_20UN_FC	31,75	32	1
18	≥ 1 1/16	H23I_18UN_FC	26,81	27	1
18	≥ 1 3/8	H32I_18UN_FC	31,04	32	1
16	≥ 1 1/8	H23I_16UN_FC	26,99	27	1
16	≥ 1 1/2	H32I_16UN_FC	31,75	32	1
16	≥ 2	H45I_16UN_FC	36,51	37	1
16	≥ 2 5/8	H63I_16UN_FC	38,1	38	1
12	≥ 1 1/8	H23I_12UN_FC	25,4	27	1
12	≥ 1 1/2	H32I_12UN_FC	31,75	32	1
12	≥ 2	H45I_12UN_FC	35,98	37	1
12	≥ 2 3/4	H63I_12UN_FC	38,1	38	1
8	≥ 1 1/8	H23I_8UN_FC	25,4	27	1
8	≥ 1 1/2	H32I_8UN_FC	31,75	32	1
8	≥ 2 1/8	H45I_8UN_FC	34,93	37	1
8	≥ 2 3/4	H63I_8UN_FC	38,1	38	1
7	≥ 1 1/4	H23I_7UN_FC	25,4	27	1
6	≥ 1 5/8	H32I_6UN_FC	29,63	32	1
6	≥ 2 1/8	H45I_6UN_FC	33,97	37	1
6	≥ 2 7/8	H63I_6UN_FC	38,1	38	1
5	≥ 1 3/4	H32I_5UN_FC	30,48	32	1



THREAD TURNING


CONTENTS



Technical Information	30	
External Toolholders	34	
Internal Toolholders	35	
Thread Turning Inserts	36	
Kit with Different Inserts	43	
External U-Toolholders	44	
Internal U-Toolholders	45	
U-Thread Turning Inserts	46	
Toolholders, Micro	48	
Thread Turning Inserts, Micro	49	

THREAD TURNING INSERTS

Thicker Thread Turning Inserts

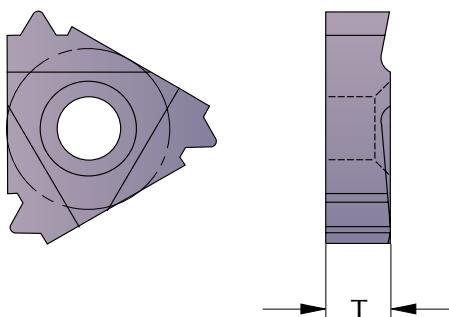


Insert	Standard T (mm)	Insert	Thicker T (mm)
11	3,18	11T	3,32
16	3,68	16T	4,10
22	4,90	22T	5,76


The thicker insert will not fit in toolholders from SmiCut, but can be used with holders for thicker inserts. The inserts are available in the most common profiles for external and internal threading. The price is 15% higher for thicker inserts.

Helix Angle

To get satisfied cutting conditions the threading insert has to be inclined in the toolholder about the same as the helix angle. The toolholder has always as standard an inclination of 1,5° which are the optimal for most threads. You will receive the correct inclination on the threading insert if you use an anvil according to the table below.

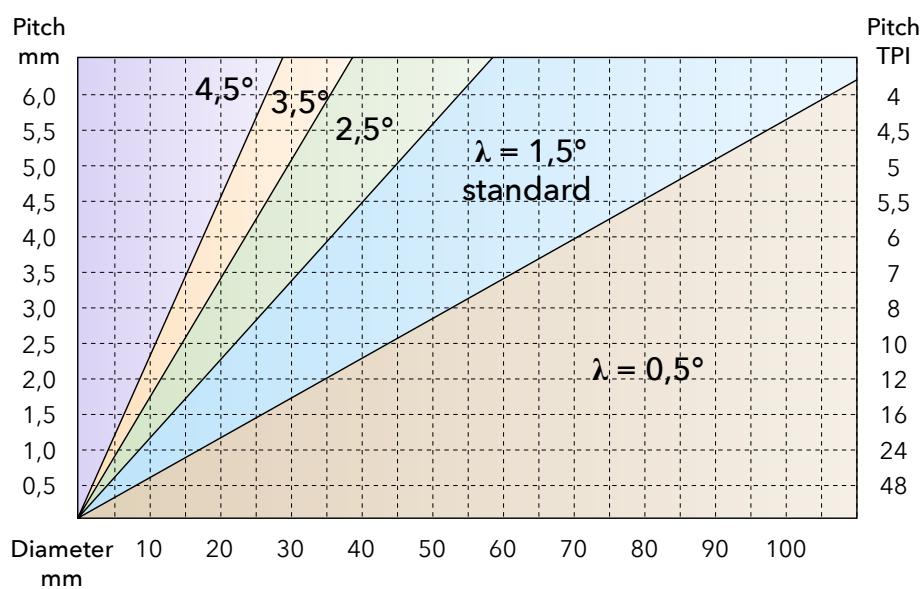


$$\tan \lambda = \frac{P}{\pi \times D}$$

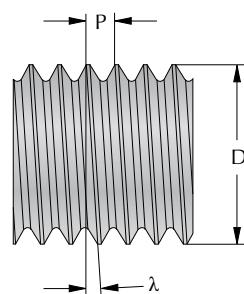


CODE KEY



Toolholders

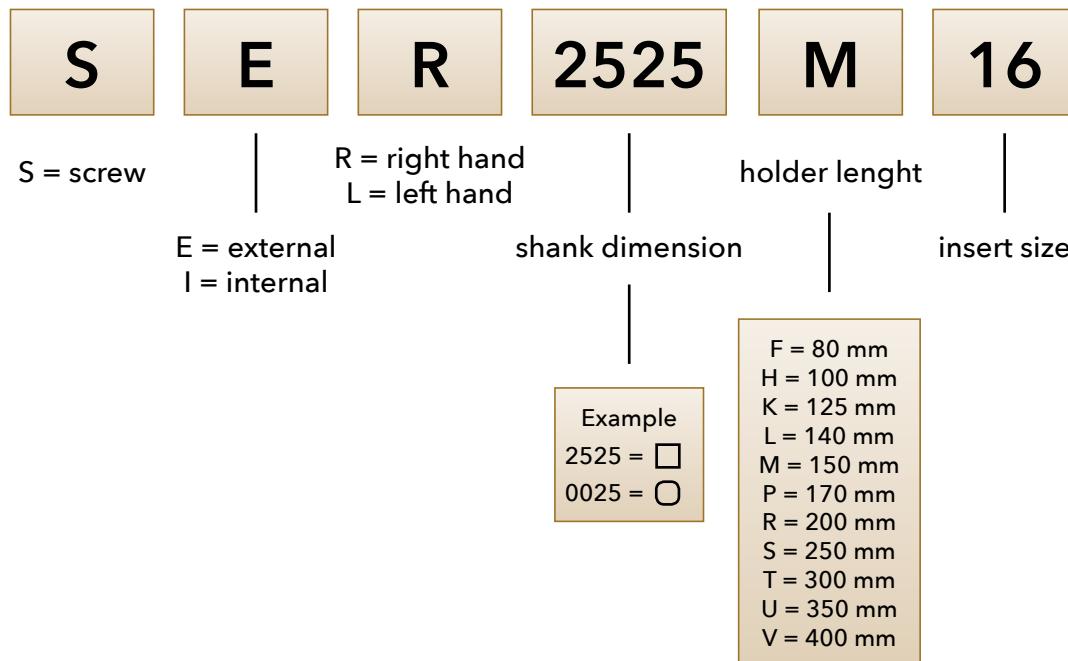

Inserts

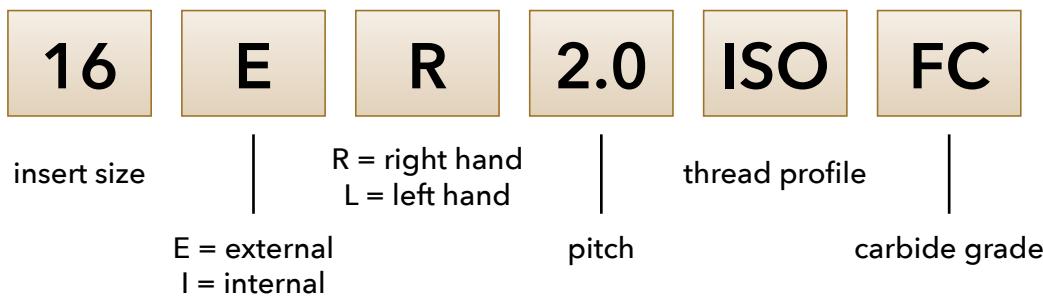

Cutting Speed (V_c) and Material Factor (F_m)

MATERIAL		Hardness HB	Tensile Strength N/mm ²	Cutting Speed (V_c) m/min	Material Factor (F_m)
Steel	Low carbon, C < 0,25%	< 120	< 400	150 - 200	1,2
	Medium carbon, C < 0,55%	< 200	< 700	120 - 170	1,1
	High carbon, C < 0,85%	< 250	< 850	110 - 150	1,0
	Low alloy	< 250	< 850	100 - 140	1,0
	High alloy	< 350	< 1200	70 - 110	0,9
	Hardened, HRC < 45			60 - 100	0,8
	Hardened, HRC < 55			30 - 60	0,7
	Hardened, HRC < 65			20 - 40	0,6
	Lamellar graphite	< 150	< 500	130 - 180	1,2
	Lamellar graphite	< 300	< 1000	100 - 150	1,1
Cast iron	Nodular graphite, malleable	< 200	< 700	100 - 150	1,0
	Nodular graphite, malleable	< 300	< 1000	80 - 120	0,9
	Free machining	< 250	< 850	130 - 180	1,0
	Austenitic	< 250	< 850	90 - 140	0,9
Stainless steel	Ferritic and austenitic	< 300	< 1000	80 - 120	0,8
	Unalloyed	< 200	< 700	60 - 80	0,8
	Alloyed	< 270	< 900	50 - 70	0,7
Titanium	Alloyed	< 350	< 1250	30 - 50	0,6
	Unalloyed	< 150	< 500	80 - 120	0,8
	Alloyed	< 270	< 900	60 - 80	0,7
Nickel	Alloyed	< 350	< 1250	50 - 70	0,6
	Unalloyed	< 150	< 500	80 - 120	0,8
	Alloyed	< 270	< 900	60 - 80	0,7
Copper	Unalloyed	< 100	< 350	150 - 250	1,0
	Brass, bronze	< 200	< 700	130 - 180	1,0
	High strength bronze	< 470	< 1500	60 - 80	0,8
Aluminium	Unalloyed	< 100	< 350	500 - 900	1,4
	Alloyed, Si < 0,5%	< 150	< 500	400 - 800	1,3
	Alloyed, Si < 10%	< 120	< 400	300 - 500	1,2
	Alloyed, Si > 10%	< 120	< 400	200 - 400	1,1
Inconel	718	< 370		50 - 70	0,6
Graphite				300 - 500	1,0

Threading Methods

Tool	RIGHT HAND THREAD		
	Anvil	Rotation	Direction
SER	AE +	↻	←
SEL	AI -	↻	→
SIR	AI +	↻	←
SIL	AE -	↻	→

Tool	LEFT HAND THREAD		
	Anvil	Rotation	Direction
SEL	AI +	↻	←
SER	AE -	↻	→
SIL	AE +	↻	←
SIR	AI -	↻	→

Number of Passes

ISO	UN	W	NPT	Pitch				Material Factor (F_m)				1,2	1,3	1,4
				0,6	0,7	0,8	0,9	1,0	1,1					
0,5				7	6	5	4	4	4	4	4	4	4	4
0,75	32	28		8	6	6	5	4	4	4	4	4	4	4
1,0	28-24	19		8	7	6	6	5	5	4	4	4	4	4
1,25	20			9	8	7	6	6	5	5	4	4	4	4
1,5	18-16	14		10	9	8	7	6	5	5	5	5	5	4
1,75	14			12	10	9	8	7	6	6	5	5	5	5
2,0	13-12		27	14	12	11	9	8	8	7	7	7	6	
2,5	11-10	11	18	16	14	13	11	10	9	8	8	8	7	
3,0	9-8		14	18	16	14	12	11	10	9	8	8	8	
3,5	7			20	17	15	13	12	11	10	9	9	9	
4,0	6		11,5	22	19	16	14	13	12	11	10	10	9	
4,5				23	20	17	15	14	12	11	10	10	10	
5,0	5			24	20	18	16	14	13	12	11	11	10	
5,5	4,5		8	25	21	19	17	15	14	13	12	12	11	
6,0	4			27	23	20	18	16	15	13	12	12	11	

Radial Infeed Each Pass

PASS	Percentage of the total infeed																		
	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
1	33	28	25	22	20	19	18	16	14	12	11	11	11	11	10	10	9		
2	27	24	20	18	17	16	15	14	13	11	10	10	10	10	10	10	9	9	
3	22	19	17	16	15	14	13	12	11	10	9	9	9	9	9	8	8		
4	18	16	15	14	13	12	11	10	9	9	9	8	8	8	9	8	8	8	
5		13	13	12	11	10	9	8	8	8	8	8	8	8	8	8	7	7	
6			10	10	10	9	8	8	8	8	8	7	7	7	7	6	6		
7				8	8	8	7	8	8	7	7	7	7	6	6	6	6		
8					6	7	7	7	7	7	7	7	6	6	6	6	6		
9						5	7	7	7	7	7	6	6	5	6	5	5		
10							5	6	6	6	6	5	5	5	5	5	5		
11								4	5	6	6	5	5	5	5	5	5		
12									4	5	5	5	5	4	4	4	4		
13										4	4	4	4	4	4	4	4		
14											3	4	4	4	3	4	4		
15												3	3	3	3	4	3		
16													2	2	2	3	3		
17														2	2	2	2		
18															2	1,5	2		
19																1,5	1,5		
20																	1,5		

Carbide Grades**FC**


Micrograin Carbide with TiAlN coating.
Allround Grade with high heat resistance.
Use cutting data according to the tables.

BC

Micrograin Carbide with TiN coating.
Suitable for internal thread turning of small dimensions. Cutting speed 40% less than FC.

THREAD TURNING TOOLHOLDERS

external

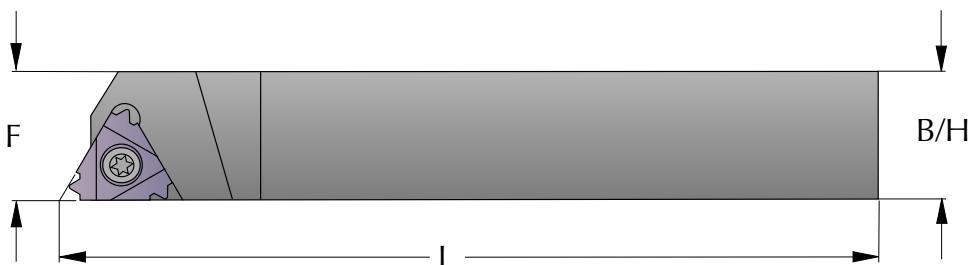

Insert mm	Part Number	B/H mm	L mm	F mm
16	SER_1212_F16	12	80	16
16	SER_1616_H16	16	100	16
16	SER_2020_K16	20	125	20
16	SER_2525_M16	25	150	25
16	SER_3232_P16	32	170	32
22	SER_2525_M22	25	150	25
22	SER_3232_P22	32	170	32
22	SER_4040_R22	40	200	40
27	SER_2525_M27	25	150	32
27	SER_3232_P27	32	170	32
27	SER_4040_R27	40	200	40


Spare Parts

Insert mm	Screw to insert	Torx key	Screw to anvil	Anvil
16	S16	K16	A16	AE16...
22	S22	K22	A22	AE22...
27	S27	K27	A27	AE27...

The Part Numbers are for Right Hand Toolholders. For Left Hand specify L instead of R. Give Helix Angle for Anvil, ex. AE16+0.5

THREAD TURNING TOOLHOLDERS

internal

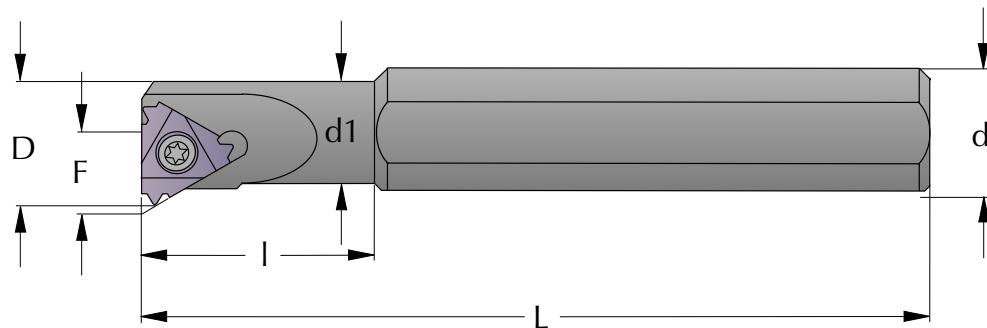

Insert mm	D mm	Part Number	d mm	d1 mm	l mm	L mm	F mm
6	6,0	SIR_0005_H06*	12	5,1	12	100	4,3
8	7,8	SIR_0007_K08*	16	6,6	18	125	5,3
11	12	SIR_0010_H11*	10	10	100	7,4	
11	12	SIR_0010_K11*	16	10	25	125	7,4
11	15	SIR_0013_L11*	16	13	32	140	8,9
16	16	SIR_0013_M16*	16	13	32	150	10,2
16	19	SIR_0016_P16*	20	16	40	170	11,7
16	24	SIR_0020_P16	20	20		170	13,7
16	29	SIR_0025_R16	25	25		200	16,2
16	36	SIR_0032_S16	32	32		250	19,7
16	44	SIR_0040_T16	40	40		300	23,7
22	24	SIR_0020_P22*	20	20		170	15,6
22	29	SIR_0025_R22	25	25		200	18,1
22	38	SIR_0032_S22	32	32		250	21,6
22	46	SIR_0040_T22	40	40		300	25,6
27	40	SIR_0032_S27	32	32		250	22,6
27	48	SIR_0040_T27	40	40		300	26,6
27	58	SIR_0050_U27	50	50		350	31,6
27	68	SIR_0060_V27	60	60		400	36,6

with Carbide Shank and Internal Coolant


Insert mm	D mm	Part Number	d mm	d1 mm	l mm	L mm	F mm
6	6,0	SIR_0005_H06CB*	6	5,1	26	100	4,3
8	7,8	SIR_0007_K08CB*	8	6,6	31	125	5,3
11	12	SIR_0010_M11CB*	10	10	150	7,4	
11	15	SIR_0012_P11CB*	12	12	170	8,4	
16	19	SIR_0016_R16CB*	16	16	200	11,7	
16	23	SIR_0020_S16CB	20	20		250	13,7
16	28	SIR_0025_S16CB	25	25		250	16,2
22	24,5	SIR_0020_S22CB*	20	20		250	15,6

Spare Parts

Insert mm	Screw to Insert	Torx key	Screw to anvil	Anvil
06	S6	K6		
08	S8	K8		
11	S11	K11		
16	S16	K16	A16	AI16...
22	S22	K22	A22	AI22...
27	S27	K27	A27	AI27...

*Toolholder without anvil

THREAD TURNING INSERTS

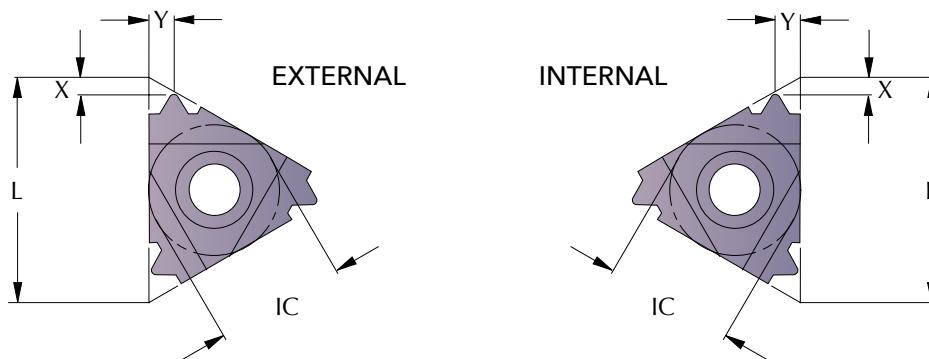

M

METRIC

Pitch mm	L mm	IC inch	EXTERNAL Part Number	X mm	Y mm	INTERNAL Part Number	X mm	Y mm
0,5	6	5/32				06IR_0.5ISO_BC	0,9	0,5
0,5	16	3/8	16ER_0.5ISO_FC	0,6	0,6			
0,7	16	3/8	16ER_0.7ISO_FC	0,6	0,6			
0,75	6	5/32				06IR_0.75ISO_BC	0,8	0,5
0,75	8	3/16				08IR_0.75ISO_BC	0,6	0,5
0,75	16	3/8	16ER_0.75ISO_FC	0,6	0,6			
0,8	16	3/8	16ER_0.8ISO_FC	0,6	0,6			
1,0	6	5/32				06IR_1.0ISO_BC	0,7	0,6
1,0	8	3/16				08IR_1.0ISO_BC	0,6	0,6
1,0	11	1/4				11IR_1.0ISO_FC	0,6	0,7
1,0	16	3/8	16ER_1.0ISO_FC	0,7	0,7	16IR_1.0ISO_FC	0,6	0,7
1,25	6	5/32				06IR_1.25ISO_BC	0,6	0,6
1,25	8	3/16				08IR_1.25ISO_BC	0,6	0,7
1,25	11	1/4				11IR_1.25ISO_FC	0,8	0,8
1,25	16	3/8	16ER_1.25ISO_FC	0,8	0,9	16IR_1.25ISO_FC	0,8	0,9
1,5	8	3/16				08IR_1.5ISO_BC	0,6	0,7
1,5	11	1/4				11IR_1.5ISO_FC	0,8	1,0
1,5	16	3/8	16ER_1.5ISO_FC	0,8	1,0	16IR_1.5ISO_FC	0,8	1,0
1,75	8	3/16				08IR_1.75ISO_BC	1,0	0,8
1,75	16	3/8	16ER_1.75ISO_FC	0,9	1,2			
2,0	11	1/4				11IR_2.0ISO_FC	0,8	0,9
2,0	16	3/8	16ER_2.0ISO_FC	1,0	1,3	16IR_2.0ISO_FC	1,0	1,3
2,5	16	3/8	16ER_2.5ISO_FC	1,1	1,5	16IR_2.5ISO_FC	1,1	1,5
3,0	16	3/8	16ER_3.0ISO_FC	1,2	1,6	16IR_3.0ISO_FC	1,1	1,5
3,5	16	3/8	16ER_3.5ISO_FC	1,2	1,7	16IR_3.5ISO_FC	1,2	1,7
3,5	22	1/2	22ER_3.5ISO_FC	1,6	2,3	22IR_3.5ISO_FC	1,6	2,3
4,0	22	1/2	22ER_4.0ISO_FC	1,6	2,3	22IR_4.0ISO_FC	1,6	2,3
4,5	22	1/2	22ER_4.5ISO_FC	1,7	2,4	22IR_4.5ISO_FC	1,6	2,4
5,0	22	1/2	22ER_5.0ISO_FC	1,7	2,5	22IR_5.0ISO_FC	1,6	2,3
5,5	22	1/2	22ER_5.5ISO_FC	1,7	2,6	22IR_5.5ISO_FC	1,6	2,3
5,5	27	5/8	27ER_5.5ISO_FC	1,9	2,7	27IR_5.5ISO_FC	1,6	2,3
6,0	22	1/2	22ER_6.0ISO_FC	1,9	2,7	22IR_6.0ISO_FC	1,6	2,4
6,0	27	5/8	27ER_6.0ISO_FC	2,0	2,9	27IR_6.0ISO_FC	1,8	2,5
WITH SINTERED CHIPBREAKER								
1,0	16	3/8	16ER_1.0ISOFCB_FC	0,7	0,7	16IR_1.0ISOFCB_FC	0,6	0,7
1,25	16	3/8	16ER_1.25ISOFCB_FC	0,8	0,9			
1,5	16	3/8	16ER_1.5ISOFCB_FC	0,8	1,0	16IR_1.5ISOFCB_FC	0,8	1,0
1,75	16	3/8	16ER_1.75ISOFCB_FC	0,9	1,2			
2,0	16	3/8	16ER_2.0ISOFCB_FC	1,0	1,3	16IR_2.0ISOFCB_FC	1,0	1,3
2,5	16	3/8	16ER_2.5ISOFCB_FC	1,1	1,5	16IR_2.5ISOFCB_FC	1,1	1,5
3,0	16	3/8	16ER_3.0ISOFCB_FC	1,2	1,6	16IR_3.0ISOFCB_FC	1,1	1,5
MULTITOOTH								
1,0	16	3/8	16ER_1.0ISO3M_FC	1,7	2,5	16IR_1.0ISO3M_FC	1,7	2,5
1,5	16	3/8	16ER_1.5ISO2M_FC	1,5	2,3	16IR_1.5ISO2M_FC	1,5	2,3
1,5	22	1/2	22ER_1.5ISO3M_FC	2,3	3,7	22IR_1.5ISO3M_FC	2,3	3,7
2,0	22	1/2	22ER_2.0ISO2M_FC	2,0	3,0	22IR_2.0ISO2M_FC	2,0	3,0
2,0	22	1/2	22ER_2.0ISO3M_FC	3,1	5,0	22IR_2.0ISO3M_FC	3,1	5,0
3,0	27	5/8	27ER_3.0ISO2M_FC	2,9	4,5	27IR_3.0ISO2M_FC	2,9	4,5

THREAD TURNING INSERTS



UN

UNIFIED

Pitch TPI	L mm	IC inch	EXTERNAL Part Number	X mm	Y mm	INTERNAL Part Number	X mm	Y mm
32	6	5/32				06IR_32UN_BC	0,8	0,5
32	8	3/16				08IR_32UN_BC	0,6	0,5
32	11	1/4				11IR_32UN_FC	0,6	0,6
32	16	3/8	16ER_32UN_FC	0,6	0,6	16IR_32UN_FC	0,6	0,6
28	6	5/32				06IR_28UN_BC	0,8	0,6
28	8	3/16				08IR_28UN_BC	0,6	0,6
28	11	1/4				11IR_28UN_FC	0,6	0,7
28	16	3/8	16ER_28UN_FC	0,6	0,7	16IR_28UN_FC	0,6	0,7
24	6	5/32				06IR_24UN_BC	0,7	0,6
24	8	3/16				08IR_24UN_BC	0,6	0,6
24	11	1/4				11IR_24UN_FC	0,7	0,8
24	16	3/8	16ER_24UN_FC	0,7	0,8			
20	6	5/32				06IR_20UN_BC	0,6	0,6
20	8	3/16				08IR_20UN_BC	0,6	0,7
20	11	1/4				11IR_20UN_FC	0,8	0,9
20	16	3/8	16ER_20UN_FC	0,8	0,9	16IR_20UN_FC	0,8	0,9
18	6	5/32				06IR_18UN_BC	0,6	0,7
18	11	1/4				11IR_18UN_FC	0,8	1,0
18	16	3/8	16ER_18UN_FC	0,8	1,0			
16	8	3/16				08IR_16UN_BC	0,6	0,7
16	11	1/4				11IR_16UN_FC	0,9	1,1
16	16	3/8	16ER_16UN_FC	0,9	1,1	16IR_16UN_FC	0,9	1,1
14	8	3/16				08IR_14UN_BC	0,6	0,8
14	16	3/8	16ER_14UN_FC	1,0	1,2	16IR_14UN_FC	0,9	1,2
13	16	3/8	16ER_13UN_FC	1,0	1,3			
12	11	1/4				11IR_12UN_FC	0,9	1,1
12	16	3/8	16ER_12UN_FC	1,1	1,4	16IR_12UN_FC	1,1	1,4
11	11	1/4				11IR_11UN_FC	0,8	1,1
11	16	3/8	16ER_11UN_FC	1,1	1,5			
10	16	3/8	16ER_10UN_FC	1,1	1,5	16IR_10UN_FC	1,1	1,5
9	16	3/8	16ER_9UN_FC	1,2	1,7	16IR_9UN_FC	1,2	1,7
8	16	3/8	16ER_8UN_FC	1,2	1,6	16IR_8UN_FC	1,1	1,5
7	22	1/2	22ER_7UN_FC	1,6	2,3	22IR_7UN_FC	1,6	2,3
6	22	1/2	22ER_6UN_FC	1,6	2,3	22IR_6UN_FC	1,6	2,3
5	22	1/2	22ER_5UN_FC	1,7	2,5	22IR_5UN_FC	1,6	2,3
4,5	27	5/8	27ER_4.5UN_FC	1,9	2,7	27IR_4.5UN_FC	1,7	2,4
4	27	5/8	27ER_4UN_FC	2,1	3,0	27IR_4UN_FC	1,8	2,7
MULTITOOTH								
16	16	3/8	16ER_16UN2M_FC	1,5	2,3	16IR_16UN2M_FC	1,5	2,3
16	16	3/8	22ER_16UN3M_FC	2,5	4,0	22IR_16UN3M_FC	2,5	4,0
12	22	1/2	22ER_12UN2M_FC	2,2	3,4	22IR_12UN2M_FC	2,2	3,4
12	22	1/2	22ER_12UN3M_FC	3,3	5,3	22IR_12UN3M_FC	3,3	5,3
8	27	5/8	27ER_8UN2M_FC	3,1	4,9	27IR_8UN2M_FC	3,1	4,9

The Part Numbers are for Right Hand Inserts. For Left Hand specify L instead of R. The Price is 10% higher for L.

The Price is 15% Higher for Thicker Thread Turning Inserts. Ex 16TER...

All Inserts have ground profile and chipbreaker if nothing else is indicated.

THREAD TURNING INSERTS

G

WHITWORTH PIPE THREAD

Pitch TPI	L mm	IC inch	EXTERNAL Part Number	X mm	Y mm	INTERNAL Part Number	X mm	Y mm
28	8	3/16				08IR_28W_BC	0,6	0,6
28	16	3/8	16ER_28W_FC	0,6	0,7			
19	8	3/16				08IR_19W_BC	0,6	0,7
19	11	1/4				11IR_19W_FC	0,8	1,0
19	16	3/8	16ER_19W_FC	0,8	1,0			
14	16	3/8	16ER_14W_FC	1,0	1,2	16IR_14W_FC	1,0	1,2
11	16	3/8	16ER_11W_FC	1,1	1,5	16IR_11W_FC	1,1	1,5
WITH SINTERED CHIPBREAKER								
19	16	3/8	16ER_19WCB_FC	0,8	1,0			
14	16	3/8	16ER_14WCB_FC	1,0	1,2	16IR_14WCB_FC	1,0	1,2
11	16	3/8	16ER_11WCB_FC	1,1	1,5	16IR_11WCB_FC	1,1	1,5
MULTITOOTH								
14	16	3/8	16ER_14W2M_FC	1,7	2,7	16IR_14W2M_FC	1,7	2,7
14	22	1/2	22ER_14W3M_FC	2,8	4,5	22IR_14W3M_FC	2,8	4,5
11	22	1/2	22ER_11W2M_FC	2,3	3,4	22IR_11W2M_FC	2,3	3,4

■ A wider program of whitworth profiles are available.

BSPT

BSPT PIPE THREAD

Pitch TPI	L mm	IC inch	EXTERNAL Part Number	X mm	Y mm	INTERNAL Part Number	X mm	Y mm
14	16	3/8	16ER_14BSPT_FC	1,0	1,2	16IR_14BSPT_FC	1,0	1,2
11	16	3/8	16ER_11BSPT_FC	1,1	1,5	16IR_11BSPT_FC	1,1	1,5

NPT

NPT PIPE THREAD

Pitch TPI	L mm	IC inch	EXTERNAL Part Number	X mm	Y mm	INTERNAL Part Number	X mm	Y mm
27	6	5/32				06IR_27NPT_BC	0,6	0,6
27	8	3/16				08IR_27NPT_BC	0,6	0,6
27	16	3/8	16ER_27NPT_FC	0,7	0,8			
18	8	3/16				08IR_18NPT_BC	0,6	0,6
18	11	1/4				11IR_18NPT_FC	0,8	1,0
18	16	3/8	16ER_18NPT_FC	0,8	1,0			
14	16	3/8	16ER_14NPT_FC	0,9	1,2	16IR_14NPT_FC	0,9	1,2
11,5	16	3/8	16ER_11.5NPT_FC	1,1	1,5	16IR_11.5NPT_FC	1,1	1,5
8	16	3/8	16ER_8NPT_FC	1,3	1,8	16IR_8NPT_FC	1,3	1,8
MULTITOOTH								
11,5	22	1/2	22ER_11.5NPT2M_FC	2,3	3,5	22IR_11.5NPT2M_FC	2,3	3,5
11,5	27	5/8	27ER_11.5NPT3M_FC	3,3	5,5	27IR_11.5NPT3M_FC	3,3	5,5
8	27	5/8	27ER_8NPT2M_FC	3,1	5,0	27IR_8NPT2M_FC	3,1	5,0

NPTF

NPTF DRYSEAL PIPE THREAD

Pitch TPI	L mm	IC inch	EXTERNAL Part Number	X mm	Y mm	INTERNAL Part Number	X mm	Y mm
27	6	5/32				06IR_27NPTF_BC	0,7	0,6
27	8	3/16				08IR_27NPTF_BC	0,6	0,6
27	16	3/8	16ER_27NPTF_FC	0,7	0,7			
18	8	3/16				08IR_18NPTF_BC	0,6	0,6
18	11	1/4				11IR_18NPTF_FC	0,8	1,0
18	16	3/8	16ER_18NPTF_FC	0,8	1,0			
14	16	3/8	16ER_14NPTF_FC	0,9	1,2	16IR_14NPTF_FC	0,9	1,2
11,5	16	3/8	16ER_11.5NPTF_FC	1,1	1,5	16IR_11.5NPTF_FC	1,1	1,5
8	16	3/8	16ER_8NPTF_FC	1,3	1,8	16IR_8NPTF_FC	1,3	1,8

THREAD TURNING INSERTS



60°

PARTIAL PROFILE 60°

Pitch mm	TPI	L mm	IC inch	EXTERNAL Part Number	INTERNAL Part Number	X mm	Y mm
0,5-1,25	48-20	6	5/32		06IR_A60_BC	0,6	0,6
0,5-1,5	48-16	8	3/16		08IR_A60_BC	0,6	0,7
0,5-1,5	48-16	11	1/4		11IR_A60_FC	0,8	0,9
0,5-1,5	48-16	16	3/8	16ER_A60_FC	16IR_A60_FC	0,8	0,9
1,75-3,0	14-8	16	3/8	16ER_G60_FC	16IR_G60_FC	1,2	1,7
0,5-3,0	48-8	16	3/8	16ER_AG60_FC	16IR_AG60_FC	1,2	1,7
3,5-5,0	7-5	22	1/2	22ER_N60_FC	22IR_N60_FC	1,7	2,5
5,5-6,0	4,5-4	27	5/8	27ER_Q60_FC	27IR_Q60_FC	2,1	3,1

55°

PARTIAL PROFILE 55°

Pitch mm	TPI	L mm	IC inch	EXTERNAL Part Number	INTERNAL Part Number	X mm	Y mm
0,5-1,25	48-20	6	5/32		06IR_A55_BC	0,5	0,6
0,5-1,5	48-16	8	3/16		08IR_A55_BC	0,6	0,7
0,5-1,5	48-16	11	1/4		11IR_A55_FC	0,8	0,9
0,5-1,5	48-16	16	3/8	16ER_A55_FC	16IR_A55_FC	0,8	0,9
1,75-3,0	14-8	16	3/8	16ER_G55_FC	16IR_G55_FC	1,2	1,7
0,5-3,0	48-8	16	3/8	16ER_AG55_FC	16IR_AG55_FC	1,2	1,7
3,5-5,0	7-5	22	1/2	22ER_N55_FC	22IR_N55_FC	1,7	2,5
5,5-6,0	4,5-4	27	5/8	27ER_Q55_FC	27IR_Q55_FC	2,0	2,9

ABUT

AMERICAN BUTTRESS

Pitch TPI	L mm	IC inch	EXTERNAL Part Number	X mm	Y mm	INTERNAL Part Number	X mm	Y mm
20	11	1/4				11IR_20ABUT_FC	1,0	1,3
16	11	1/4				11IR_16ABUT_FC	1,0	1,5
20	16	3/8	16ER_20ABUT_FC	1,0	1,3	16IR_20ABUT_FC	1,0	1,3
16	16	3/8	16ER_16ABUT_FC	1,0	1,5	16IR_16ABUT_FC	1,0	1,5
12	16	3/8	16ER_12ABUT_FC	1,4	2,0	16IR_12ABUT_FC	1,4	2,0
10	16	3/8	16ER_10ABUT_FC	1,5	2,3	16IR_10ABUT_FC	1,5	2,3
8	22	1/2	22ER_8ABUT_FC	2,1	3,3	22IR_8ABUT_FC	2,1	3,3
6	22	1/2	22ER_6ABUT_FC	2,1	3,4	22IR_6ABUT_FC	2,1	3,4

SG

BUTTRESS (SÄGENGEWINDE) DIN 513

Pitch mm	L mm	IC inch	EXTERNAL Part Number	X mm	Y mm	INTERNAL Part Number	X mm	Y mm
2,0	16	3/8	16ER_2.0SG_FC	1,1	1,6	16IR_2.0SG_FC	1,2	1,7
3,0	22	3/8	22ER_3.0SG_FC	1,5	2,4	22IR_3.0SG_FC	1,9	2,9
4,0	22	1/2	22ER_4.0SG_FC	1,9	3,1	22IR_4.0SG_FC	2,3	3,5

PG

STEEL CONDUIT THREAD DIN 40430

Pitch TPI	L mm	IC inch	EXTERNAL Part Number	X mm	Y mm	INTERNAL Part Number	X mm	Y mm
20	8	3/16				08IR_20PG_BC	0,6	0,7
18	11	1/4				11IR_18PG_FC	0,8	0,9
20	16	3/8	16ER_20PG_FC	0,7	0,8		0,7	0,8
18	16	3/8	16ER_18PG_FC	0,8	0,9	16IR_18PG_FC	0,8	0,9
16	16	3/8	16ER_16PG_FC	0,8	1,0	16IR_16PG_FC	0,8	1,0

The Part Numbers are for Right Hand Inserts. For Left Hand specify L instead of R. The Price is 10% higher for L.

THREAD TURNING INSERTS

TR

TRAPEZ DIN 103

Pitch mm	L mm	IC inch	EXTERNAL Part Number	X mm	Y mm	INTERNAL Part Number	X mm	Y mm
1,5	16	3/8	16ER_1.5TR_FC	1,0	1,1			
2,0	16	3/8	16ER_2.0TR_FC	1,0	1,3	16IR_2.0TR_FC	1,0	1,3
3,0	16	3/8	16ER_3.0TR_FC	1,3	1,5	16IR_3.0TR_FC	1,3	1,5
4,0	22	1/2	22ER_4.0TR_FC	1,8	1,9	22IR_4.0TR_FC	1,8	1,9
5,0	22	1/2	22ER_5.0TR_FC	2,0	2,4	22IR_5.0TR_FC	2,0	2,4
6,0	22	1/2	22ER_6.0TR_FC	2,0	2,4	22IR_6.0TR_FC	2,0	2,4
6,0	27	5/8	27ER_6.0TR_FC	2,3	2,7	27IR_6.0TR_FC	2,3	2,7
7,0	27	5/8	27ER_7.0TR_FC	2,2	2,6	27IR_7.0TR_FC	2,2	2,6

RD

ROUND DIN 405

Pitch TPI	L mm	IC inch	EXTERNAL Part Number	X mm	Y mm	INTERNAL Part Number	X mm	Y mm
10	16	3/8	16ER_10RD_FC	1,1	1,2	16IR_10RD_FC	1,1	1,2
8	16	3/8	16ER_8RD_FC	1,4	1,3	16IR_8RD_FC	1,4	1,4
6	16	3/8	16ER_6RD_FC	1,5	1,7	16IR_6RD_FC	1,4	1,5
6	22	1/2	22ER_6RD_FC	1,5	1,7	22IR_6RD_FC	1,5	1,7
4	22	1/2	22ER_4RD_FC	2,2	2,3	22IR_4RD_FC	2,2	2,3
4	27	5/8	27ER_4RD_FC	2,2	2,3	27IR_4RD_FC	2,2	2,3

ACME

ACME

Pitch TPI	L mm	IC inch	EXTERNAL Part Number	X mm	Y mm	INTERNAL Part Number	X mm	Y mm
16	11	1/4				11IR_16ACME_FC	0,9	1,0
16	16	3/8	16ER_16ACME_FC	0,9	1,0	16IR_16ACME_FC	0,9	1,0
14	16	3/8	16ER_14ACME_FC	1,0	1,2	16IR_14ACME_FC	1,0	1,2
12	16	3/8	16ER_12ACME_FC	1,1	1,2	16IR_12ACME_FC	1,1	1,2
10	16	3/8	16ER_10ACME_FC	1,3	1,3	16IR_10ACME_FC	1,3	1,3
8	16	3/8	16ER_8ACME_FC	1,5	1,5	16IR_8ACME_FC	1,5	1,5
6	16	3/8	16ER_6ACME_FC	1,7	1,8	16IR_6ACME_FC	1,7	1,8
6	22	1/2	22ER_6ACME_FC	1,8	2,1	22IR_6ACME_FC	1,8	2,1
5	22	1/2	22ER_5ACME_FC	2,0	2,3	22IR_5ACME_FC	2,0	2,3
4	27	5/8	27ER_4ACME_FC	2,3	2,7	27IR_4ACME_FC	2,3	2,7

STACME

STUB ACME

Pitch TPI	L mm	IC inch	EXTERNAL Part Number	X mm	Y mm	INTERNAL Part Number	X mm	Y mm
16	16	3/8	16ER_16STACME_FC	1,0	1,0	16IR_16STACME_FC	1,0	1,0
14	16	3/8	16ER_14STACME_FC	1,1	1,1	16IR_14STACME_FC	1,1	1,1
12	16	3/8	16ER_12STACME_FC	1,2	1,2	16IR_12STACME_FC	1,2	1,2
10	16	3/8	16ER_10STACME_FC	1,3	1,3	16IR_10STACME_FC	1,3	1,3
8	16	3/8	16ER_8STACME_FC	1,5	1,5	16IR_8STACME_FC	1,5	1,5
6	16	1/2	16ER_6STACME_FC	1,8	1,8	16IR_6STACME_FC	1,8	1,8
5	22	1/2	22ER_5STACME_FC	2,0	2,3	22IR_5STACME_FC	2,0	2,3
4	27	5/8	27ER_4STACME_FC	2,3	2,4	27IR_4STACME_FC	2,3	2,4
3	27	5/8	27ER_3STACME_FC	2,8	2,9	27IR_3STACME_FC	2,8	2,9

The Part Numbers are for Right Hand Inserts. For Left Hand specify L instead of R. The Price is 10% higher for L.

THREAD TURNING INSERTS



API RD

API ROUND OIL THREAD

Pitch TPI	L mm	IC inch	Taper IPF	EXTERNAL Part Number	INTERNAL Part Number	X mm	Y mm
10	16	3/8	0,75	16ER_10APIRD_FC	16IR_10APIRD_FC	1,5	1,4
8	16	3/8	0,75	16ER_8APIRD_FC	16IR_8APIRD_FC	1,3	1,6
MULTITOOTH							
10	22	1/2	0,75	22ER_10APIRD2M_FC	22IR_10APIRD2M_FC	2,4	3,7
10	27	5/8	0,75	27ER_10APIRD3M_FC	27IR_10APIRD3M_FC	3,8	6,2
8	27	5/8	0,75	27ER_8APIRD2M_FC	27IR_8APIRD2M_FC	3,0	4,5

V-0.040

V-0.040 OIL THREAD

Pitch TPI	L mm	IC inch	Taper IPF	EXTERNAL Part Number	INTERNAL Part Number	X mm	Y mm	Connection or Size
5	22	1/2	3	22ER_5API403_FC	22IR_5API403_FC	1,8	2,5	2 3/8 - 4 1/2 REG

V-0.038R

V-0.038R OIL THREAD

Pitch TPI	L mm	IC inch	Taper IPF	EXTERNAL Part Number	INTERNAL Part Number	X mm	Y mm	Connection or Size
4	27	5/8	2	27ER_4API382_FC	27IR_4API382_FC	2,1	2,8	NC23-NC50
4	27	5/8	3	27ER_4API383_FC	27IR_4API383_FC	2,1	2,8	NC56-NC77

V-0.050

V-0.050 OIL THREAD

Pitch TPI	L mm	IC inch	Taper IPF	EXTERNAL Part Number	INTERNAL Part Number	X mm	Y mm	Connection or Size
4	27	5/8	2	27ER_4API502_FC	27IR_4API502_FC	2,0	3,0	6 5/8 REG
4	27	5/8	3	27ER_4API503_FC	27IR_4API503_FC	2,0	3,0	5 1/2, 7 5/8, 8 5/8 REG

EL

EXTREME - LINE CASING OIL THREAD

Pitch TPI	L mm	IC inch	Taper IPF	EXTERNAL Part Number	INTERNAL Part Number	X mm	Y mm	Connection or Size
6	22	1/2	1,50	22ER_6EL1.5_FC	22IR_6EL1.5_FC	1,9	1,9	5 - 7 5/8
5	22	1/2	1,25	22ER_5EL1.25_FC	22IR_5EL1.25_FC	2,4	2,3	8 5/8 - 10 3/4

BUT

BUTTRESS CASING OIL THREAD

Pitch TPI	L mm	IC inch	Taper IPF	EXTERNAL Part Number	INTERNAL Part Number	X mm	Y mm	Connection or Size
5	22	1/2	0,75	22ER_5BUT0.75_FC	22IR_5BUT0.75_FC	2,2	2,4	4 1/2 - 13 3/8
5	22	1/2	1,00	22ER_5BUT1.0_FC	22IR_5BUT1.0_FC	2,3	2,4	16 - 20

THREAD TURNING INSERTS

MJ

METRIC

Pitch mm	L mm	IC inch	EXTERNAL Part Number	X mm	Y mm	INTERNAL Part Number	X mm	Y mm
1,0	11	1/4				11IR_1.0MJ_FC	0,6	0,7
1,0	16	3/8	16ER_1.0MJ_FC	0,7	0,7	16IR_1.0MJ_FC	0,6	0,7
1,25	11	1/4				11IR_1.25MJ_FC	0,8	0,8
1,25	16	3/8	16ER_1.25MJ_FC	0,8	0,9	16IR_1.25MJ_FC	0,8	0,9
1,5	11	1/4				11IR_1.5MJ_FC	0,8	1,0
1,5	16	3/8	16ER_1.5MJ_FC	0,8	1,0	16IR_1.5MJ_FC	0,8	1,0
2,0	11	1/4				11IR_2.0MJ_FC	0,8	0,9
2,0	16	3/8	16ER_2.0MJ_FC	1,0	1,3	16IR_2.0MJ_FC	1,0	1,3

UNJ

UNIFIED

Pitch TPI	L mm	IC inch	EXTERNAL Part Number	X mm	Y mm	INTERNAL Part Number	X mm	Y mm
32	11	1/4				11IR_32UNJ_FC	0,6	0,6
32	16	3/8	16ER_32UNJ_FC	0,6	0,6	16IR_32UNJ_FC	0,6	0,6
28	11	1/4				11IR_28UNJ_FC	0,6	0,7
28	16	3/8	16ER_28UNJ_FC	0,6	0,7	16IR_28UNJ_FC	0,6	0,7
24	11	1/4				11IR_24UNJ_FC	0,7	0,8
24	16	3/8	16ER_24UNJ_FC	0,7	0,8			
20	11	1/4				11IR_20UNJ_FC	0,8	0,9
20	16	3/8	16ER_20UNJ_FC	0,8	0,9	16IR_20UNJ_FC	0,8	0,9
18	11	1/4				11IR_18UNJ_FC	0,8	1,0
18	16	3/8	16ER_18UNJ_FC	0,8	1,0			
16	11	1/4				11IR_16UNJ_FC	0,9	1,1
16	16	3/8	16ER_16UNJ_FC	0,9	1,1	16IR_16UNJ_FC	0,9	1,1
14	16	3/8	16ER_14UNJ_FC	1,0	1,2	16IR_14UNJ_FC	0,9	1,2
13	16	3/8	16ER_13UNJ_FC	1,0	1,3			
12	16	3/8	16ER_12UNJ_FC	1,1	1,4	16IR_12UNJ_FC	1,1	1,4
11	16	3/8	16ER_11UNJ_FC	1,1	1,5			
10	16	3/8	16ER_10UNJ_FC	1,1	1,5	16IR_10UNJ_FC	1,1	1,5
9	16	3/8	16ER_9UNJ_FC	1,2	1,7	16IR_9UNJ_FC	1,2	1,7
8	16	3/8	16ER_8UNJ_FC	1,2	1,6	16IR_8UNJ_FC	1,1	1,5

THREAD TURNING INSERTS

Kit with Different Inserts



External Thread Turning Inserts

Part Number 10X16ER_FC		
1 st. 16ER_0.75ISO_FC	M4,5	MF6-12
1 st. 16ER_1.0ISO_FC	M6-7	MF8-30
1 st. 16ER_1.25ISO_FC	M8-9	MF10-12
1 st. 16ER_1.5ISO_FC	M10-11	MF12-60
1 st. 16ER_1.75ISO_FC	M12	
1 st. 16ER_2.0ISO_FC		M14-16 MF18-100
1 st. 16ER_2.5ISO_FC		M18-22
1 st. 16ER_3.0ISO_FC		M24-27 MF30-100
1 st. 16ER_AG55_FC		P0,5-3,0
1 st. 16ER_AG60_FC		P0,5-3,0

Part Number 10X22ER_FC		
2 st. 22ER_3.5ISO_FC	M30-33	
2 st. 22ER_4.0ISO_FC	M36-39	MF42-100
2 st. 22ER_4.5ISO_FC	M42-45	
2 st. 22ER_5.0ISO_FC	M48-52	
2 st. 22ER_N60_FC	P3,5-5,0	

Internal Thread Turning Inserts

Part Number 10X06IR_Ø5_BC		
2 st. 06IR_0.5ISO_BC		MF8
2 st. 06IR_0.75ISO_BC		MF7-12
2 st. 06IR_1.0ISO_BC	M7	MF8-30
2 st. 06IR_1.25ISO_BC	M8-9	MF10-12
2 st. 06IR_A60_BC	P0,5-1,25	

Part Number 10X08IR_Ø7_BC		
2 st. 08IR_1.0ISO_BC		MF10-30
2 st. 08IR_1.5ISO_BC	M10-11	MF12-60
2 st. 08IR_1.75ISO_BC	M12	
2 st. 08IR_28W_BC		G1/8
2 st. 08IR_A60_BC	P0,5-1,5	

Part Number 10X11IR_Ø10_FC		
2 st. 11IR_1.0ISO_FC		MF14-30
2 st. 11IR_1.5ISO_FC		MF14-60
2 st. 11IR_2.0ISO_FC	M14-16	MF18-100
2 st. 11IR_19W_FC		G1/4-3/8
2 st. 11IR_A60_FC	P0,5-1,5	

■ Recommended holder: SIR_0005_H06

■ Recommended holder: SIR_0007_K08

■ Recommended holder: SIR_0010_K11

Part Number 10X16IR_Ø13_FC		
2 st. 16IR_1.5ISO_FC		MF18-60
2 st. 16IR_2.0ISO_FC		MF18-100
2 st. 16IR_2.5ISO_FC	M18-22	
2 st. 16IR_3.0ISO_FC	M24-27	MF30-100
2 st. 16IR_14W_FC	G1/2-7/8	

Part Number 10X16IR_Ø20_FC		
2 st. 16IR_1.5ISO_FC		MF27-60
2 st. 16IR_2.0ISO_FC		MF27-100
2 st. 16IR_3.0ISO_FC	M27	MF30-100
2 st. 16IR_11W_FC		G1-6
2 st. 16IR_AG60_FC	P0,5-3,0	

Part Number 10X22IR_Ø25_FC		
2 st. 22IR_3.5ISO_FC	M30-33	
2 st. 22IR_4.0ISO_FC	M36-39	MF42-100
2 st. 22IR_4.5ISO_FC	M42-45	
2 st. 22IR_5.0ISO_FC	M48-52	
2 st. 22IR_N60_FC	P3,5-5,0	


■ Recommended holder: SIR_0013_M16

■ Recommended holder: SIR_0020_P16

■ Recommended holder: SIR_0025_R22

U-TOOLHOLDERS

external

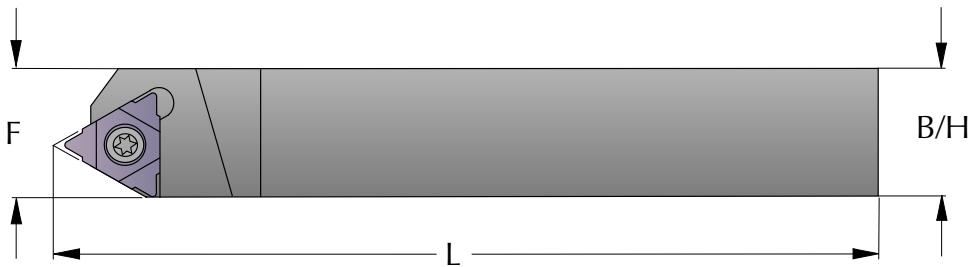

Insert mm	Part Number	B/H mm	L mm	F mm
22	SER_2525_M22U	25	150	28
22	SER_3232_P22U	32	170	32
22	SER_4040_R22U	40	200	40
27	SER_2525_M27U	25	150	32
27	SER_3232_P27U	32	170	32
27	SER_4040_R27U	40	200	40
33	SER_2525_M33U	25	150	32
33	SER_3232_P33U	32	170	32


Spare Parts

Insert mm	Screw to insert	Torx key	Screw to anvil	Anvil
22	S22	K22	A22	AE22U...
27	S27	K27	A27	AE27U...
33	S33	K33		

The Part Numbers are for Right Hand Toolholders. For Left Hand specify L instead of R. Give Helix Angle for Anvil, ex. AE22U+0.5

U-TOOLHOLDERS

internal

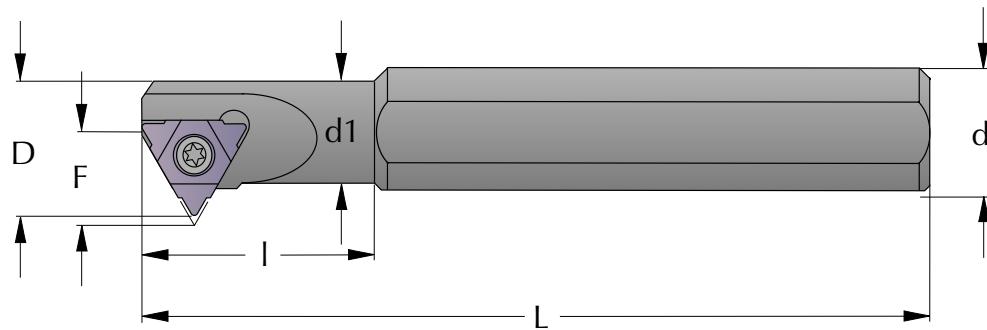

Insert mm	D mm	Part Number	d mm	d1 mm	I mm	L mm	F mm
8	9	SIR_0008_K08U*	16	7,3	21	125	6,6
22	38	SIR_0032_S22U	32	32	-	250	24,4
22	46	SIR_0040_T22U	40	40	-	300	28,1
27	40	SIR_0032_S27U	32	32	-	250	25,8
27	48	SIR_0040_T27U	40	40	-	300	29,4
27	58	SIR_0050_U27U	50	50	-	350	34,3
27	68	SIR_0060_V27U	60	60	-	400	39,7
33	62	SIR_0050_U33U	50	50	-	350	37,5

with Carbide Shank and Internal Coolant


Insert mm	D mm	Part Number	d mm	d1 mm	I mm	L mm	F mm
8	9	SIR_0008_K08UCB*	8	7,3	35	125	6,6

Spare Parts

Insert mm	Screw to insert	Torx key	Screw to anvil	Anvil
08	S8	K8		
22	S22	K22	A22	AI22U...
27	S27	K27	A27	AI27U...
33	S33	K33		

*Toolholder without anvil

U-THREAD TURNING INSERTS

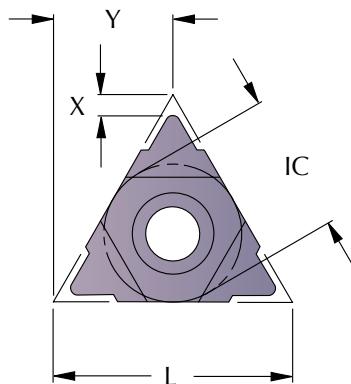

M

METRIC

Pitch mm	L mm	IC inch	EXTERNAL Part Number	X mm	Y mm	INTERNAL Part Number	X mm	Y mm
2,0	8	3/16				08UI_2.0ISO_BC	0,9	4,0
5,5	22	1/2	22UE_5.5ISO_FC	2,3	11,0	22UI_5.5ISO_FC	2,4	11,0
6,0	22	1/2	22UE_6.0ISO_FC	2,6	11,0	22UI_6.0ISO_FC	2,1	11,0
8,0	27	5/8	27UE_8.0ISO_FC	2,4	13,7	27UI_8.0ISO_FC	2,4	13,7
12,0	33	3/4	33UE_12.0ISO_FC	2,5	16,5	33UI_12.0ISO_FC	3,5	16,9

UN

UNIFIED

Pitch TPI	L mm	IC inch	EXTERNAL Part Number	X mm	Y mm	INTERNAL Part Number	X mm	Y mm
13	8	3/16				08UI_13UN_BC	1,0	4,0
12	8	3/16				08UI_12UN_BC	0,9	4,0
11	8	3/16				08UI_11UN_BC	0,9	4,0
4,5	22	1/2	22UE_4.5UN_FC	2,0	11,0	22UI_4.5UN_FC	2,4	11,0
4	22	1/2	22UE_4UN_FC	2,0	11,0	22UI_4UN_FC	2,4	11,0
3	27	5/8	27UE_3UN_FC	2,5	13,7	27UI_3UN_FC	2,7	13,7
2	33	3/4	33UE_2UN_FC	2,8	16,5	33UI_2UN_FC	3,6	16,9

TR

TRAPEZ DIN 103

Pitch mm	L mm	IC inch	EXTERNAL Part Number	X mm	Y mm	INTERNAL Part Number	X mm	Y mm
2,0	8					08UI_2.0TR_BC	0,9	4,0
6,0	22	1/2	22UE_6.0TR_FC	2,0	11,0	22UI_6.0TR_FC	2,0	11,0
7,0	22	1/2	22UE_7.0TR_FC	2,3	11,0	22UI_7.0TR_FC	2,3	11,0
8,0	22	1/2	22UE_8.0TR_FC	2,5	11,0	22UI_8.0TR_FC	2,5	11,0
8,0	27	5/8	27UE_8.0TR_FC	2,5	13,7	27UI_8.0TR_FC	2,5	13,7
9,0	27	5/8	27UE_9.0TR_FC	3,0	13,7	27UI_9.0TR_FC	3,0	13,7
10,0	27	5/8	27UE_10.0TR_FC*	3,2	13,7	27UI_10.0TR_FC*	3,2	13,7
12,0	33	3/4	33UE_12.0TR_FC	3,9	16,9	33UI_12.0TR_FC	3,9	16,9

*Only one cutting edge

U-THREAD TURNING INSERTS



ACME

ACME

Pitch TPI	L mm	IC inch	EXTERNAL Part Number	X mm	Y mm	INTERNAL Part Number	X mm	Y mm
14	8	3/16				08UI_14ACME_BC	0,8	4,0
12	8	3/16				08UI_12ACME_BC	0,8	4,0
10	8	3/16				08UI_10ACME_BC	0,8	4,0
4	22	1/2	22UE_4ACME_FC	2,3	11,0	22UI_4ACME_FC	2,3	11,0
3	27	5/8	27UE_3ACME_FC	2,8	13,7	27UI_3ACME_FC	2,8	13,7
2	33	3/4	33UE_2ACME_FC	4,3	16,9	33UI_2ACME_FC	4,3	16,9

STACME


STUB ACME

Pitch TPI	L mm	IC inch	EXTERNAL Part Number	X mm	Y mm	INTERNAL Part Number	X mm	Y mm
14	8	3/16				08UI_14STACME_BC	0,8	4,0
12	8	3/16				08UI_12STACME_BC	0,9	4,0
10	8	3/16				08UI_10STACME_BC	1,0	4,0
4	22	1/2	22UE_4STACME_FC	2,5	11,0	22UI_4STACME_FC	2,5	11,0
3	22	1/2	22UE_3STACME_FC	3,3	11,0	22UI_3STACME_FC	3,3	11,0
2	33	3/4	33UE_2STACME_FC	5,0	16,9	33UI_2STACME_FC	5,0	16,9



THREAD TURNING TOOLHOLDERS

Micro

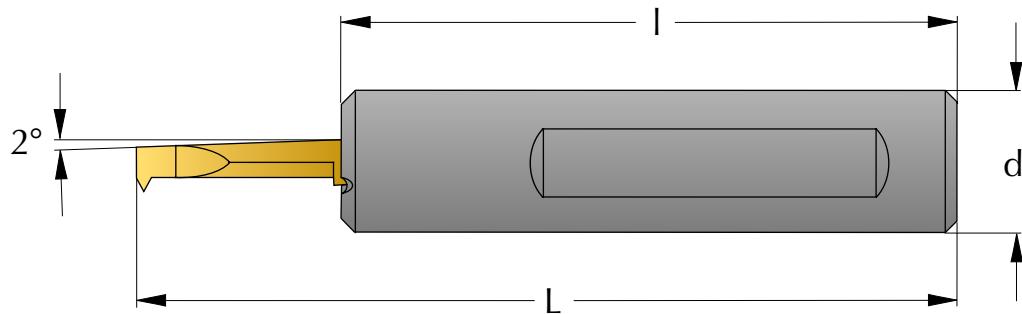

Insert mm	Part Number	d mm	l mm	L mm
3,0	WRC3N_0012E-2	12	70	82
3,0	WRC3N_0016F-2	16	80	92
3,0	WRC3N_0020H-2	20	100	112
3,0	WRC3N_0022J-2	22	110	122
3,0	WRC3N_0025J-2	25	110	122
4,0	WRC4N_0012E-2	12	70	86,5
4,0	WRC4N_0016F-2	16	80	96,5
4,0	WRC4N_0020H-2	20	100	116,5
4,0	WRC4N_0022J-2	22	110	126,5
4,0	WRC4N_0025J-2	25	110	126,5
5,0	WRC5N_0016F-2	16	80	101
5,0	WRC5N_0020H-2	20	100	121
5,0	WRC5N_0022J-2	22	110	131
5,0	WRC5N_0025J-2	25	110	131
6,0	WRC6N_0016F-2	16	80	106
6,0	WRC6N_0020H-2	20	100	126
6,0	WRC6N_0022J-2	22	110	136
6,0	WRC6N_0025J-2	25	110	136
8,0	WRC8N_0020H-2	20	100	145
8,0	WRC8N_0022J-2	22	110	155
8,0	WRC8N_0025J-2	25	110	155


Also available in other types of Toolholder



THREAD TURNING INSERTS



Micro

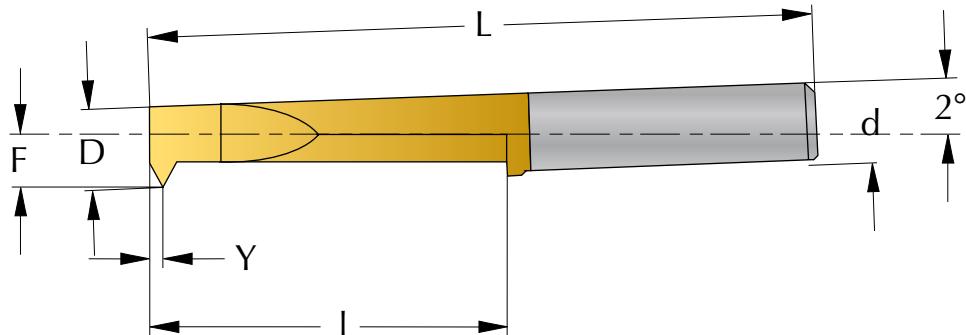

60°

PARTIAL PROFILE 60°

Pitch mm	TPI	D mm	INTERNAL Part Number	d mm	I mm	L mm	F mm	Y mm
0,2-0,4	80 - 64	0,8	WR308_P60_BC	3	4	24	0,5	0,2
0,2-0,6	80 - 44	1,6	WR316_P60_BC	3	7	24	0,75	0,3
0,2-0,8	80 - 32	2,2	WR322_P60_BC	3	10	24	1,25	0,4
0,2-1,0	80 - 28	3,0	WR330_P60_BC	3	12	24	1,5	0,5
0,25-1,25	80 - 20	4,0	WR440_P60_BC	4	16,5	32	2	0,6
0,25-1,5	80 - 18	5,0	WR550_P60_BC	5	21	40	2,5	0,7
0,25-1,75	80 - 14	6,0	WR660_P60_BC	6	27	48	3	0,8
0,35-2,5	72 - 10	8,0	WR880_P60_BC	8	45	72	4	1,2

55°

PARTIAL PROFILE 55°

Pitch mm	TPI	D mm	INTERNAL Part Number	d mm	I mm	L mm	F mm	Y mm
0,25-1,25	80 - 20	4,0	WR440_P55_BC	4	16,5	32	2	0,6
0,25-1,75	80 - 18	6,0	WR660_P55_BC	6	27	48	3	0,8

Also available for Grooving and Turning

Minimum Bore Diameter

To obtain highest possible stability the threading inserts are ground in an angle of 2°. Therefore the minimum bore diameter is dependent on the thread length according to the table below.

D mm	Thread Length (mm)															
	2	4	6	8	10	12	14	16	18	21	24	27	30	35	40	45
0,8	0,87	0,94														
1,6	1,67	1,74	1,81													
2,2	2,27	2,34	2,41	2,48	2,55											
3,0	3,07	3,14	3,21	3,28	3,35	3,42										
4,0	4,07	4,14	4,21	4,28	4,35	4,42	4,49	4,56								
5,0	5,07	5,14	5,21	5,28	5,35	5,42	5,49	5,56	5,63	5,74						
6,0	6,07	6,14	6,21	6,28	6,35	6,42	6,49	6,56	6,63	6,74	6,84	6,95				
8,0	8,07	8,14	8,21	8,28	8,35	8,42	8,49	8,56	8,63	8,74	8,84	8,95	9,05	9,23	9,40	9,58


Minimum Bore Diameter = D + (thread length x 0,035)

SOLID CARBIDE END MILLS



CONTENTS

Technical Information


52

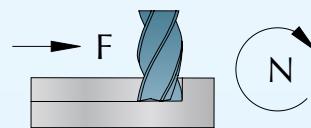

SOLID CARBIDE END MILLS


LC	M	Two Flute	62	
LC	M	Three Flute	63	
LC	M	Four Flute	64	
LC	R	Two Flute, with Ball Nose	65	
LC	MZ	Variable Flute 35° and 38°	66	
LC	MV	Slot Side End Mill	67	
LC	FW	Wave formed Roughing End Mill, Three Flute	68	
LC	FW	Wave formed Roughing End Mill, Four Flute	69	
MG	MA	Two Flute, for aluminium	70	
MG	MA	Three Flute, for aluminium	71	
MG	FWA	Wave formed Roughing End Mill, aluminium	72	
FC	M	Two Flute	73	
FC	M	Three Flute	74	
FC	M	Four Flute	75	
FC	M..R	Two Flute, with Corner Radius	76	
FC	M..R	Four Flute, with Corner Radius	77	
FC	R	Two Flute, with Ball Nose	78	
FC	R..L	Two Flute, with Ball Nose, Long Shank	78	
FC	R	Four Flute, with Ball Nose	79	

FC	U	High Helix	80
FC	V	High Helix, for Hard Materials	81

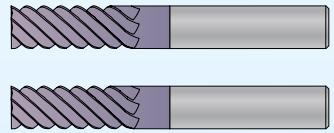


MOLD AND DIE END MILLS

FC	MP	Micro, Two Flute	82
FC	RP	Micro, Two Flute, with Ball Nose	84
FC	MH	Two Flute, with Corner Radius	86
FC	MH	Four Flute, with Corner Radius	87
FC	RH	Two Flute, with Ball Nose	88
FC	RH	Four Flute, with Ball Nose	89
FC	BH	Two Flute, with 220° Ball Nose	90
FC	TH	Roughing End Mill	91

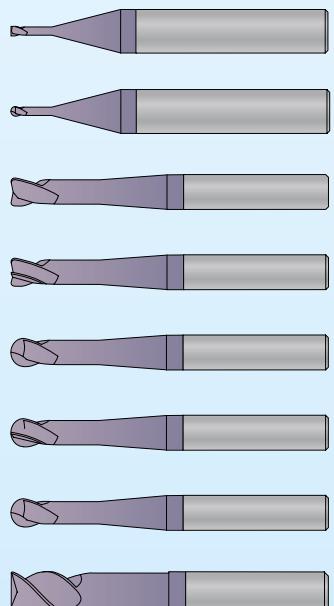

DIAMOND COATED END MILLS

DC	MG	Micro, Two Flute	92
DC	RG	Micro, Two Flute, with Ball Nose	93
DC	MG	Three Flute, with Corner Radius	94
DC	MG..L	Two Flute, with Corner Radius, Long Shank	94
DC	MG	Two/Four Flute, with Corner Radius	95
DC	RG	Three Flute, with Ball Nose	96
DC	RG..L	Two Flute, with Ball Nose, Long Shank	96
DC	RG	Two/Four Flute, with Ball Nose	97

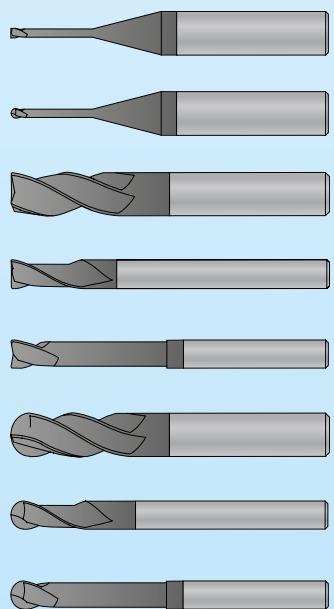

Cutting Speed (V_c) and Material Factor (F_m)

MATERIAL		Hardness HB	Tensile Strength N/mm ²	Cutting Speed (V_c) m/min	Material Factor (F_m)
Steel	Low carbon, C < 0,25%	< 120	< 400	150 - 200	1,2
	Medium carbon, C < 0,55%	< 200	< 700	120 - 170	1,1
	High carbon, C < 0,85%	< 250	< 850	110 - 150	1,0
	Low alloy	< 250	< 850	100 - 140	1,0
	High alloy	< 350	< 1200	70 - 110	0,9
	Hardened, HRC < 45			60 - 100	0,8
	Hardened, HRC < 55			30 - 60	0,7
	Hardened, HRC < 65			20 - 40	0,6
	Lamellar graphite	< 150	< 500	130 - 180	1,2
	Lamellar graphite	< 300	< 1000	100 - 150	1,1
Cast iron	Nodular graphite, malleable	< 200	< 700	100 - 150	1,0
	Nodular graphite, malleable	< 300	< 1000	80 - 120	0,9
	Free machining	< 250	< 850	130 - 180	1,0
	Austenitic	< 250	< 850	90 - 140	0,9
Stainless steel	Ferritic and austenitic	< 300	< 1000	80 - 120	0,8
	Unalloyed	< 200	< 700	60 - 80	0,8
	Alloyed	< 270	< 900	50 - 70	0,7
Titanium	Alloyed	< 350	< 1250	30 - 50	0,6
	Unalloyed	< 150	< 500	80 - 120	0,8
	Alloyed	< 270	< 900	60 - 80	0,7
Nickel	Alloyed	< 350	< 1250	50 - 70	0,6
	Unalloyed	< 150	< 500	80 - 120	0,8
	Alloyed	< 270	< 900	60 - 80	0,7
Copper	Unalloyed	< 100	< 350	150 - 250	1,0
	Brass, bronze	< 200	< 700	130 - 180	1,0
	High strength bronze	< 470	< 1500	60 - 80	0,8
Aluminium	Unalloyed	< 100	< 350	500 - 900	1,4
	Alloyed, Si < 0,5%	< 150	< 500	400 - 800	1,3
	Alloyed, Si < 10%	< 120	< 400	300 - 500	1,2
	Alloyed, Si > 10%	< 120	< 400	200 - 400	1,1
Inconel	718	< 370		50 - 70	0,6
Graphite				300 - 500	1,0

Code Key

M
10
10
B
22
R05
FC

type of end mill

cutter diameter

cutting lenght

carbide grade

shank dimension

cutting edges


corner radius

B = two flute
C = three flute
D = four flute
F = six flute

Engagement Factor (F_e)


	$a_e = 0,1 \times D$	$a_e = 0,25 \times D$	$a_e = 0,5 \times D$	$a_e = 0,75 \times D$	Slot Milling $a_e = 1,0 \times D$
$a_p = 0,25 \times D$	3,5	1,8	1,4	1,2	1,0
$a_p = 0,5 \times D$	3,0	1,5	1,2	0,9	0,7
$a_p = 0,75 \times D$	2,5	1,3	1,0	0,7	0,6
$a_p = 1,0 \times D$	2,0	1,1	0,8	0,6	0,5
$a_p = 1,25 \times D$	1,7	0,9	0,6		
$a_p = 1,5 \times D$	1,4	0,7			
$a_p = 2,0 \times D$	1,2	0,5			
$a_p = 2,5 \times D$	1,0				
$a_p = 3,0 \times D$	0,8				

Side Milling



$$F_z = F_m \times F_e \times F_d$$

Slot Milling



Diameter Factor (F_d)

D	Diameter Factor (F_d)
0,5	0,004
1,0	0,006
2,0	0,009
3,0	0,012
4,0	0,016
5,0	0,022
6,0	0,032
8,0	0,045
10,0	0,056
12,0	0,074
14,0	0,086
16,0	0,098
18,0	0,110
20,0	0,122
25,0	0,135
32,0	0,145
40,0	0,155

$$n = \frac{V_c \times 1000}{\pi \times D}$$

$$V_f = F_z \times z \times n$$

Example

Side Milling with M1010D25 LC
Standard Length Four Flute End Mill
Carbon Steel, up to 700 N/mm²
 $D = 10 \text{ mm}$
 $a_p = 1,0 \times D = 10 \text{ mm}$
 $a_e = 0,25 \times D = 2,5 \text{ mm}$
 $F_z = 1,1 \times 1,1 \times 0,056 = 0,068 \text{ mm/flute}$
 $n = (130 \times 1000) / (\pi \times 10) = 4138 \text{ rpm}$
 $V_f = 0,068 \times 4 \times 4138 = 1126 \text{ mm/min}$

Carbide Grades



Super Micrograin Carbide with AlCrN coating.
Allround Grade with extremely high heat resistance. Use cutting data according to the tables.



Uncoated Super Micrograin Carbide.
For Aluminium. Use cutting data according to the tables.




Micrograin Carbide with TiAlN coating.
Allround Grade with high heat resistance. Use cutting data according to the tables.



Micrograin Carbide with Diamond coating.
For Graphite. Use cutting data according to the tables.

SLOT MILLING



$$a_e = 1,0 \times D$$

$$a_p = 0,5 \times D$$

Carbon Steel, up to 700 N/mm²

D mm	z mm	a _e mm	a _p mm	V _c m/min	n rpm	F _z mm/z	V _f mm/min
0,5	2	0,50	0,25	130	82 761	0,003	510
1,0	2	1,00	0,50	130	41 380	0,005	382
	3	1,00	0,50	130	41 380	0,005	574
1,5	2	1,50	0,75	130	27 587	0,006	319
	3	1,50	0,75	130	27 587	0,006	478
2,0	2	2,00	1,00	130	20 690	0,007	287
	3	2,00	1,00	130	20 690	0,007	430
2,5	2	2,50	1,25	130	16 552	0,008	268
	3	2,50	1,25	130	16 552	0,008	401
3,0	2	3,00	1,50	130	13 793	0,009	255
	3	3,00	1,50	130	13 793	0,009	382
4,0	2	4,00	2,00	130	10 345	0,012	255
	3	4,00	2,00	130	10 345	0,012	382
5,0	2	5,00	2,50	130	8 276	0,017	280
	3	5,00	2,50	130	8 276	0,017	421
6,0	2	6,00	3,00	130	6 897	0,025	340
	3	6,00	3,00	130	6 897	0,025	510
8,0	2	8,00	4,00	130	5 173	0,035	358
	3	8,00	4,00	130	5 173	0,035	538
10,0	2	10,00	5,00	130	4 138	0,043	357
	3	10,00	5,00	130	4 138	0,043	535
12,0	2	12,00	6,00	130	3 448	0,057	393
	3	12,00	6,00	130	3 448	0,057	589
14,0	2	14,00	7,00	130	2 956	0,066	391
	3	14,00	7,00	130	2 956	0,066	587
16,0	2	16,00	8,00	130	2 586	0,075	390
	3	16,00	8,00	130	2 586	0,075	585
18,0	2	18,00	9,00	130	2 299	0,085	389
	3	18,00	9,00	130	2 299	0,085	584
20,0	2	20,00	10,00	130	2 069	0,094	389
	3	20,00	10,00	130	2 069	0,094	583
25,0	2	25,00	12,50	130	1 655	0,104	344
	3	25,00	12,50	130	1 655	0,104	516

High Alloy Steel / Hardened Steel HRC 30-45

D mm	z mm	a _e mm	a _p mm	V _c m/min	n rpm	F _z mm/z	V _f mm/min
0,5	2	0,50	0,25	70	44 563	0,002	200
1,0	2	1,00	0,50	70	22 282	0,003	150
	3	1,00	0,50	70	22 282	0,003	225
1,5	2	1,50	0,75	70	14 854	0,004	125
	3	1,50	0,75	70	14 854	0,004	187
2,0	2	2,00	1,00	70	11 141	0,005	112
	3	2,00	1,00	70	11 141	0,005	168
2,5	2	2,50	1,25	70	8 913	0,006	105
	3	2,50	1,25	70	8 913	0,006	157
3,0	2	3,00	1,50	70	7 427	0,007	100
	3	3,00	1,50	70	7 427	0,007	150
4,0	2	4,00	2,00	70	5 570	0,009	100
	3	4,00	2,00	70	5 570	0,009	150
5,0	2	5,00	2,50	70	4 456	0,012	110
	3	5,00	2,50	70	4 456	0,012	165
6,0	2	6,00	3,00	70	3 714	0,018	133
	3	6,00	3,00	70	3 714	0,018	200
8,0	2	8,00	4,00	70	2 785	0,025	140
	3	8,00	4,00	70	2 785	0,025	211
10,0	2	10,00	5,00	70	2 228	0,031	140
	3	10,00	5,00	70	2 228	0,031	210
12,0	2	12,00	6,00	70	1 857	0,041	154
	3	12,00	6,00	70	1 857	0,041	231
14,0	2	14,00	7,00	70	1 592	0,048	153
	3	14,00	7,00	70	1 592	0,048	230
16,0	2	16,00	8,00	70	1 393	0,055	153
	3	16,00	8,00	70	1 393	0,055	229
18,0	2	18,00	9,00	70	1 238	0,062	153
	3	18,00	9,00	70	1 238	0,062	229
20,0	2	20,00	10,00	70	1 114	0,068	152
	3	20,00	10,00	70	1 114	0,068	228
25,0	2	25,00	12,50	70	891	0,076	135
	3	25,00	12,50	70	891	0,076	202

Two Flute

LC
AlCrN coated
Super Micrograin Carbide

Tolerance

D 1,0 - 6,0 +0 / -0,025

D 8,0 - 12,0 +0 / -0,030

Shank


Cylindrical h6, DIN6535 HA

Flute

35° right hand spiral, center cutting

Field of application

All types of steel up to HRC55

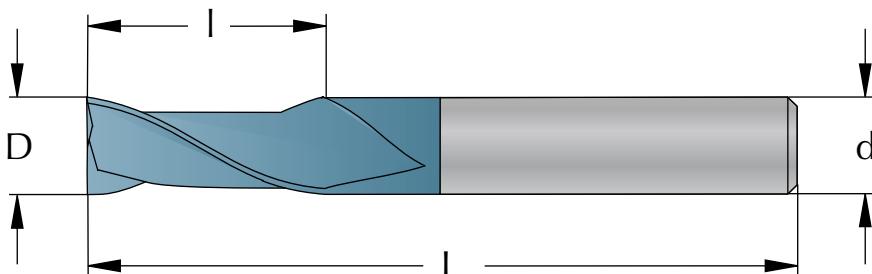

D mm	d mm	Part Number	l mm	L mm	Cutting edges
1,0	4	M0401B3_LC	3	50	2
1,5	4	M04015B4_LC	4	50	2
2,0	4	M0402B6_LC	6	50	2
2,5	4	M04025B8_LC	8	50	2
3,0	4	M0403B8_LC	8	50	2
3,0	6	M0603B8_LC	8	57	2
4,0	4	M0404B11_LC	11	50	2
4,0	6	M0604B11_LC	11	57	2
5,0	6	M0605B13_LC	13	57	2
6,0	6	M0606B16_LC	16	57	2
8,0	8	M0808B20_LC	20	63	2
10,0	10	M1010B25_LC	25	72	2
12,0	12	M1212B30_LC	30	83	2



Three Flute


LC
AlCrN coated
Super Micrograin Carbide

Tolerance
D 1,0 - 6,0 +0 / -0,025
D 8,0 - 12,0 +0 / -0,030

Shank
Cylindrical h6, DIN6535 HA

Flute
35° right hand spiral, center cutting

Field of application
All types of steel up to HRC55

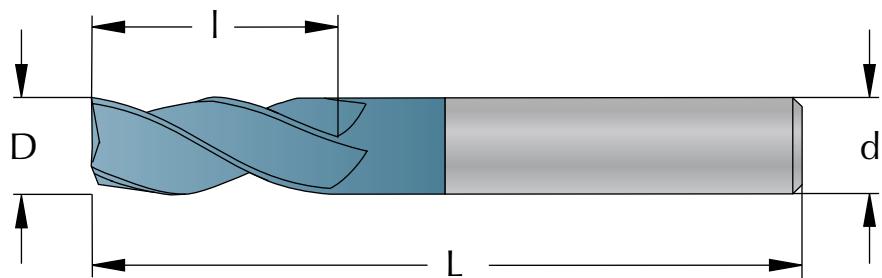

D mm	d mm	Part Number	l mm	L mm	Cutting edges
1,0	4	M0401C3_LC	3	50	3
1,5	4	M04015C4_LC	4	50	3
2,0	4	M0402C6_LC	6	50	3
2,5	4	M04025C8_LC	8	50	3
3,0	4	M0403C8_LC	8	50	3
3,0	6	M0603C8_LC	8	57	3
4,0	4	M0404C11_LC	11	50	3
4,0	6	M0604C11_LC	11	57	3
5,0	6	M0605C13_LC	13	57	3
6,0	6	M0606C16_LC	16	57	3
8,0	8	M0808C20_LC	20	63	3
10,0	10	M1010C25_LC	25	72	3
12,0	12	M1212C30_LC	30	83	3



Four Flute

LC
AlCrN coated
Super Micrograin Carbide

Tolerance

D 1,0 - 6,0 +0 / -0,025

D 8,0 - 12,0 +0 / -0,030

Shank


Cylindrical h6, DIN6535 HA

Flute

35° right hand spiral, center cutting

Field of application

All types of steel up to HRC55

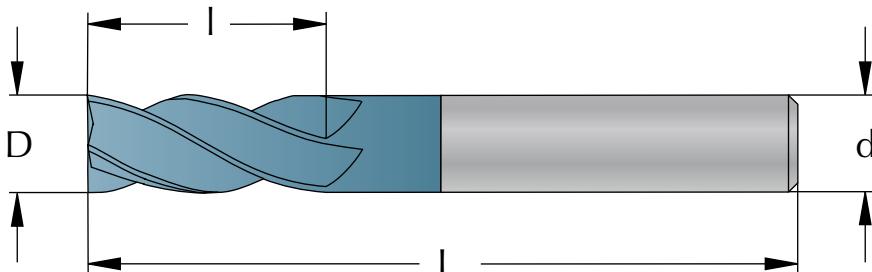

D mm	d mm	Part Number	l mm	L mm	Cutting edges
2,0	4	M0402D6_LC	6	50	4
3,0	4	M0403D8_LC	8	50	4
3,0	6	M0603D8_LC	8	57	4
4,0	4	M0404D11_LC	11	50	4
4,0	6	M0604D11_LC	11	57	4
5,0	6	M0605D13_LC	13	57	4
6,0	6	M0606D16_LC	16	57	4
8,0	8	M0808D20_LC	20	63	4
10,0	10	M1010D25_LC	25	72	4
12,0	12	M1212D30_LC	30	83	4



LC

AlCrN coated
Super Micrograin Carbide

Tolerance

D 1,0 - 6,0 +0 / -0,025

D 8,0 - 12,0 +0 / -0,030

Shank


Cylindrical h6, DIN6535 HA

Flute

30° right hand spiral, center cutting

Field of application

All types of steel up to HRC55

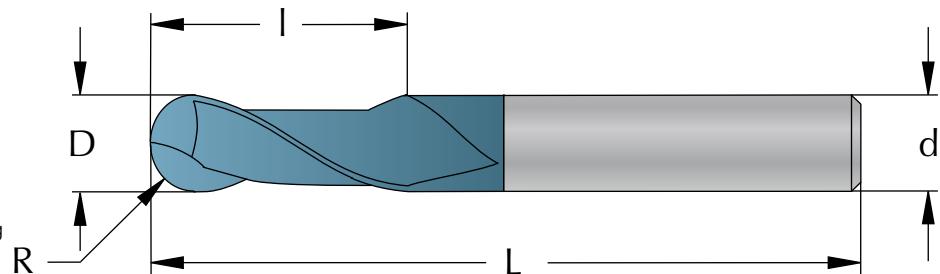


D mm	d mm	R mm	Part Number	I mm	L mm	Cutting edges
1,0	4	0,5	R0401B2_LC	2	50	2
1,5	4	0,75	R04015B3_LC	3	50	2
2,0	4	1,0	R0402B4_LC	4	50	2
2,5	4	1,25	R04025B5_LC	5	50	2
3,0	4	1,5	R0403B6_LC	6	50	2
3,0	6	1,5	R0603B6_LC	6	57	2
4,0	4	2,0	R0404B8_LC	8	50	2
4,0	6	2,0	R0604B8_LC	8	57	2
5,0	6	2,5	R0605B10_LC	10	57	2
6,0	6	3,0	R0606B12_LC	12	57	2
8,0	8	4,0	R0808B16_LC	16	63	2
10,0	10	5,0	R1010B20_LC	20	72	2
12,0	12	6,0	R1212B24_LC	24	83	2



Variable Flute 35° and 38°

LC
 AlCrN coated
 Super Micrograin Carbide
Tolerance
 D 1,0 - 6,0 +0 / -0,025
 D 8,0 - 12,0 +0 / -0,030
Shank
 Cylindrical h6, DIN6535 HA
Flute
 35° and 38° right hand spiral,
 center cutting
Field of application
 All types of steel up to HRC55

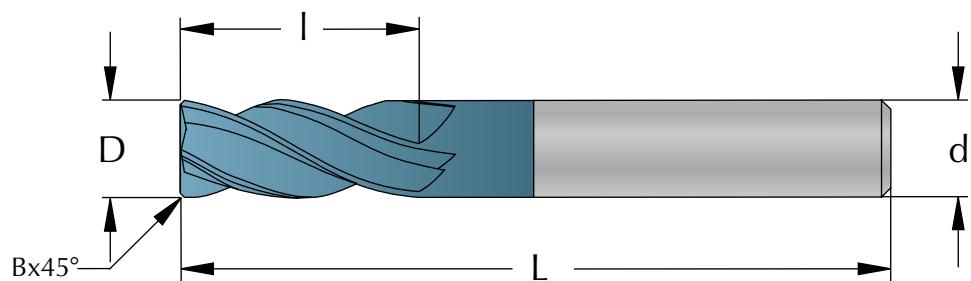

D mm	d mm	B mm	Part Number	I mm	L mm	Cutting edges
6,0	6	0,2	MZ0606D16_LC	16	57	4
8,0	8	0,25	MZ0808D20_LC	20	63	4
10,0	10	0,3	MZ1010D25_LC	25	72	4
12,0	12	0,3	MZ1212D30_LC	30	83	4



Less vibrations with
two different angles


Slot Side End Mill

LC
AlCrN coated
Super Micrograin Carbide


Tolerance
D 1,0 - 6,0 +0 / -0,025
D 8,0 - 12,0 +0 / -0,030

Shank
Cylindrical h6, DIN6535 HA

Flute
50° right hand spiral, center cutting
Field of application
All types of steel up to HRC55

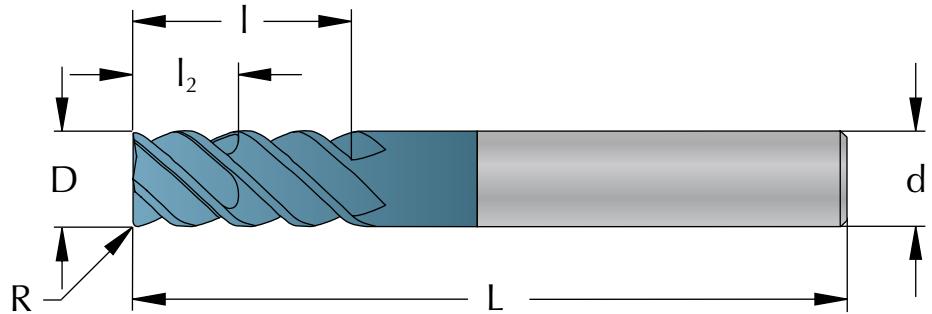


D mm	d mm	R mm	Part Number	l mm	l ₂ mm	L mm	Cutting edges
6,0	6	0,4	MV0606D16_LC	16	6	57	4
8,0	8	0,5	MV0808D20_LC	20	8	63	4
10,0	10	0,6	MV1010D25_LC	25	10	72	4
12,0	12	0,6	MV1212D30_LC	30	12	83	4

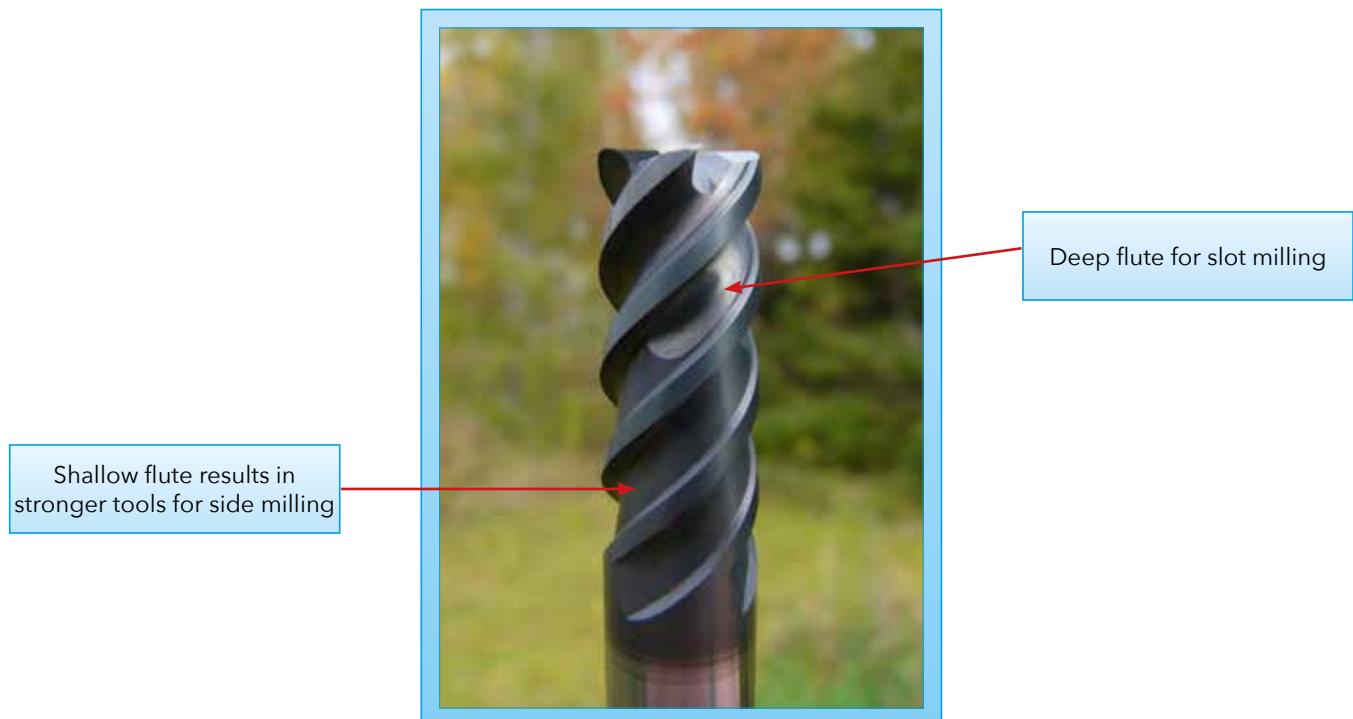

Wave formed, Roughing, Three Flute

LC
 AlCrN coated
 Super Micrograin Carbide
Tolerance
 D 1,0 - 6,0 +0 / -0,025
 D 8,0 - 12,0 +0 / -0,030
Shank
 Cylindrical h6, DIN6535 HA
Flute
 35° right hand spiral, center cutting
Field of application
 All types of steel up to HRC55

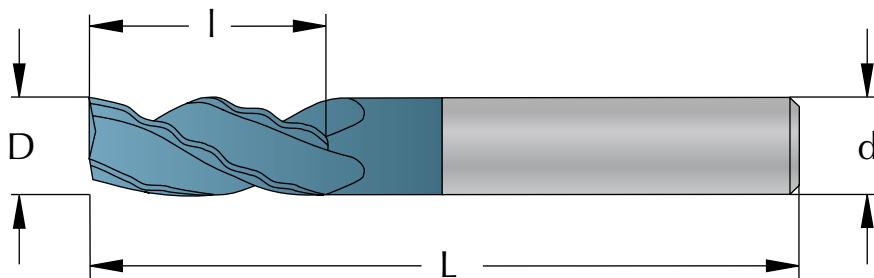

D mm	d mm	Part Number	I mm	L mm	Cutting edges
6,0	6	FW0606C16_LC	16	57	3
8,0	8	FW0808C20_LC	20	63	3
10,0	10	FW1010C25_LC	25	72	3
12,0	12	FW1212C30_LC	30	83	3



LC

AlCrN coated
Super Micrograin Carbide

Tolerance

D 1,0 - 6,0 +0 / -0,025
D 8,0 - 12,0 +0 / -0,030

Shank


Cylindrical h6, DIN6535 HA

Flute

35° right hand spiral, center cutting

Field of application

All types of steel up to HRC55

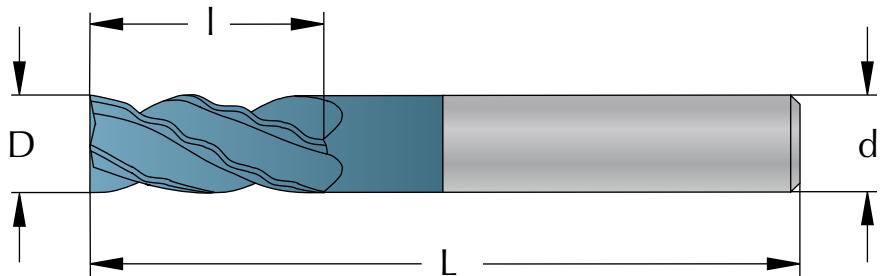

D mm	d mm	Part Number	I mm	L mm	Cutting edges
6,0	6	FW0606D16_LC	16	57	4
8,0	8	FW0808D20_LC	20	63	4
10,0	10	FW1010D25_LC	25	72	4
12,0	12	FW1212D30_LC	30	83	4



Wave formed cutting edge
gives high productivity

Two Flute, for aluminium

MG
Uncoated
Super Micrograin Carbide

Tolerance

D 1,0 - 6,0 +0 / -0,025

D 8,0 - 12,0 +0 / -0,030

Shank


Cylindrical h6, DIN6535 HA

Flute

45° right hand spiral, center cutting

Field of application

Aluminium

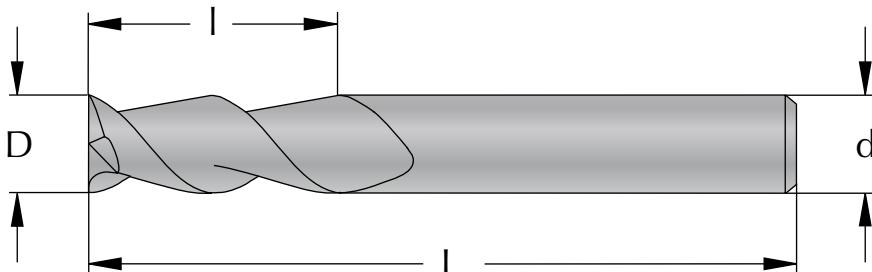

D mm	d mm	Part Number	I mm	L mm	Cutting edges
2,0	6	MA0602B6_MG	6	57	2
3,0	6	MA0603B8_MG	8	57	2
4,0	6	MA0604B11_MG	11	57	2
5,0	6	MA0605B13_MG	13	57	2
6,0	6	MA0606B16_MG	16	57	2
8,0	8	MA0808B20_MG	20	63	2
10,0	10	MA1010B25_MG	25	72	2
12,0	12	MA1212B30_MG	30	83	2



Uncoated

SOLID CARBIDE END MILLS

Three Flute, for aluminium




MG
Uncoated
Super Micrograin Carbide

Tolerance
D 1,0 - 6,0 +0 / -0,025
D 8,0 - 12,0 +0 / -0,030

Shank
Cylindrical h6, DIN6535 HA

Flute
50° right hand spiral, center cutting
Field of application
Aluminium

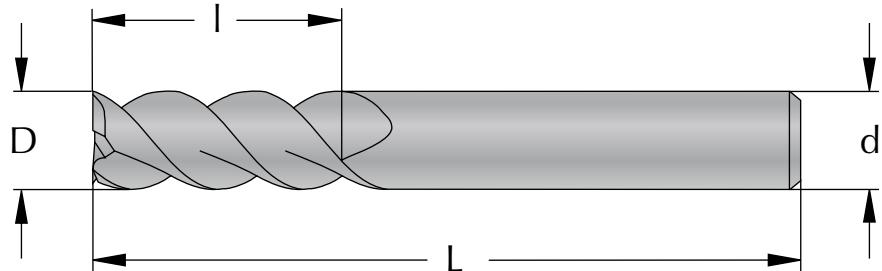

D mm	d mm	Part Number	I mm	L mm	Cutting edges
2,0	6	MA0602C6_MG	6	57	3
3,0	6	MA0603C8_MG	8	57	3
4,0	6	MA0604C11_MG	11	57	3
5,0	6	MA0605C13_MG	13	57	3
6,0	6	MA0606C16_MG	16	57	3
8,0	8	MA0808C20_MG	20	63	3
10,0	10	MA1010C25_MG	25	72	3
12,0	12	MA1212C30_MG	30	83	3



Wave formed, Roughing, for aluminium

MG

Uncoated
Super Micrograin Carbide

Tolerance

D 1,0 - 6,0 +0 / -0,025

D 8,0 - 12,0 +0 / -0,030

Shank


Cylindrical h6, DIN6535 HA

Flute

45° right hand spiral, center cutting

Field of application

Aluminium

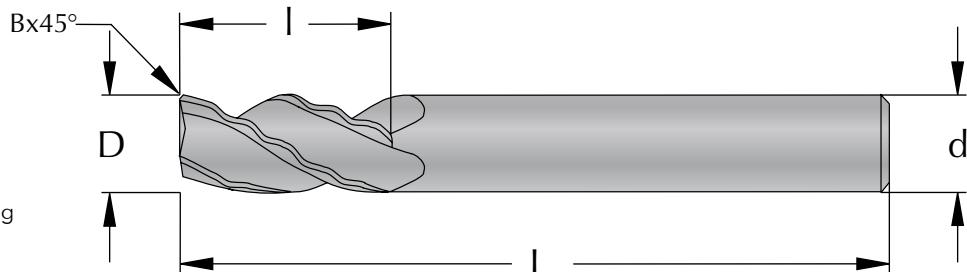

D mm	d mm	B mm	Part Number	I mm	L mm	Cutting edges
6,0	6	0,2	FWA0606C16_MG	16	57	3
8,0	8	0,25	FWA0808C20_MG	20	63	3
10,0	10	0,3	FWA1010C25_MG	25	72	3
12,0	12	0,3	FWA1212C30_MG	30	83	3

Small chamfer gives longer tool life

Deep flute for aluminium

Wave formed cutting edge gives high productivity



Two Flute

FCTiAlN coated
Micrograin Carbide**Tolerance**

D 1,0 - 25,0 +0 / -0,050

Shank


Cylindrical with h6 tolerance

Flute

30° right hand spiral, center cutting

Field of application


All types of steel

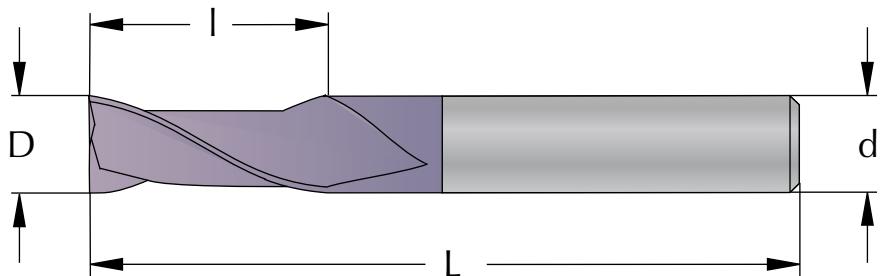

D mm	d mm	Part Number	I mm	L mm	Cutting edges
1,0	3	M0301B3_FC	3	38	2
1,5	3	M03015B5_FC	5	38	2
2,0	3	M0302B6_FC	6	38	2
2,5	3	M03025B7_FC	7	38	2
3,0	3	M0303B12_FC	12	38	2
3,0	3	M0303B25_FC	25	65	2
3,5	4	M04035B12_FC	12	50	2
4,0	4	M0404B14_FC	14	50	2
4,0	4	M0404B25_FC	25	65	2
4,5	5	M05045B14_FC	14	50	2
5,0	5	M0505B16_FC	16	50	2
5,0	5	M0505B25_FC	25	75	2
6,0	6	M0606B19_FC	19	63	2
6,0	6	M0606B25_FC	25	75	2
6,0	6	M0606B38_FC	38	100	2
7,0	8	M0807B19_FC	19	63	2
8,0	8	M0808B19_FC	19	63	2
8,0	8	M0808B25_FC	25	75	2
8,0	8	M0808B38_FC	38	100	2
9,0	10	M1009B22_FC	22	70	2
10,0	10	M1010B22_FC	22	70	2
10,0	10	M1010B38_FC	38	100	2
12,0	12	M1212B25_FC	25	75	2
12,0	12	M1212B50_FC	50	100	2
12,0	12	M1212B75_FC	75	150	2
14,0	14	M1414B30_FC	30	88	2
14,0	14	M1414B75_FC	75	150	2
16,0	16	M1616B32_FC	32	88	2
16,0	16	M1616B75_FC	75	150	2
18,0	18	M1818B36_FC	36	100	2
20,0	20	M2020B38_FC	38	100	2
20,0	20	M2020B75_FC	75	150	2
25,0	25	M2525B38_FC	38	100	2
25,0	25	M2525B75_FC	75	150	2

Three Flute


FC
 TiAlN coated
 Micrograin Carbide
Tolerance
 D 1,0 - 25,0 +0 / -0,050
Shank
 Cylindrical with h6 tolerance
Flute
 30° right hand spiral, center cutting
Field of application
 All types of steel

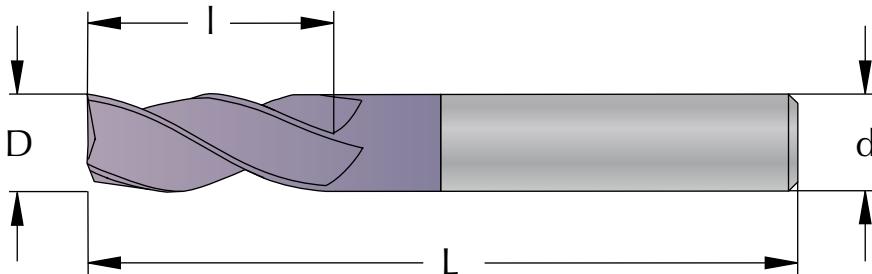

D mm	d mm	Part Number	I mm	L mm	Cutting edges
1,0	3	M0301C3_FC	3	38	3
1,5	3	M03015C5_FC	5	38	3
2,0	3	M0302C6_FC	6	38	3
2,5	3	M03025C7_FC	7	38	3
3,0	3	M0303C12_FC	12	38	3
3,0	3	M0303C25_FC	25	65	3
3,5	4	M04035C12_FC	12	50	3
4,0	4	M0404C14_FC	14	50	3
4,0	4	M0404C25_FC	25	65	3
4,5	5	M05045C14_FC	14	50	3
5,0	5	M0505C16_FC	16	50	3
5,0	5	M0505C25_FC	25	75	3
6,0	6	M0606C19_FC	19	63	3
6,0	6	M0606C25_FC	25	75	3
7,0	8	M0807C19_FC	19	63	3
8,0	8	M0808C19_FC	19	63	3
8,0	8	M0808C25_FC	25	75	3
9,0	10	M1009C22_FC	22	70	3
10,0	10	M1010C22_FC	22	70	3
10,0	10	M1010C38_FC	38	100	3
12,0	12	M1212C25_FC	25	75	3
12,0	12	M1212C50_FC	50	100	3
14,0	14	M1414C30_FC	30	88	3
16,0	16	M1616C32_FC	32	88	3
16,0	16	M1616C75_FC	75	150	3
18,0	18	M1818C36_FC	36	100	3
20,0	20	M2020C38_FC	38	100	3
20,0	20	M2020C75_FC	75	150	3
25,0	25	M2525C38_FC	38	100	3
25,0	25	M2525C75_FC	75	150	3

Four Flute

FC
TiAlN coated
Micrograin Carbide
Tolerance
D 1,0 - 25,0 +0 / -0,050
Shank
Cylindrical with h6 tolerance
Flute
30° right hand spiral, center cutting
Field of application
All types of steel

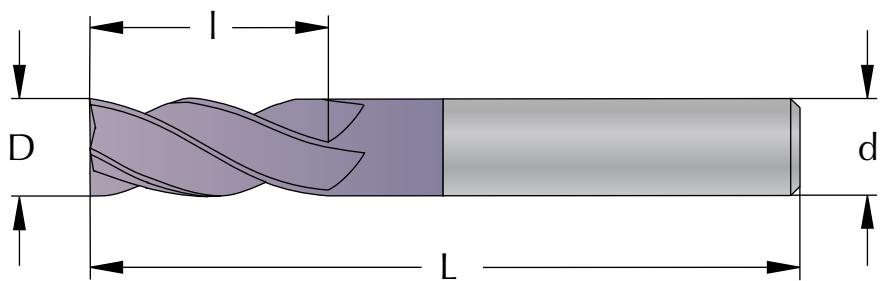

D mm	d mm	Part Number	I mm	L mm	Cutting edges
1,0	3	M0301D3_FC	3	38	4
1,5	3	M03015D5_FC	5	38	4
2,0	3	M0302D6_FC	6	38	4
2,5	3	M03025D7_FC	7	38	4
3,0	3	M0303D12_FC	12	38	4
3,0	3	M0303D25_FC	25	65	4
3,5	4	M04035D12_FC	12	50	4
4,0	4	M0404D14_FC	14	50	4
4,0	4	M0404D25_FC	25	65	4
4,5	5	M05045D14_FC	14	50	4
5,0	5	M0505D16_FC	16	50	4
5,0	5	M0505D25_FC	25	75	4
6,0	6	M0606D19_FC	19	63	4
6,0	6	M0606D25_FC	25	75	4
6,0	6	M0606D38_FC	38	100	4
7,0	8	M0807D19_FC	19	63	4
8,0	8	M0808D19_FC	19	63	4
8,0	8	M0808D25_FC	25	75	4
8,0	8	M0808D38_FC	38	100	4
9,0	10	M1009D22_FC	22	70	4
10,0	10	M1010D22_FC	22	70	4
10,0	10	M1010D38_FC	38	100	4
12,0	12	M1212D25_FC	25	75	4
12,0	12	M1212D50_FC	50	100	4
12,0	12	M1212D75_FC	75	150	4
14,0	14	M1414D30_FC	30	88	4
14,0	14	M1414D75_FC	75	150	4
16,0	16	M1616D32_FC	32	88	4
16,0	16	M1616D75_FC	75	150	4
18,0	18	M1818D36_FC	36	100	4
20,0	20	M2020D38_FC	38	100	4
20,0	20	M2020D75_FC	75	150	4
25,0	25	M2525D38_FC	38	100	4
25,0	25	M2525D75_FC	75	150	4

Two Flute, with Corner Radius


FC
TiAlN coated
Micrograin Carbide

Tolerance
D 4,0 - 20,0 +0 / -0,050

Shank
Cylindrical with h6 tolerance

Flute
30° right hand spiral, center cutting

Field of application
All types of steel

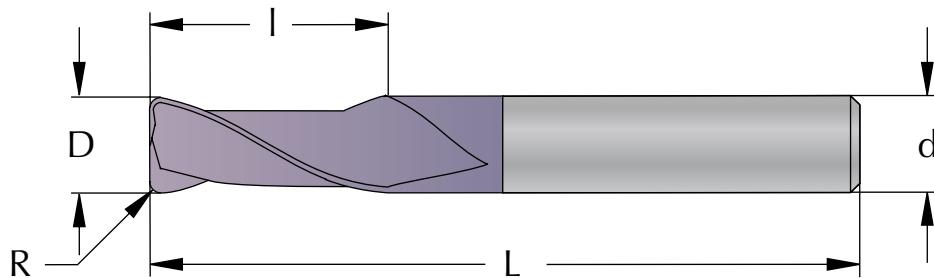

D mm	d mm	R mm	Part Number	I mm	L mm	Cutting edges
4,0	4	0,25	M0404B14R025_FC	14	50	2
4,0	4	0,50	M0404B14R05_FC	14	50	2
4,0	4	0,75	M0404B14R075_FC	14	50	2
4,0	4	1,00	M0404B14R10_FC	14	50	2
6,0	6	0,25	M0606B19R025_FC	19	63	2
6,0	6	0,50	M0606B19R05_FC	19	63	2
6,0	6	0,75	M0606B19R075_FC	19	63	2
6,0	6	1,00	M0606B19R10_FC	19	63	2
6,0	6	1,25	M0606B19R125_FC	19	63	2
6,0	6	1,50	M0606B19R15_FC	19	63	2
8,0	8	0,50	M0808B19R05_FC	19	63	2
8,0	8	0,75	M0808B19R075_FC	19	63	2
8,0	8	1,00	M0808B19R10_FC	19	63	2
8,0	8	1,25	M0808B19R125_FC	19	63	2
8,0	8	1,50	M0808B19R15_FC	19	63	2
8,0	8	2,00	M0808B19R20_FC	19	63	2
10,0	10	0,50	M1010B22R05_FC	22	70	2
10,0	10	0,75	M1010B22R075_FC	22	70	2
10,0	10	1,00	M1010B22R10_FC	22	70	2
10,0	10	1,50	M1010B22R15_FC	22	70	2
10,0	10	2,00	M1010B22R20_FC	22	70	2
10,0	10	3,00	M1010B22R30_FC	22	70	2
12,0	12	0,50	M1212B25R05_FC	25	75	2
12,0	12	0,75	M1212B25R075_FC	25	75	2
12,0	12	1,00	M1212B25R10_FC	25	75	2
12,0	12	1,50	M1212B25R15_FC	25	75	2
12,0	12	2,00	M1212B25R20_FC	25	75	2
12,0	12	3,00	M1212B25R30_FC	25	75	2
16,0	16	0,50	M1616B32R05_FC	32	88	2
16,0	16	0,75	M1616B32R075_FC	32	88	2
16,0	16	1,00	M1616B32R10_FC	32	88	2
16,0	16	1,50	M1616B32R15_FC	32	88	2
16,0	16	2,00	M1616B32R20_FC	32	88	2
16,0	16	3,00	M1616B32R30_FC	32	88	2
20,0	20	0,50	M2020B38R05_FC	38	100	2
20,0	20	0,75	M2020B38R075_FC	38	100	2
20,0	20	1,00	M2020B38R10_FC	38	100	2
20,0	20	1,50	M2020B38R15_FC	38	100	2
20,0	20	2,00	M2020B38R20_FC	38	100	2
20,0	20	3,00	M2020B38R30_FC	38	100	2

Four Flute, with Corner Radius


FC
TiAlN coated
Micrograin Carbide

Tolerance
D 4,0 - 20,0 +0 / -0,050

Shank
Cylindrical with h6 tolerance

Flute
30° right hand spiral, center cutting

Field of application
All types of steel

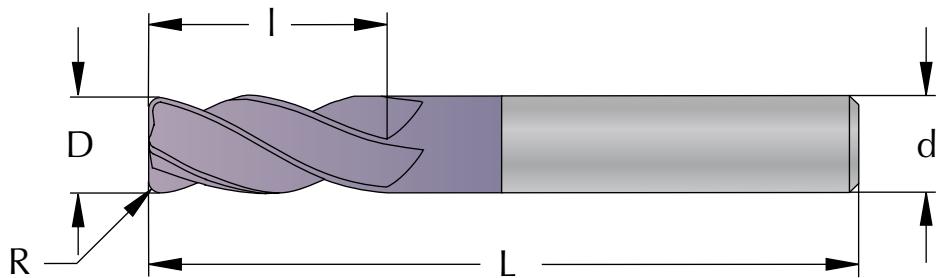

D mm	d mm	R mm	Part Number	I mm	L mm	Cutting edges
4,0	4	0,25	M0404D14R025_FC	14	50	4
4,0	4	0,50	M0404D14R05_FC	14	50	4
4,0	4	0,75	M0404D14R075_FC	14	50	4
4,0	4	1,00	M0404D14R10_FC	14	50	4
6,0	6	0,25	M0606D19R025_FC	19	63	4
6,0	6	0,50	M0606D19R05_FC	19	63	4
6,0	6	0,75	M0606D19R075_FC	19	63	4
6,0	6	1,00	M0606D19R10_FC	19	63	4
6,0	6	1,25	M0606D19R125_FC	19	63	4
6,0	6	1,50	M0606D19R15_FC	19	63	4
8,0	8	0,50	M0808D19R05_FC	19	63	4
8,0	8	0,75	M0808D19R075_FC	19	63	4
8,0	8	1,00	M0808D19R10_FC	19	63	4
8,0	8	1,25	M0808D19R125_FC	19	63	4
8,0	8	1,50	M0808D19R15_FC	19	63	4
8,0	8	2,00	M0808D19R20_FC	19	63	4
10,0	10	0,50	M1010D22R05_FC	22	70	4
10,0	10	0,75	M1010D22R075_FC	22	70	4
10,0	10	1,00	M1010D22R10_FC	22	70	4
10,0	10	1,50	M1010D22R15_FC	22	70	4
10,0	10	2,00	M1010D22R20_FC	22	70	4
10,0	10	3,00	M1010D22R30_FC	22	70	4
12,0	12	0,50	M1212D25R05_FC	25	75	4
12,0	12	0,75	M1212D25R075_FC	25	75	4
12,0	12	1,00	M1212D25R10_FC	25	75	4
12,0	12	1,50	M1212D25R15_FC	25	75	4
12,0	12	2,00	M1212D25R20_FC	25	75	4
12,0	12	3,00	M1212D25R30_FC	25	75	4
16,0	16	0,50	M1616D32R05_FC	32	88	4
16,0	16	0,75	M1616D32R075_FC	32	88	4
16,0	16	1,00	M1616D32R10_FC	32	88	4
16,0	16	1,50	M1616D32R15_FC	32	88	4
16,0	16	2,00	M1616D32R20_FC	32	88	4
16,0	16	3,00	M1616D32R30_FC	32	88	4
20,0	20	0,50	M2020D38R05_FC	38	100	4
20,0	20	0,75	M2020D38R075_FC	38	100	4
20,0	20	1,00	M2020D38R10_FC	38	100	4
20,0	20	1,50	M2020D38R15_FC	38	100	4
20,0	20	2,00	M2020D38R20_FC	38	100	4
20,0	20	3,00	M2020D38R30_FC	38	100	4

Two Flute, with Ball Nose
FC

TiAlN coated

Micrograin Carbide

Tolerance

D 1,0 - 25,0 +0 / -0,050

Shank


Cylindrical with h6 tolerance

Flute

30° right hand spiral

Field of application

All types of steel

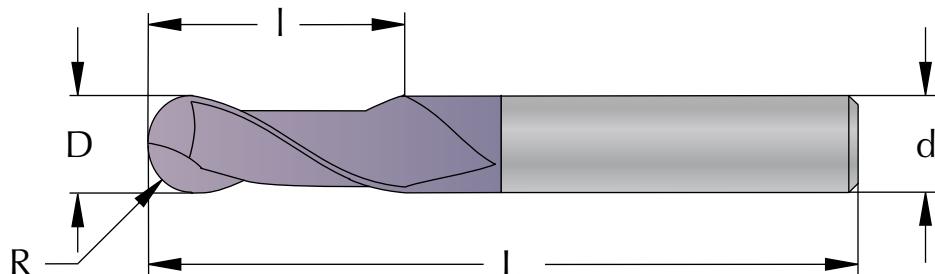

D mm	d mm	R mm	Part Number	I mm	L mm	Cutting edges
1,0	3	0,50	R0301B3_FC	3	38	2
1,5	3	0,75	R03015B5_FC	5	38	2
2,0	3	1,00	R0302B6_FC	6	38	2
2,5	3	1,25	R03025B7_FC	7	38	2
3,0	3	1,50	R0303B12_FC	12	38	2
3,0	3	1,50	R0303B25_FC	25	65	2
4,0	4	2,00	R0404B14_FC	14	50	2
4,0	4	2,00	R0404B25_FC	25	65	2
5,0	5	2,50	R0505B16_FC	16	50	2
5,0	5	2,50	R0505B25_FC	25	75	2
6,0	6	3,00	R0606B19_FC	19	63	2
6,0	6	3,00	R0606B25_FC	25	75	2
6,0	6	3,00	R0606B38_FC	38	100	2
8,0	8	4,00	R0808B19_FC	19	63	2
8,0	8	4,00	R0808B25_FC	25	75	2
8,0	8	4,00	R0808B38_FC	38	100	2
10,0	10	5,00	R1010B22_FC	22	70	2
10,0	10	5,00	R1010B38_FC	38	100	2
12,0	12	6,00	R1212B25_FC	25	75	2
12,0	12	6,00	R1212B50_FC	50	100	2
12,0	12	6,00	R1212B75_FC	75	150	2
14,0	14	7,00	R1414B30_FC	30	88	2
16,0	16	8,00	R1616B32_FC	32	88	2
16,0	16	8,00	R1616B75_FC	75	150	2
18,0	18	9,00	R1818B36_FC	36	100	2
20,0	20	10,0	R2020B38_FC	38	100	2
20,0	20	10,0	R2020B75_FC	75	150	2
25,0	25	12,5	R2525B75_FC	75	150	2

with Long Shank

D mm	d mm	R mm	Part Number	I mm	L mm	Cutting edges
2,0	2	1,0	R0202B10L100_FC	10	100	2
3,0	3	1,5	R0303B12L100_FC	12	100	2
4,0	4	2,0	R0404B15L120_FC	15	120	2
5,0	5	2,5	R0505B15L150_FC	15	150	2
6,0	6	3,0	R0606B20L150_FC	20	150	2
8,0	8	4,0	R0808B20L180_FC	20	180	2
10,0	10	5,0	R1010B25L200_FC	25	200	2
12,0	12	6,0	R1212B30L200_FC	30	200	2

Four Flute, with Ball Nose

FCTiAlN coated
Micrograin Carbide**Tolerance**

D 1,0 - 25,0 +0 / -0,050

Shank


Cylindrical with h6 tolerance

Flute

30° right hand spiral

Field of application

All types of steel

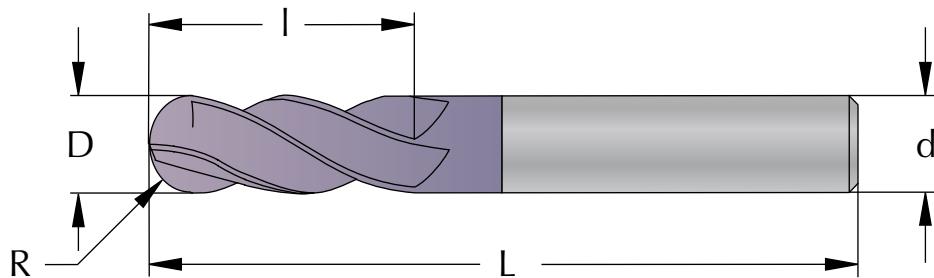


D mm	d mm	R mm	Part Number	I mm	L mm	Cutting edges
1,0	3	0,50	R0301D3_FC	3	38	4
1,5	3	0,75	R03015D5_FC	5	38	4
2,0	3	1,00	R0302D6_FC	6	38	4
2,5	3	1,25	R03025D7_FC	7	38	4
3,0	3	1,50	R0303D12_FC	12	38	4
3,0	3	1,50	R0303D25_FC	25	65	4
4,0	4	2,00	R0404D14_FC	14	50	4
4,0	4	2,00	R0404D25_FC	25	65	4
5,0	5	2,50	R0505D16_FC	16	50	4
5,0	5	2,50	R0505D25_FC	25	75	4
6,0	6	3,00	R0606D19_FC	19	63	4
6,0	6	3,00	R0606D25_FC	25	75	4
6,0	6	3,00	R0606D38_FC	38	100	4
8,0	8	4,00	R0808D19_FC	19	63	4
8,0	8	4,00	R0808D25_FC	25	75	4
8,0	8	4,00	R0808D38_FC	38	100	4
10,0	10	5,00	R1010D22_FC	22	70	4
10,0	10	5,00	R1010D38_FC	38	100	4
12,0	12	6,00	R1212D25_FC	25	75	4
12,0	12	6,00	R1212D50_FC	50	100	4
12,0	12	6,00	R1212D75_FC	75	150	4
14,0	14	7,00	R1414D30_FC	30	88	4
16,0	16	8,00	R1616D32_FC	32	88	4
16,0	16	8,00	R1616D75_FC	75	150	4
18,0	18	9,00	R1818D36_FC	36	100	4
20,0	20	10,0	R2020D38_FC	38	100	4
20,0	20	10,0	R2020D75_FC	75	150	4
25,0	25	12,5	R2525D75_FC	75	150	4


High Helix

FC
 TiAlN coated
 Micrograin Carbide

Tolerance
 D 10,0 - 40,0 +0 / -0,050
Shank
 Cylindrical h6, DIN6535 HA
Flute
 50° right hand spiral
Field of application
 All types of steel

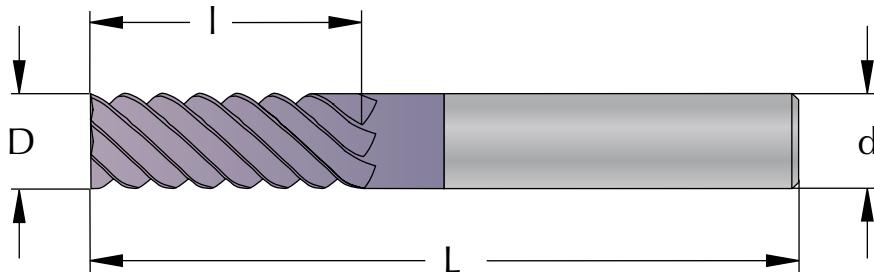

D mm	d mm	Part Number	I mm	L mm	Cutting edges
10,0	10	U1010F25_FC	25	76	6
12,0	12	U1212F30_FC	30	100	6
16,0	16	U1616F40_FC	40	100	6
20,0	20	U2020F45_FC	45	120	6
25,0	25	U2525F60_FC	60	130	6
32,0	32	U3232H75_FC	75	150	8
40,0	40	U4040J90_FC	90	170	10

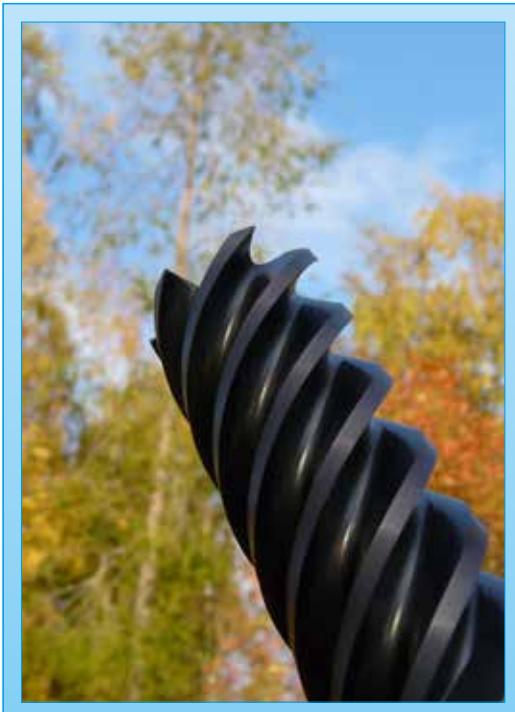

FC

TiAlN coated
Micrograin Carbide

Tolerance


D 6,0 - 40,0 +0 / -0,050

Shank

Cylindrical h6, DIN6535 HA

Flute50° right hand spiral
Negative cutting angle**Field of application**

Hard materials up to HRC 65

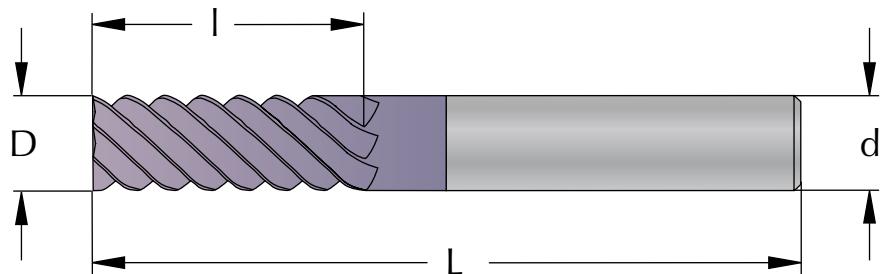

D mm	d mm	Part Number	I mm	L mm	Cutting edges
6,0	6	V0606F15_FC	15	64	6
8,0	8	V0808F20_FC	20	76	6
10,0	10	V1010F25_FC	25	76	6
12,0	12	V1212F30_FC	30	100	6
16,0	16	V1616F40_FC	40	100	6
20,0	20	V2020F45_FC	45	120	6
25,0	25	V2525H60_FC	60	130	8
32,0	32	V3232H75_FC	75	150	8
40,0	40	V4040J90_FC	90	170	10



Micro, Two Flute


FC
TiAlN coated
Super Micrograin Carbide

Tolerance
D 0,3 - 3,0 -0,002 / -0,012

Shank
Cylindrical h5, DIN6535 HA

Flute
30° right hand spiral, center cutting

Field of application
High speed cutting in steel

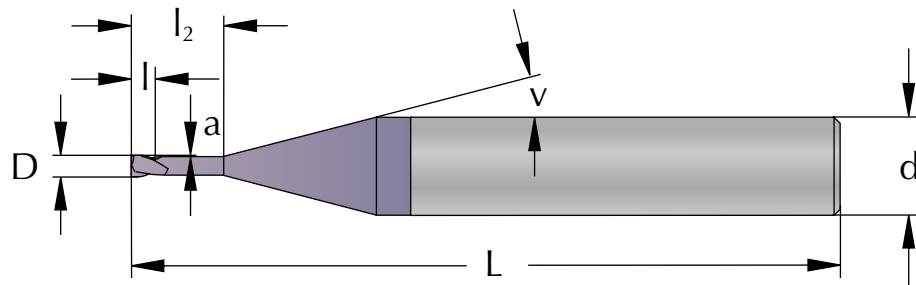

D mm	d mm	Part Number	l mm	l ₂ mm	L mm	a mm	v °	Cutting edges
0,1	6	MP06001B0.2_FC	0,15	0,15	64		10	2
0,2	6	MP06002B0.3_FC	0,3	0,3	64		10	2
0,3	6	MP06003B0.5_FC	0,5	0,5	64		11	2
0,3	6	MP06003B0.6_FC	0,5	1,5	64	0,010	11	2
0,3	6	MP06003B0.7_FC	0,5	3,0	64	0,010	12	2
0,4	6	MP06004B0.7_FC	0,6	0,6	64		11	2
0,4	6	MP06004B0.8_FC	0,6	2,0	64	0,010	11	2
0,4	6	MP06004B0.9_FC	0,6	4,0	64	0,010	13	2
0,5	6	MP06005B0.9_FC	0,8	0,8	64		11	2
0,5	6	MP06005B1_FC	0,8	3,0	64	0,015	12	2
0,5	6	MP06005B1.1_FC	0,8	6,0	64	0,015	15	2
0,5	6	MP06005B1.2_FC	0,8	8,0	64	0,015	15	2
0,5	6	MP06005B1.3_FC	0,8	10,0	64	0,015	15	2
0,6	6	MP06006B1.1_FC	0,9	0,9	64		10	2
0,6	6	MP06006B1.15_FC	0,9	2,0	64	0,025	11	2
0,6	6	MP06006B1.2_FC	0,9	4,0	64	0,025	13	2
0,6	6	MP06006B1.3_FC	0,9	6,0	64	0,025	15	2
0,6	6	MP06006B1.4_FC	0,9	8,0	64	0,025	15	2
0,6	6	MP06006B1.5_FC	0,9	10,0	64	0,025	15	2
0,8	6	MP06008B1.5_FC	1,2	1,2	64		10	2
0,8	6	MP06008B1.55_FC	1,2	2,5	64	0,025	11	2
0,8	6	MP06008B1.6_FC	1,2	5,0	64	0,025	13	2
0,8	6	MP06008B1.7_FC	1,2	8,0	64	0,025	15	2
0,8	6	MP06008B1.8_FC	1,2	10,0	64	0,025	15	2
1,0	6	MP0601B1.9_FC	1,5	1,5	64		10	2
1,0	6	MP0601B1.95_FC	1,5	4,0	64	0,025	12	2
1,0	6	MP0601B2_FC	1,5	6,0	64	0,025	14	2
1,0	6	MP0601B2.1_FC	1,5	10,0	64	0,025	15	2
1,0	6	MP0601B2.2_FC	1,5	15,0	64	0,025	15	2
1,0	6	MP0601B2.3_FC	1,5	20,0	64	0,025	15	2
1,0	6	MP0601B2.4_FC	1,5	25,0	64	0,025	15	2
1,2	6	MP0601B2.3_FC	1,8	1,8	64		10	2
1,2	6	MP0601B2.34_FC	1,8	4,0	64	0,025	11	2
1,2	6	MP0601B2.37_FC	1,8	6,0	64	0,025	14	2
1,2	6	MP0601B2.4_FC	1,8	8,0	64	0,025	15	2
1,2	6	MP0601B2.5_FC	1,8	12,0	64	0,025	15	2
1,2	6	MP0601B2.6_FC	1,8	16,0	64	0,025	15	2
1,5	6	MP06015B2.9_FC	2,3	2,3	64		10	2
1,5	6	MP06015B2.95_FC	2,3	6,0	64	0,025	13	2
1,5	6	MP06015B3_FC	2,3	10,0	64	0,025	15	2
1,5	6	MP06015B3.1_FC	2,3	15,0	64	0,025	15	2
1,5	6	MP06015B3.2_FC	2,3	20,0	64	0,025	15	2
1,5	6	MP06015B3.3_FC	2,3	25,0	64	0,025	15	2
2,0	6	MP0602B2.9_FC	3,0	3,0	64		9	2
2,0	6	MP0602B2.95_FC	3,0	6,0	64	0,05	11	2


D mm	d mm	Part Number	l mm	l ₂ mm	L mm	a mm	v °	Cutting edges
2,0	6	MP0602B3_FC	3,0	10,0	64	0,05	15	2
2,0	6	MP0602B3.1_FC	3,0	16,0	64	0,05	15	2
2,0	6	MP0602B3.2_FC	3,0	20,0	64	0,05	15	2
2,0	6	MP0602B3.3_FC	3,0	25,0	64	0,05	15	2
2,0	6	MP0602B3.4_FC	3,0	30,0	64	0,05	15	2
2,5	6	MP06025B2.9_FC	3,0	3,0	64		8	2
2,5	6	MP06025B2.95_FC	3,0	6,0	64	0,05	10	2
2,5	6	MP06025B3_FC	3,0	10,0	64	0,05	15	2
2,5	6	MP06025B3.1_FC	3,0	16,0	64	0,05	15	2
2,5	6	MP06025B3.2_FC	3,0	20,0	64	0,05	15	2
2,5	6	MP06025B3.3_FC	3,0	25,0	64	0,05	15	2
3,0	6	MP0603B2.9_FC	3,0	3,0	64		7	2
3,0	6	MP0603B2.95_FC	3,0	6,0	64	0,05	9	2
3,0	6	MP0603B3_FC	3,0	10,0	64	0,05	14	2
3,0	6	MP0603B3.1_FC	3,0	16,0	64	0,05	15	2
3,0	6	MP0603B3.2_FC	3,0	20,0	64	0,05	15	2
3,0	6	MP0603B3.3_FC	3,0	25,0	64	0,05	15	2
3,0	6	MP0603B3.4_FC	3,0	30,0	64	0,05	15	2

■ Micro End Mills are available with Corner Radius. The price is 10% higher.



Micro, Two Flute, with Ball Nose

FC
TiAlN coated
Super Micrograin Carbide
Tolerance
D 0,3 - 3,0 -0,002 / -0,012
Shank
Cylindrical h5, DIN6535 HA
Flute
30° right hand spiral
Field of application
High speed cutting in steel

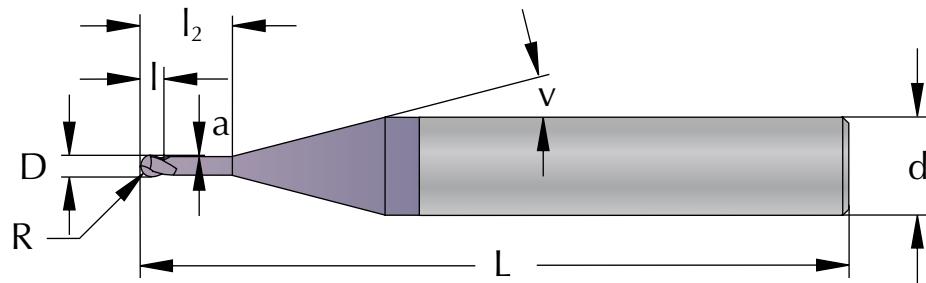

D mm	d mm	R mm	Part Number	l mm	l ₂ mm	L mm	a mm	v °	Cutting edges
0,2	6	0,10	RP06002B0.3_FC	0,3	0,3	64		10	2
0,3	6	0,15	RP06003B0.5_FC	0,5	0,5	64		11	2
0,3	6	0,15	RP06003B0.6_FC	0,5	1,5	64	0,010	11	2
0,3	6	0,15	RP06003B0.7_FC	0,5	3,0	64	0,010	12	2
0,4	6	0,2	RP06004B0.7_FC	0,6	0,6	64		11	2
0,4	6	0,2	RP06004B0.8_FC	0,6	2,0	64	0,010	11	2
0,4	6	0,2	RP06004B0.9_FC	0,6	4,0	64	0,010	13	2
0,5	6	0,25	RP06005B0.9_FC	0,8	0,8	64		11	2
0,5	6	0,25	RP06005B1_FC	0,8	3,0	64	0,015	12	2
0,5	6	0,25	RP06005B1.1_FC	0,8	6,0	64	0,015	15	2
0,5	6	0,25	RP06005B1.2_FC	0,8	8,0	64	0,015	15	2
0,5	6	0,25	RP06005B1.3_FC	0,8	10,0	64	0,015	15	2
0,6	6	0,3	RP06006B1.1_FC	0,9	0,9	64		10	2
0,6	6	0,3	RP06006B1.15_FC	0,9	2,0	64	0,025	11	2
0,6	6	0,3	RP06006B1.2_FC	0,9	4,0	64	0,025	13	2
0,6	6	0,3	RP06006B1.3_FC	0,9	6,0	64	0,025	15	2
0,6	6	0,3	RP06006B1.4_FC	0,9	8,0	64	0,025	15	2
0,6	6	0,3	RP06006B1.5_FC	0,9	10,0	64	0,025	15	2
0,8	6	0,4	RP06008B1.5_FC	1,2	1,2	64		10	2
0,8	6	0,4	RP06008B1.55_FC	1,2	2,5	64	0,025	11	2
0,8	6	0,4	RP06008B1.6_FC	1,2	5,0	64	0,025	13	2
0,8	6	0,4	RP06008B1.7_FC	1,2	8,0	64	0,025	15	2
0,8	6	0,4	RP06008B1.8_FC	1,2	10,0	64	0,025	15	2
1,0	6	0,5	RP0601B1.9_FC	1,5	1,5	64		10	2
1,0	6	0,5	RP0601B1.95_FC	1,5	4,0	64	0,025	12	2
1,0	6	0,5	RP0601B2_FC	1,5	6,0	64	0,025	14	2
1,0	6	0,5	RP0601B2.1_FC	1,5	10,0	64	0,025	15	2
1,0	6	0,5	RP0601B2.2_FC	1,5	15,0	64	0,025	15	2
1,0	6	0,5	RP0601B2.3_FC	1,5	20,0	64	0,025	15	2
1,0	6	0,5	RP0601B2.4_FC	1,5	25,0	64	0,025	15	2
1,2	6	0,6	RP06012B2.3_FC	1,8	1,8	64		10	2
1,2	6	0,6	RP06012B2.34_FC	1,8	4,0	64	0,025	11	2
1,2	6	0,6	RP06012B2.37_FC	1,8	6,0	64	0,025	14	2
1,2	6	0,6	RP06012B2.4_FC	1,8	8,0	64	0,025	15	2
1,2	6	0,6	RP06012B2.5_FC	1,8	12,0	64	0,025	15	2
1,2	6	0,6	RP06012B2.6_FC	1,8	16,0	64	0,025	15	2
1,5	6	0,75	RP06015B2.9_FC	2,3	2,3	64		10	2
1,5	6	0,75	RP06015B2.95_FC	2,3	6,0	64	0,025	13	2
1,5	6	0,75	RP06015B3_FC	2,3	10,0	64	0,025	15	2
1,5	6	0,75	RP06015B3.1_FC	2,3	15,0	64	0,025	15	2
1,5	6	0,75	RP06015B3.2_FC	2,3	20,0	64	0,025	15	2
1,5	6	0,75	RP06015B3.3_FC	2,3	25,0	64	0,025	15	2
2,0	6	1,0	RP0602B2.9_FC	3,0	3,0	64		9	2
2,0	6	1,0	RP0602B2.95_FC	3,0	6,0	64	0,05	11	2
2,0	6	1,0	RP0602B3_FC	3,0	10,0	64	0,05	15	2

D mm	d mm	R mm	Part Number	I mm	I ₂ mm	L mm	a mm	v °	Cutting edges
2,0	6	1,0	RP0602B3.1_FC	3,0	16,0	64	0,05	15	2
2,0	6	1,0	RP0602B3.2_FC	3,0	20,0	64	0,05	15	2
2,0	6	1,0	RP0602B3.3_FC	3,0	25,0	64	0,05	15	2
2,0	6	1,0	RP0602B3.4_FC	3,0	30,0	64	0,05	15	2
2,5	6	1,25	RP06025B2.9_FC	3,0	3,0	64		8	2
2,5	6	1,25	RP06025B2.95_FC	3,0	6,0	64	0,05	10	2
2,5	6	1,25	RP06025B3_FC	3,0	10,0	64	0,05	15	2
2,5	6	1,25	RP06025B3.1_FC	3,0	16,0	64	0,05	15	2
2,5	6	1,25	RP06025B3.2_FC	3,0	20,0	64	0,05	15	2
2,5	6	1,25	RP06025B3.3_FC	3,0	25,0	64	0,05	15	2
3,0	6	1,5	RP0603B2.9_FC	3,0	3,0	64		7	2
3,0	6	1,5	RP0603B2.95_FC	3,0	6,0	64	0,05	9	2
3,0	6	1,5	RP0603B3_FC	3,0	10,0	64	0,05	14	2
3,0	6	1,5	RP0603B3.1_FC	3,0	16,0	64	0,05	15	2
3,0	6	1,5	RP0603B3.2_FC	3,0	20,0	64	0,05	15	2
3,0	6	1,5	RP0603B3.3_FC	3,0	25,0	64	0,05	15	2
3,0	6	1,5	RP0603B3.4_FC	3,0	30,0	64	0,05	15	2



Two Flute, with Corner Radius

FC

TiAlN coated

Super Micrograin Carbide

Tolerance

D 1,0 - 3,0 -0,002 / -0,012

D 4,0 - 6,0 -0,004 / -0,016

D 7,0 - 10,0 -0,005 / -0,020

D 11,0 - 18,0 -0,006 / -0,024

Shank


Cylindrical h5, DIN6535 HA

Flute

30° right hand spiral, center cutting

Field of application

High speed cutting in steel

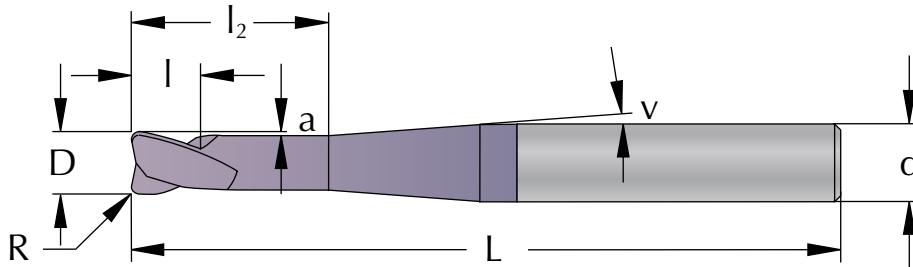

D mm	d mm	R mm	Part Number	l mm	l ₂ mm	L mm	a mm	v °	Cutting edges
1,5	6	0,3	MH06015B2R03L64_FC	2	5	64	0,05	7,0	2
1,5	6	0,3	MH06015B2.1R03L64_FC	2	10	64	0,05	9,0	2
2,0	6	0,5	MH0602B3R05L64_FC	3	5	64	0,05	6,0	2
2,0	6	0,5	MH0602B3.1R05L64_FC	3	10	64	0,05	8,0	2
2,0	6	0,5	MH0602B3R05L78_FC	3	15	78	0,05	5,0	2
3,0	6	0,5	MH0603B4R05L64_FC	4	7	64	0,05	5,0	2
3,0	6	0,5	MH0603B4R05L78_FC	4	15	78	0,05	4,0	2
4,0	6	0,5	MH0604B5R05L64_FC	5	8	64	0,1	4,0	2
4,0	6	0,5	MH0604B5R05L78_FC	5	15	78	0,1	2,5	2
4,0	6	1,0	MH0604B5R10L64_FC	5	8	64	0,1	4,0	2
4,0	6	1,0	MH0604B5R10L78_FC	5	15	78	0,1	2,5	2
5,0	6	0,5	MH0605B5R05L64_FC	5	10	64	0,15	2,5	2
5,0	6	0,5	MH0605B5R05L78_FC	5	20	78	0,15	2,0	2
5,0	6	1,0	MH0605B5R10L64_FC	5	10	64	0,15	2,5	2
5,0	6	1,0	MH0605B5R10L78_FC	5	20	78	0,15	2,0	2
6,0	6	0,5	MH0606B6R05L64_FC	6	25	64	0,2	2	
6,0	6	0,5	MH0606B6R05L78_FC	6	35	78	0,2	2	
6,0	8	0,5	MH0806B6R05L100_FC	6	25	100	0,2	2,0	2
6,0	6	1,0	MH0606B6R10L64_FC	6	25	64	0,2	2	
6,0	6	1,0	MH0606B6R10L78_FC	6	35	78	0,2	2	
6,0	8	1,0	MH0806B6R10L100_FC	6	25	100	0,2	2	
6,0	6	1,5	MH0606B6R15L64_FC	6	25	64	0,2	2	
6,0	6	1,5	MH0606B6R15L78_FC	6	35	78	0,2	2	
6,0	8	1,5	MH0806B6R15L100_FC	6	25	100	0,2	2,0	2
8,0	8	0,5	MH0808B8R05L64_FC	8	25	64	0,3	2	
8,0	8	0,5	MH0808B8R05L78_FC	8	25	78	0,3	2	
8,0	8	1,0	MH0808B8R10L64_FC	8	25	64	0,3	2	
8,0	8	1,0	MH0808B8R10L78_FC	8	35	78	0,3	2	
8,0	8	1,0	MH0808B8R10L100_FC	8	50	100	0,3	2	
8,0	8	2,0	MH0808B8R20L64_FC	8	25	64	0,3	2	
8,0	8	2,0	MH0808B8R20L78_FC	8	35	78	0,3	2	
8,0	8	2,0	MH0808B8R20L100_FC	8	50	100	0,3	2	
8,0	10	1,0	MH1008B8R10L120_FC	8	30	120	0,3	1,5	2
8,0	10	2,0	MH1008B8R20L120_FC	8	30	120	0,3	1,5	2
10,0	10	0,5	MH1010B10R05L78_FC	10	35	78	0,3	2	
10,0	10	1,0	MH1010B10R10L100_FC	10	55	100	0,3	2	
10,0	10	2,0	MH1010B10R20L78_FC	10	35	78	0,3	2	
10,0	10	2,0	MH1010B10R20L100_FC	10	55	100	0,3	2	
10,0	12	2,0	MH1210B10R20L120_FC	10	30	120	0,3	1,5	2
12,0	12	0,5	MH1212B12R05L78_FC	12	35	78	0,3	2	
12,0	12	1,0	MH1212B12R10L100_FC	12	55	100	0,3	2	
12,0	12	2,0	MH1212B12R20L78_FC	12	35	78	0,3	2	
12,0	12	2,0	MH1212B12R20L100_FC	12	55	100	0,3	2	
12,0	16	2,0	MH1612B12R20L120_FC	12	40	120	0,3	4,5	2
16,0	16	3,5	MH1616B20R35L100_FC	20	50	100	0,3	2	
16,0	16	3,5	MH1616B20R35L150_FC	20	100	150	0,3	2	

Four Flute, with Corner Radius

FC

TiAlN coated
Super Micrograin Carbide

Tolerance

D 1,0 - 3,0 -0,002 / -0,012
D 4,0 - 6,0 -0,004 / -0,016
D 7,0 - 10,0 -0,005 / -0,020
D 11,0 - 18,0 -0,006 / -0,024

Shank


Cylindrical h5, DIN6535 HA

Flute

30° right hand spiral, center cutting

Field of application

High speed cutting in steel

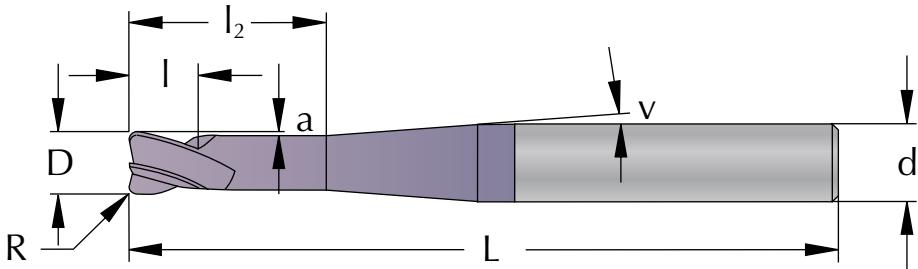

D mm	d mm	R mm	Part Number	l mm	l ₂ mm	L mm	a mm	v °	Cutting edges
6,0	6	0,5	MH0606D6R05L64_FC	6	25	64	0,2		4
6,0	6	0,5	MH0606D6R05L78_FC	6	35	78	0,2		4
6,0	6	1,0	MH0606D6R10L64_FC	6	25	64	0,2		4
6,0	6	1,5	MH0606D6R15L64_FC	6	25	64	0,2		4
6,0	6	1,5	MH0606D6R15L78_FC	6	35	78	0,2		4
6,0	8	0,5	MH0806D6R05L100_FC	6	25	100	0,2	2,0	4
6,0	8	1,5	MH0806D6R15L100_FC	6	25	100	0,2	2,0	4
8,0	8	0,5	MH0808D8R05L64_FC	8	25	64	0,3		4
8,0	8	0,5	MH0808D8R05L78_FC	8	25	78	0,3		4
8,0	8	1,0	MH0808D8R10L64_FC	8	25	64	0,3		4
8,0	8	1,0	MH0808D8R10L78_FC	8	35	78	0,3		4
8,0	8	1,0	MH0808D8R10L100_FC	8	50	100	0,3		4
8,0	8	2,0	MH0808D8R20L64_FC	8	25	64	0,3		4
8,0	8	2,0	MH0808D8R20L78_FC	8	35	78	0,3		4
8,0	8	2,0	MH0808D8R20L100_FC	8	50	100	0,3		4
8,0	10	1,0	MH1008D8R10L120_FC	8	30	120	0,3	1,5	4
8,0	10	2,0	MH1008D8R20L120_FC	8	30	120	0,3	1,5	4
10,0	10	0,5	MH1010D10R05L78_FC	10	35	78	0,3		4
10,0	10	1,0	MH1010D10R10L100_FC	10	55	100	0,3		4
10,0	10	2,0	MH1010D10R20L78_FC	10	35	78	0,3		4
10,0	10	2,0	MH1010D10R20L100_FC	10	55	100	0,3		4
10,0	12	2,0	MH1210D10R20L120_FC	10	30	120	0,3	1,5	4
12,0	12	0,5	MH1212D12R05L78_FC	12	35	78	0,3		4
12,0	12	1,0	MH1212D12R10L100_FC	12	55	100	0,3		4
12,0	12	2,0	MH1212D12R20L78_FC	12	35	78	0,3		4
12,0	12	2,0	MH1212D12R20L100_FC	12	55	100	0,3		4
12,0	16	2,0	MH1612D12R20L120_FC	12	40	120	0,3	4,5	4
16,0	16	3,5	MH1616D20R35L100_FC	20	50	100	0,3		4
16,0	16	3,5	MH1616D20R35L150_FC	20	100	150	0,3		4

Two Flute, with Ball Nose

FC

TiAlN coated

Super Micrograin Carbide

Tolerance

D 1,0 - 3,0 -0,002 / -0,012

D 4,0 - 6,0 -0,004 / -0,016

D 7,0 - 10,0 -0,005 / -0,020

D 11,0 - 18,0 -0,006 / -0,024

Shank


Cylindrical h5, DIN6535 HA

Flute

30° right hand spiral

Field of application

High speed cutting in steel

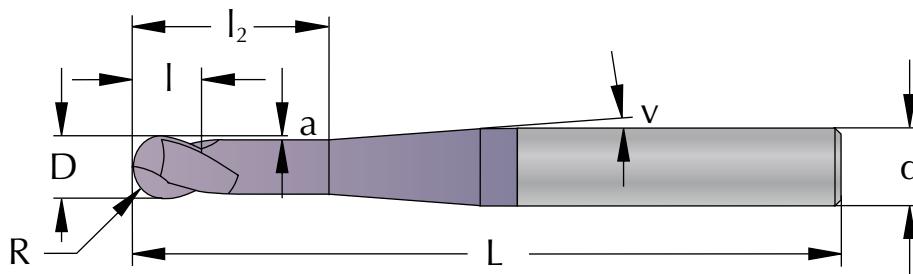

D mm	d mm	R mm	Part Number	l mm	l ₂ mm	L mm	a mm	v °	Cutting edges
1,0	6	0,5	RH0601B2L64_FC	2	4	64	0,05	7,0	2
1,5	6	0,75	RH06015B2L64_FC	2	4	64	0,05	6,5	2
2,0	6	1,0	RH0602B3L64_FC	3	5	64	0,05	6,0	2
2,0	6	1,0	RH0602B3L78_FC	3	15	78	0,05	5,0	2
3,0	6	1,5	RH0603B4L64_FC	4	7	64	0,05	5,0	2
3,0	6	1,5	RH0603B4L78_FC	4	15	78	0,05	4,0	2
4,0	6	2,0	RH0604B5L64_FC	5	8	64	0,1	4,0	2
4,0	6	2,0	RH0604B5L78_FC	5	15	78	0,1	2,5	2
5,0	6	2,5	RH0605B5L64_FC	5	10	64	0,15	2,5	2
5,0	6	2,5	RH0605B5L78_FC	5	20	78	0,15	2,0	2
6,0	6	3,0	RH0606B6L64_FC	6	25	64	0,2	2	
6,0	6	3,0	RH0606B6L78_FC	6	35	78	0,2	2	
6,0	8	3,0	RH0806B6L100_FC	6	25	100	0,2	2,0	2
6,0	8	3,0	RH0806B6L150_FC	6	15	150	0,2	1,5	2
8,0	8	4,0	RH0808B8L64_FC	8	25	64	0,3	2	
8,0	8	4,0	RH0808B8L78_FC	8	35	78	0,3	2	
8,0	8	4,0	RH0808B8L100_FC	8	50	100	0,3	2	
8,0	10	4,0	RH1008B8L120_FC	8	30	120	0,3	1,5	2
8,0	10	4,0	RH1008B8L150_FC	8	20	150	0,3	1,5	2
10,0	10	5,0	RH1010B10L78_FC	10	35	78	0,3	2	
10,0	10	5,0	RH1010B10L100_FC	10	55	100	0,3	2	
10,0	12	5,0	RH1210B10L100_FC	10	30	100	0,3	3,5	2
10,0	12	5,0	RH1210B10L120_FC	10	30	120	0,3	1,5	2
10,0	12	5,0	RH1210B10L150_FC	10	25	150	0,3	1,5	2
12,0	12	6,0	RH1212B12L78_FC	12	35	78	0,3	2	
12,0	12	6,0	RH1212B12L100_FC	12	55	100	0,3	2	
12,0	16	6,0	RH1612B12L120_FC	12	40	120	0,3	4,5	2
12,0	16	6,0	RH1612B12L150_FC	12	30	150	0,3	2,0	2
16,0	16	8,0	RH1616B20L100_FC	20	50	100	0,3	2	
16,0	16	8,0	RH1616B20L150_FC	20	100	150	0,3	2	

Four Flute, with Ball Nose

FC

TiAlN coated

Super Micrograin Carbide

Tolerance

D 1,0 - 3,0 -0,002 / -0,012

D 4,0 - 6,0 -0,004 / -0,016

D 7,0 - 10,0 -0,005 / -0,020

D 11,0 - 18,0 -0,006 / -0,024

Shank


Cylindrical h5, DIN6535 HA

Flute

30° right hand spiral

Field of application

High speed cutting in steel

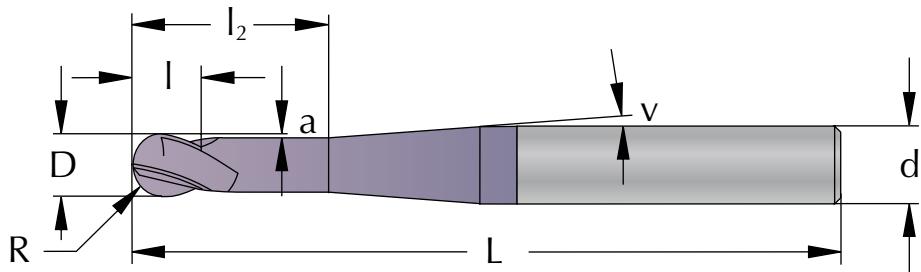

D mm	d mm	R mm	Part Number	l mm	l ₂ mm	L mm	a mm	v °	Cutting edges
6,0	6	3,0	RH0606D6L64_FC	6	25	64	0,2		4
6,0	6	3,0	RH0606D6L78_FC	6	35	78	0,2		4
6,0	8	3,0	RH0806D6L100_FC	6	25	100	0,2	2,0	4
8,0	8	4,0	RH0808D8L64_FC	8	25	64	0,3		4
8,0	8	4,0	RH0808D8L78_FC	8	35	78	0,3		4
8,0	8	4,0	RH0808D8L100_FC	8	50	100	0,3		4
8,0	10	4,0	RH1008D8L120_FC	8	30	120	0,3	1,5	4
10,0	10	5,0	RH1010D10L78_FC	10	35	78	0,3		4
10,0	10	5,0	RH1010D10L100_FC	10	55	100	0,3		4
10,0	12	5,0	RH1210D10L120_FC	10	30	120	0,3	1,5	4
12,0	12	6,0	RH1212D12L78_FC	12	35	78	0,3		4
12,0	12	6,0	RH1212D12L100_FC	12	55	100	0,3		4
12,0	16	6,0	RH1612D12L120_FC	12	40	120	0,3	4,5	4
16,0	16	8,0	RH1616D20L100_FC	20	50	100	0,3		4
16,0	16	8,0	RH1616D20L150_FC	20	100	150	0,3		4

Two Flute, with 220° Ball Nose

FC

TiAlN coated

Super Micrograin Carbide

Tolerance

D 1,0 - 3,0 -0,002 / -0,012

D 4,0 - 6,0 -0,004 / -0,016

D 7,0 - 10,0 -0,005 / -0,020

D 11,0 - 18,0 -0,006 / -0,024

Shank


Cylindrical h5, DIN6535 HA

Flute

30° right hand spiral

Field of application

High speed cutting in steel

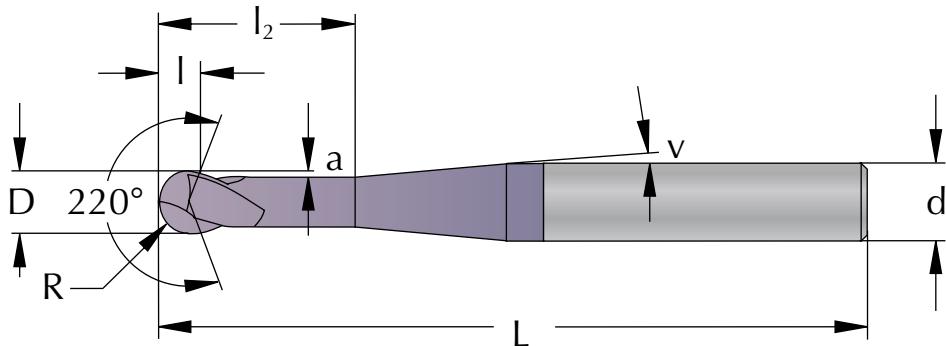

D mm	d mm	R mm	Part Number	l mm	l ₂ mm	L mm	a mm	v °	Cutting edges
3,0	6	1,5	BH0603B2.1L64_FC	2,1	25	64	0,15	10,7	2
4,0	6	2,0	BH0604B2.8L64_FC	2,8	25	64	0,2	10,1	2
5,0	6	2,5	BH0605B3.5L78_FC	3,5	30	78	0,3	4,3	2
6,0	6	3,0	BH0606B4.1L78_FC	4,1	37	78	0,36		2
8,0	8	4,0	BH0808B5.5L89_FC	5,5	46	89	0,48		2
10,0	10	5,0	BH1010B6.9L100_FC	6,9	55	100	0,6		2
12,0	12	6,0	BH1212B8.2L120_FC	8,2	72	120	0,72		2
16,0	16	8,0	BH1616B11L120_FC	11	72	120	0,96		2



Roughing End Mill

FC

TiAlN coated
Super Micrograin Carbide

Tolerance

D 1,0 - 3,0 -0,002 / -0,012
D 4,0 - 6,0 -0,004 / -0,016
D 7,0 - 10,0 -0,005 / -0,020
D 11,0 - 18,0 -0,006 / -0,024

Shank


Cylindrical h5, DIN6535 HA

Flute

45° right hand spiral, center cutting

Field of application

High speed cutting in steel

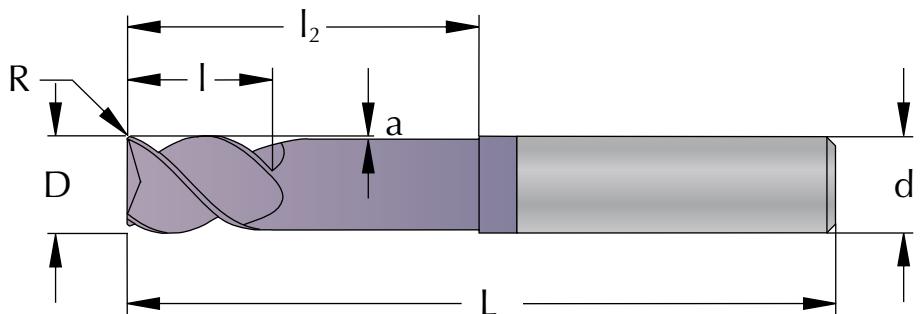

D mm	d mm	R mm	Part Number	l mm	l ₂ mm	L mm	a mm	Cutting edges
2,0	3	0,2	TH0302C3_FC	3	10	39	0,05	3
3,0	3	0,2	TH0303C4_FC	4	10	39	0,05	3
4,0	6	0,2	TH0604C5_FC	5	12	64	0,1	3
5,0	6	0,2	TH0605C6_FC	6	14	64	0,15	3
6,0	6	0,3	TH0606C7_FC	7	16	64	0,2	3
8,0	8	0,5	TH0808C9_FC	9	20	64	0,3	3
10,0	10	0,5	TH1010C12_FC	12	25	70	0,3	3
12,0	12	0,5	TH1212C15_FC	15	30	78	0,3	3
16,0	16	0,5	TH1616C18_FC	18	38	89	0,3	3



Micro, Two Flute

DC

 Diamond coated
Micrograin Carbide

Tolerance


D 0,3 - 3,0 -0,002 / -0,012

Shank

Cylindrical h5, DIN6535 HA

Flute

 40° right hand spiral
Center cutting

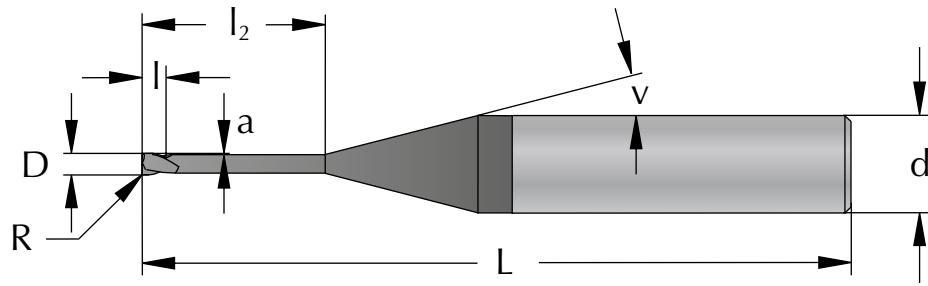Field of application
Graphite


D mm	d mm	R mm	Part Number	l mm	l ₂ mm	L mm	a mm	v °	Cutting edges
0,3	6	0,05	MG06003B1_DC	1,0	1,0	64		7	2
0,3	6	0,05	MG06003B1.4_DC	1,5	2,5	64	0,01	7	2
0,3	6	0,05	MG06003B1.5_DC	1,5	5,0	64	0,01	8	2
0,4	6	0,05	MG06004B1_DC	1,0	1,0	64		7	2
0,4	6	0,05	MG06004B1.4_DC	1,5	2,5	64	0,01	7	2
0,4	6	0,05	MG06004B1.5_DC	1,5	5,0	64	0,01	8	2
0,5	6	0,05	MG06005B1.3_DC	1,5	1,5	64		7	2
0,5	6	0,05	MG06005B1.4_DC	1,5	3,5	64	0,01	7	2
0,5	6	0,05	MG06005B1.5_DC	1,5	7,0	64	0,01	9	2
0,5	6	0,05	MG06005B1.6_DC	1,5	10,0	64	0,01	10	2
0,6	6	0,05	MG06006B1.8_DC	1,5	1,5	64		6	2
0,6	6	0,05	MG06006B1.9_DC	2,0	3,5	64	0,025	7	2
0,6	6	0,05	MG06006B2_DC	2,0	7,0	64	0,025	9	2
0,6	6	0,05	MG06006B2.1_DC	2,0	10,0	64	0,025	10	2
0,8	6	0,05	MG06008B1.8_DC	2,0	2,0,	64		6	2
0,8	6	0,05	MG06008B1.9_DC	2,0	5,0	64	0,025	8	2
0,8	6	0,05	MG06008B1.95_DC	2,0	7,5	64	0,025	9	2
0,8	6	0,05	MG06008B2_DC	2,0	10,0	64	0,025	10	2
0,8	6	0,05	MG06008B2.1_DC	2,0	15,0	64	0,025	14	2
1,0	6	0,05	MG0601B2.5_DC	2,5	2,5	64		6	2
1,0	6	0,05	MG0601B2.9_DC	3,0	5,0	64	0,025	7	2
1,0	6	0,05	MG0601B2.95_DC	3,0	7,5	64	0,025	8	2
1,0	6	0,05	MG0601B3_DC	3,0	10,0	64	0,025	10	2
1,0	6	0,05	MG0601B3.1_DC	3,0	15,0	64	0,025	13	2
1,2	6	0,05	MG06012B2.9_DC	3,0	5,0	64	0,025	7	2
1,2	6	0,05	MG06012B3_DC	3,0	10,0	64	0,025	9	2
1,5	6	0,05	MG06015B2.9_DC	3,0	5,0	64	0,025	7	2
1,5	6	0,05	MG06015B2.95_DC	3,0	7,5	64	0,025	8	2
1,5	6	0,05	MG06015B3_DC	3,0	10,0	64	0,025	9	2
1,5	6	0,05	MG06015B3.1_DC	3,0	15,0	64	0,025	12	2
1,5	6	0,05	MG06015B3.2_DC	3,0	20,0	64	0,025	15	2

Micro, Two Flute, with Ball Nose

DCDiamond coated
Micrograin Carbide**Tolerance**

D 0,3 - 3,0 -0,002 / -0,012

Shank


Cylindrical h5, DIN6535 HA

Flute

40° right hand spiral

Field of application

Graphite

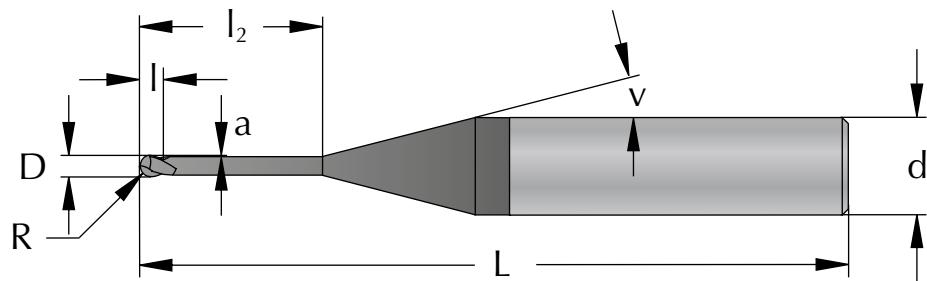

D mm	d mm	R mm	Part Number	l mm	l ₂ mm	L mm	a mm	v °	Cutting edges
0,3	6	0,15	RG06003B1_DC	1,0	1,0	64		7	2
0,3	6	0,15	RG06003B1.4_DC	1,5	2,5	64	0,01	7	2
0,3	6	0,15	RG06003B1.5_DC	1,5	5,0	64	0,01	8	2
0,4	6	0,2	RG06004B1_DC	1,0	1,0	64		7	2
0,4	6	0,2	RG06004B1.4_DC	1,5	2,5	64	0,01	7	2
0,4	6	0,2	RG06004B1.5_DC	1,5	5,0	64	0,01	8	2
0,5	6	0,25	RG06005B1.3_DC	1,5	1,5	64		7	2
0,5	6	0,25	RG06005B1.4_DC	1,5	3,5	64	0,01	7	2
0,5	6	0,25	RG06005B1.5_DC	1,5	7,0	64	0,01	9	2
0,5	6	0,25	RG06005B1.6_DC	1,5	10,0	64	0,01	10	2
0,6	6	0,3	RG06006B1.8_DC	1,5	1,5	64		6	2
0,6	6	0,3	RG06006B1.9_DC	2,0	3,5	64	0,025	7	2
0,6	6	0,3	RG06006B2_DC	2,0	7,0	64	0,025	9	2
0,6	6	0,3	RG06006B2.1_DC	2,0	10,0	64	0,025	10	2
0,8	6	0,4	RG06008B1.8_DC	2,0	2,0,	64		6	2
0,8	6	0,4	RG06008B1.9_DC	2,0	5,0	64	0,025	8	2
0,8	6	0,4	RG06008B1.95_DC	2,0	7,5	64	0,025	9	2
0,8	6	0,4	RG06008B2_DC	2,0	10,0	64	0,025	10	2
0,8	6	0,4	RG06008B2.1_DC	2,0	15,0	64	0,025	14	2
1,0	6	0,5	RG0601B2.5_DC	2,5	2,5	64		6	2
1,0	6	0,5	RG0601B2.9_DC	3,0	5,0	64	0,025	7	2
1,0	6	0,5	RG0601B2.95_DC	3,0	7,5	64	0,025	8	2
1,0	6	0,5	RG0601B3_DC	3,0	10,0	64	0,025	10	2
1,0	6	0,5	RG0601B3.1_DC	3,0	15,0	64	0,025	13	2
1,2	6	0,6	RG06012B2.9_DC	3,0	5,0	64	0,025	7	2
1,2	6	0,6	RG06012B3_DC	3,0	10,0	64	0,025	9	2
1,5	6	0,75	RG06015B2.9_DC	3,0	5,0	64	0,025	7	2
1,5	6	0,75	RG06015B2.95_DC	3,0	7,5	64	0,025	8	2
1,5	6	0,75	RG06015B3_DC	3,0	10,0	64	0,025	9	2
1,5	6	0,75	RG06015B3.1_DC	3,0	15,0	64	0,025	12	2
1,5	6	0,75	RG06015B3.2_DC	3,0	20,0	64	0,025	15	2

Three Flute, with Corner Radius

DC

 Diamond coated
 Micrograin Carbide

Tolerance

 D 1,0 - 3,0 -0,002 / -0,012
 D 4,0 - 6,0 -0,004 / -0,016
 D 7,0 - 10,0 -0,005 / -0,020
 D 11,0 - 18,0 -0,006 / -0,024

Shank


Cylindrical h5, DIN6535 HA

Flute

40° right hand spiral, center cutting

Field of application

Graphite

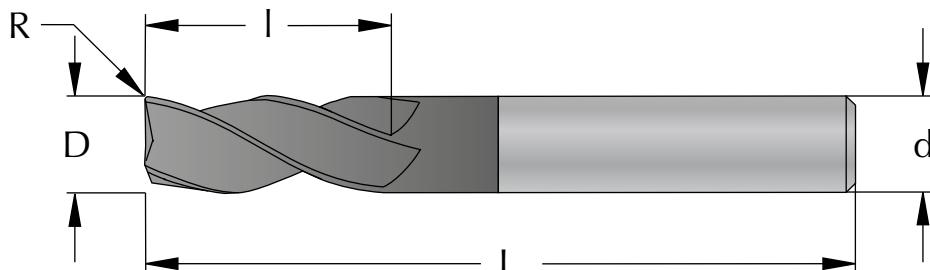

D mm	d mm	R mm	Part Number	l mm	L mm	Cutting edges
2,0	3	0,1	MG0302C10_DC	10	50	3
3,0	3	0,1	MG0303C10_DC	10	50	3
4,0	4	0,2	MG0404C15_DC	15	60	3
5,0	5	0,2	MG0505C20_DC	20	60	3
6,0	6	0,3	MG0606C30_DC	30	78	3
8,0	8	0,3	MG0808C30_DC	30	78	3
10,0	10	0,3	MG1010C30_DC	30	78	3
12,0	12	0,3	MG1212C30_DC	30	89	3

Two Flute, with Corner Radius, Long Shank

DC

 Diamond coated
 Micrograin Carbide

Tolerance

 D 1,0 - 3,0 -0,002 / -0,012
 D 4,0 - 6,0 -0,004 / -0,016
 D 7,0 - 10,0 -0,005 / -0,020
 D 11,0 - 18,0 -0,006 / -0,024

Shank


Cylindrical h5, DIN6535 HA

Flute

40° right hand spiral, center cutting

Field of application

Graphite

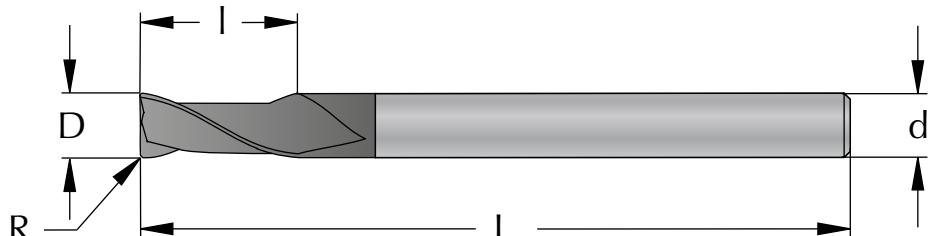

D mm	d mm	R mm	Part Number	l mm	L mm	Cutting edges
4,0	4	0,3	MG0404B10L100_DC	10	100	2
5,0	5	0,5	MG0505B13L100_DC	13	100	2
6,0	6	0,5	MG0606B42L100_DC	42	100	2
6,0	6	0,5	MG0606B26L150_DC	26	150	2
8,0	8	0,5	MG0808B41L150_DC	41	150	2
10,0	10	0,5	MG1010B42L150_DC	42	150	2

DC

Diamond coated

Micrograin Carbide

Tolerance

D 1,0 - 3,0 -0,002 / -0,012

D 4,0 - 6,0 -0,004 / -0,016

D 7,0 - 10,0 -0,005 / -0,020

D 11,0 - 18,0 -0,006 / -0,024

Shank


Cylindrical h5, DIN6535 HA

Flute

40° right hand spiral, center cutting

Field of application

Graphite

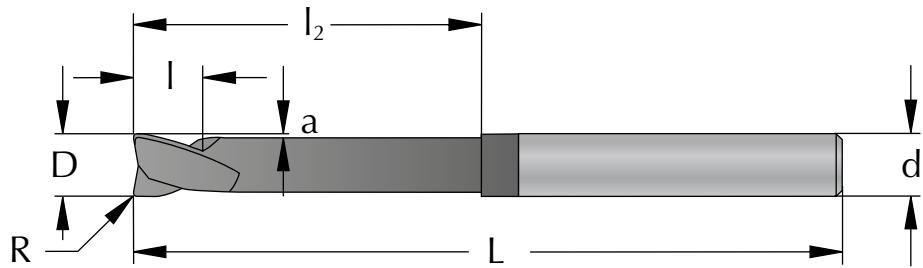

D mm	d mm	R mm	Part Number	l mm	l ₂ mm	L mm	a mm	Cutting edges
2,0	3	0,1	MG0302B3_DC	3	10	50	0,1	2
3,0	6	0,1	MG0603B4_DC	4	10	50	0,1	2
4,0	6	0,2	MG0604D4_DC	4	10	50	0,1	4
5,0	6	0,2	MG0605D5_DC	5	10	50	0,15	4
6,0	6	0,3	MG0606D6_DC	6	10	50	0,2	4
8,0	8	0,3	MG0808D8_DC	8	15	64	0,3	4
10,0	10	0,3	MG1010D10_DC	10	20	78	0,3	4
12,0	12	0,3	MG1212D10_DC	10	20	78	0,3	4

Three Flute, with Ball Nose

DC

Diamond coated
Micrograin Carbide

Tolerance

D 1,0 - 3,0 -0,002 / -0,012
D 4,0 - 6,0 -0,004 / -0,016
D 7,0 - 10,0 -0,005 / -0,020
D 11,0 - 18,0 -0,006 / -0,024

Shank


Cylindrical h5, DIN6535 HA

Flute

40° right hand spiral

Field of application

Graphite

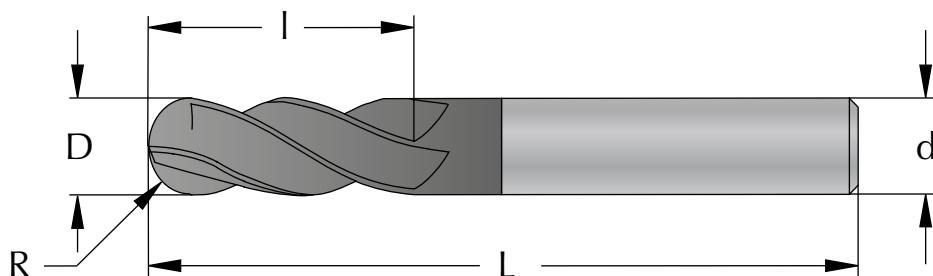

D mm	d mm	R mm	Part Number	I mm	L mm	Cutting edges
2,0	3	1,0	RG0302C10_DC	10	50	3
3,0	3	1,5	RG0303C10_DC	10	50	3
4,0	4	2,0	RG0404C15_DC	15	60	3
5,0	5	2,5	RG0505C20_DC	20	60	3
6,0	6	3,0	RG0606C30_DC	30	78	3
8,0	8	4,0	RG0808C30_DC	30	78	3
10,0	10	5,0	RG1010C30_DC	30	78	3
12,0	12	6,0	RG1212C30_DC	30	89	3

Two Flute, with Ball Nose, Long Shank

DC

Diamond coated
Micrograin Carbide

Tolerance

D 1,0 - 3,0 -0,002 / -0,012
D 4,0 - 6,0 -0,004 / -0,016
D 7,0 - 10,0 -0,005 / -0,020
D 11,0 - 18,0 -0,006 / -0,024

Shank


Cylindrical h5, DIN6535 HA

Flute

40° right hand spiral

Field of application

Graphite

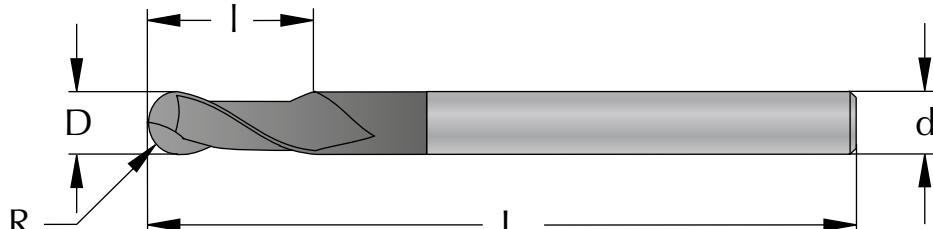

D mm	d mm	R mm	Part Number	I mm	L mm	Cutting edges
2,0	3	1,0	RG0302B6L100_DC	6	100	2
3,0	3	1,5	RG0303B16L100_DC	16	100	2
4,0	4	2,0	RG0404B16L100_DC	16	100	2
6,0	6	3,0	RG0606B42L100_DC	42	100	2
6,0	6	3,0	RG0606B42L150_DC	42	150	2
8,0	8	4,0	RG0808B42L100_DC	42	100	2
8,0	8	4,0	RG0808B42L150_DC	42	150	2
10,0	10	5,0	RG1010B45L150_DC	45	150	2

Two/Four Flute, with Ball Nose

DC

Diamond coated

Micrograin Carbide

Tolerance

D 1,0 - 3,0 -0,002 / -0,012

D 4,0 - 6,0 -0,004 / -0,016

D 7,0 - 10,0 -0,005 / -0,020

D 11,0 - 18,0 -0,006 / -0,024

Shank


Cylindrical h5, DIN6535 HA

Flute

40° right hand spiral

Field of application

Graphite

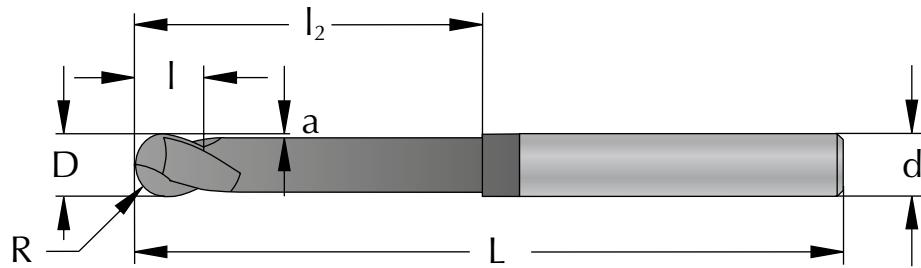

D mm	d mm	R mm	Part Number	l mm	l ₂ mm	L mm	a mm	Cutting edges
2,0	3	1,0	RG0302B3_DC	3	10	50	0,1	2
3,0	6	1,5	RG0603B4_DC	4	10	50	0,1	2
4,0	6	2,0	RG0604D4_DC	4	10	50	0,1	4
5,0	6	2,5	RG0605D5_DC	5	10	50	0,15	4
6,0	6	3,0	RG0606D6_DC	6	10	50	0,2	4
8,0	8	4,0	RG0808D8_DC	8	15	64	0,3	4
10,0	10	5,0	RG1010D10_DC	10	20	78	0,3	4
12,0	12	6,0	RG1212D10_DC	10	20	78	0,3	4




SOLID CARBIDE DRILLS

CONTENTS



TECHNICAL INFORMATION

100

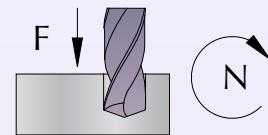


SOLID CARBIDE DRILLS

102



SOLIDE CARBIDE DRILLS WITH
INTERNAL COOLANT

106



Cutting Speed (V_c) and Material Factor (F_m)

MATERIAL		Hardness HB	Tensile Strength N/mm ²		Material Factor (F_m)
Steel	Low carbon, C < 0,25%	< 120	< 400	80 - 120	1,2
	Medium carbon, C < 0,55%	< 200	< 700	70 - 110	1,1
	High carbon, C < 0,85%	< 250	< 850	60 - 100	1,0
	Low alloy	< 250	< 850	60 - 100	1,0
	High alloy	< 350	< 1200	40 - 60	0,9
	Hardened, HRC < 45			30 - 50	0,8
	Hardened, HRC < 55			20 - 30	0,7
	Hardened, HRC < 65			15 - 25	0,6
	Lamellar graphite	< 150	< 500	70 - 110	1,2
	Lamellar graphite	< 300	< 1000	60 - 100	1,1
Cast iron	Nodular graphite, malleable	< 200	< 700	50 - 80	1,0
	Nodular graphite, malleable	< 300	< 1000	40 - 70	0,9
	Free machining	< 250	< 850	40 - 55	1,0
	Austenitic	< 250	< 850	30 - 45	0,9
Stainless steel	Ferritic and austenitic	< 300	< 1000	25 - 40	0,8
	Unalloyed	< 200	< 700	35 - 50	0,8
	Alloyed	< 270	< 900	25 - 40	0,7
Titanium	Alloyed	< 350	< 1250	20 - 35	0,6
	Unalloyed	< 150	< 500	40 - 55	0,8
	Alloyed	< 270	< 900	25 - 35	0,7
Nickel	Alloyed	< 350	< 1250	20 - 30	0,6
	Unalloyed	< 150	< 500	40 - 55	0,8
	Alloyed	< 270	< 900	25 - 35	0,7
Copper	Unalloyed	< 100	< 350	80 - 160	1,0
	Brass, bronze	< 200	< 700	70 - 150	1,0
	High strength bronze	< 470	< 1500	50 - 70	0,8
Aluminium	Unalloyed	< 100	< 350	200 - 300	1,4
	Alloyed, Si < 0,5%	< 150	< 500	150 - 250	1,3
	Alloyed, Si < 10%	< 120	< 400	100 - 200	1,2
	Alloyed, Si > 10%	< 120	< 400	80 - 160	1,1
Inconel	718	< 370		20 - 30	0,6
Graphite				100 - 200	1,0

■ 20% higher cutting speed is recommended for drill with internal coolant.

Code Key

DK 10 091 B 61 FC

type of drill

drill diameter

max. drill depth

shank dimension

cutting edges

carbide grade

D = without coolant
DK = with coolant

possible with chip removal

B = two flute

Diameter Factor (F_d)

D	Diameter Factor (F_d)		
	3xD	5xD	8xD
3,0	0,12	0,10	0,08
4,0	0,14	0,11	0,10
5,0	0,17	0,14	0,12
6,0	0,20	0,16	0,14
8,0	0,26	0,21	0,18
10,0	0,34	0,27	0,24
12,0	0,38	0,30	0,27
14,0	0,41	0,33	0,29
16,0	0,44	0,35	0,31
18,0	0,46	0,37	0,32
20,0	0,50	0,40	0,35

Example

Drilling with D10100B47 FC (3xD)

Carbon Steel, up to 700 N/mm²

D = 10,0 mm

$$F_n = 1,1 \times 0,34 = 0,37 \text{ mm/r}$$

$$n = (90 \times 1000) / (\pi \times 10) = 2865 \text{ rpm}$$

$$V_f = 0,37 \times 2865 = 1060 \text{ mm/min}$$

$$F_n = F_m \times F_d$$

$$n = \frac{V_c \times 1000}{\pi \times D}$$

D = drill diameter (mm)

F_n = feed / rev. (mm/r)

n = spindle speed (rpm)

V_c = cutting speed (m/min)

V_f = table feed (mm/min)

$$V_f = F_n \times n$$


FC

Super Micrograin Carbide with TiAlN coating.
Allround Grade with high heat resistance.
Use cutting data according to the tables.

Carbide Grades

3xD, 5xD

DIN 6537
FC
 TiAlN coated
 Super Micrograin Carbide
Tolerance
 D m7
Shank
 Cylindrical h6, DIN 6535 HA
Flute
 30° right hand spiral
 140° point angle
Field of application
 All types of steel

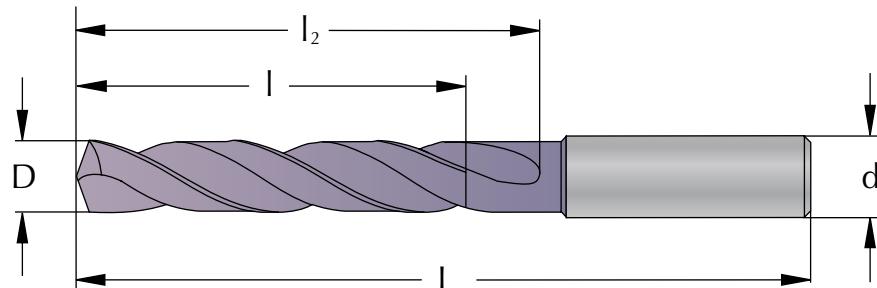

D mm	d mm	Part Number	Type	l mm	l ₂ mm	L mm
3,0	6	D06030B20_FC	3xD	14	20	62
3,0	6	D06030B28_FC	5xD	23	28	66
3,1	6	D06031B20_FC	3xD	14	20	62
3,1	6	D06031B28_FC	5xD	23	28	66
3,2	6	D06032B20_FC	3xD	14	20	62
3,2	6	D06032B28_FC	5xD	23	28	66
3,3	6	D06033B20_FC	3xD	14	20	62
3,3	6	D06033B28_FC	5xD	23	28	66
3,4	6	D06034B20_FC	3xD	14	20	62
3,4	6	D06034B28_FC	5xD	23	28	66
3,5	6	D06035B20_FC	3xD	14	20	62
3,5	6	D06035B28_FC	5xD	23	28	66
3,6	6	D06036B20_FC	3xD	14	20	62
3,6	6	D06036B28_FC	5xD	23	28	66
3,7	6	D06037B20_FC	3xD	14	20	62
3,7	6	D06037B28_FC	5xD	23	28	66
3,8	6	D06038B24_FC	3xD	17	24	66
3,8	6	D06038B36_FC	5xD	29	36	74
3,9	6	D06039B24_FC	3xD	17	24	66
3,9	6	D06039B36_FC	5xD	29	36	74
4,0	6	D06040B24_FC	3xD	17	24	66
4,0	6	D06040B36_FC	5xD	29	36	74
4,1	6	D06041B24_FC	3xD	17	24	66
4,1	6	D06041B36_FC	5xD	29	36	74
4,2	6	D06042B24_FC	3xD	17	24	66
4,2	6	D06042B36_FC	5xD	29	36	74
4,3	6	D06043B24_FC	3xD	17	24	66
4,3	6	D06043B36_FC	5xD	29	36	74
4,4	6	D06044B24_FC	3xD	17	24	66
4,4	6	D06044B36_FC	5xD	29	36	74
4,5	6	D06045B24_FC	3xD	17	24	66
4,5	6	D06045B36_FC	5xD	29	36	74
4,6	6	D06046B24_FC	3xD	17	24	66
4,6	6	D06046B36_FC	5xD	29	36	74
4,7	6	D06047B24_FC	3xD	17	24	66
4,7	6	D06047B36_FC	5xD	29	36	74
4,8	6	D06048B28_FC	3xD	20	28	66
4,8	6	D06048B44_FC	5xD	35	44	82
4,9	6	D06049B28_FC	3xD	20	28	66
4,9	6	D06049B44_FC	5xD	35	44	82
5,0	6	D06050B28_FC	3xD	20	28	66
5,0	6	D06050B44_FC	5xD	35	44	82
5,1	6	D06051B28_FC	3xD	20	28	66
5,1	6	D06051B44_FC	5xD	35	44	82
5,2	6	D06052B28_FC	3xD	20	28	66
5,2	6	D06052B44_FC	5xD	35	44	82
5,3	6	D06053B28_FC	3xD	20	28	66

3xD, 5xD

D mm	d mm	Part Number	Type	l mm	l ₂ mm	L mm
5,3	6	D06053B44_FC	5xD	35	44	82
5,4	6	D06054B28_FC	3xD	20	28	66
5,4	6	D06054B44_FC	5xD	35	44	82
5,5	6	D06055B28_FC	3xD	20	28	66
5,5	6	D06055B44_FC	5xD	35	44	82
5,6	6	D06056B28_FC	3xD	20	28	66
5,6	6	D06056B44_FC	5xD	35	44	82
5,7	6	D06057B28_FC	3xD	20	28	66
5,7	6	D06057B44_FC	5xD	35	44	82
5,8	6	D06058B28_FC	3xD	20	28	66
5,8	6	D06058B44_FC	5xD	35	44	82
5,9	6	D06059B28_FC	3xD	20	28	66
5,9	6	D06059B44_FC	5xD	35	44	82
6,0	6	D06060B28_FC	3xD	20	28	66
6,0	6	D06060B44_FC	5xD	35	44	82
6,1	8	D08061B34_FC	3xD	24	34	79
6,1	8	D08061B53_FC	5xD	43	53	91
6,2	8	D08062B34_FC	3xD	24	34	79
6,2	8	D08062B53_FC	5xD	43	53	91
6,3	8	D08063B34_FC	3xD	24	34	79
6,3	8	D08063B53_FC	5xD	43	53	91
6,4	8	D08064B34_FC	3xD	24	34	79
6,4	8	D08064B53_FC	5xD	43	53	91
6,5	8	D08065B34_FC	3xD	24	34	79
6,5	8	D08065B53_FC	5xD	43	53	91
6,6	8	D08066B34_FC	3xD	24	34	79
6,6	8	D08066B53_FC	5xD	43	53	91
6,7	8	D08067B34_FC	3xD	24	34	79
6,7	8	D08067B53_FC	5xD	43	53	91
6,8	8	D08068B34_FC	3xD	24	34	79
6,8	8	D08068B53_FC	5xD	43	53	91
6,9	8	D08069B34_FC	3xD	24	34	79
6,9	8	D08069B53_FC	5xD	43	53	91
7,0	8	D08070B34_FC	3xD	24	34	79
7,0	8	D08070B53_FC	5xD	43	53	91
7,1	8	D08071B41_FC	3xD	29	41	79
7,1	8	D08071B53_FC	5xD	43	53	91
7,2	8	D08072B41_FC	3xD	29	41	79
7,2	8	D08072B53_FC	5xD	43	53	91
7,3	8	D08073B41_FC	3xD	29	41	79
7,3	8	D08073B53_FC	5xD	43	53	91
7,4	8	D08074B41_FC	3xD	29	41	79
7,4	8	D08074B53_FC	5xD	43	53	91
7,5	8	D08075B41_FC	3xD	29	41	79
7,5	8	D08075B53_FC	5xD	43	53	91
7,6	8	D08076B41_FC	3xD	29	41	79
7,6	8	D08076B53_FC	5xD	43	53	91
7,7	8	D08077B41_FC	3xD	29	41	79
7,7	8	D08077B53_FC	5xD	43	53	91
7,8	8	D08078B41_FC	3xD	29	41	79
7,8	8	D08078B53_FC	5xD	43	53	91
7,9	8	D08079B41_FC	3xD	29	41	79
7,9	8	D08079B53_FC	5xD	43	53	91
8,0	8	D08080B41_FC	3xD	29	41	79
8,0	8	D08080B53_FC	5xD	43	53	91
8,1	10	D10081B47_FC	3xD	35	47	89
8,1	10	D10081B61_FC	5xD	49	61	103
8,2	10	D10082B47_FC	3xD	35	47	89
8,2	10	D10082B61_FC	5xD	49	61	103
8,3	10	D10083B47_FC	3xD	35	47	89
8,3	10	D10083B61_FC	5xD	49	61	103


3xD, 5xD

D mm	d mm	Part Number	Type	l mm	l ₂ mm	L mm
8,4	10	D10084B47_FC	3xD	35	47	89
8,4	10	D10084B61_FC	5xD	49	61	103
8,5	10	D10085B47_FC	3xD	35	47	89
8,5	10	D10085B61_FC	5xD	49	61	103
8,6	10	D10086B47_FC	3xD	35	47	89
8,6	10	D10086B61_FC	5xD	49	61	103
8,7	10	D10087B47_FC	3xD	35	47	89
8,7	10	D10087B61_FC	5xD	49	61	103
8,8	10	D10088B47_FC	3xD	35	47	89
8,8	10	D10088B61_FC	5xD	49	61	103
8,9	10	D10089B47_FC	3xD	35	47	89
8,9	10	D10089B61_FC	5xD	49	61	103
9,0	10	D10090B47_FC	3xD	35	47	89
9,0	10	D10090B61_FC	5xD	49	61	103
9,1	10	D10091B47_FC	3xD	35	47	89
9,1	10	D10091B61_FC	5xD	49	61	103
9,2	10	D10092B47_FC	3xD	35	47	89
9,2	10	D10092B61_FC	5xD	49	61	103
9,3	10	D10093B47_FC	3xD	35	47	89
9,3	10	D10093B61_FC	5xD	49	61	103
9,4	10	D10094B47_FC	3xD	35	47	89
9,4	10	D10094B61_FC	5xD	49	61	103
9,5	10	D10095B47_FC	3xD	35	47	89
9,5	10	D10095B61_FC	5xD	49	61	103
9,6	10	D10096B47_FC	3xD	35	47	89
9,6	10	D10096B61_FC	5xD	49	61	103
9,7	10	D10097B47_FC	3xD	35	47	89
9,7	10	D10097B61_FC	5xD	49	61	103
9,8	10	D10098B47_FC	3xD	35	47	89
9,8	10	D10098B61_FC	5xD	49	61	103
9,9	10	D10099B47_FC	3xD	35	47	89
9,9	10	D10099B61_FC	5xD	49	61	103
10,0	10	D10100B47_FC	3xD	35	47	89
10,0	10	D10100B61_FC	5xD	49	61	103
10,1	12	D12101B55_FC	3xD	40	55	102
10,1	12	D12101B71_FC	5xD	56	71	118
10,2	12	D12102B55_FC	3xD	40	55	102
10,2	12	D12102B71_FC	5xD	56	71	118
10,3	12	D12103B55_FC	3xD	40	55	102
10,3	12	D12103B71_FC	5xD	56	71	118
10,4	12	D12104B55_FC	3xD	40	55	102
10,4	12	D12104B71_FC	5xD	56	71	118
10,5	12	D12105B55_FC	3xD	40	55	102
10,5	12	D12105B71_FC	5xD	56	71	118
10,6	12	D12106B55_FC	3xD	40	55	102
10,6	12	D12106B71_FC	5xD	56	71	118
10,7	12	D12107B55_FC	3xD	40	55	102
10,7	12	D12107B71_FC	5xD	56	71	118
10,8	12	D12108B55_FC	3xD	40	55	102
10,8	12	D12108B71_FC	5xD	56	71	118
10,9	12	D12109B55_FC	3xD	40	55	102
10,9	12	D12109B71_FC	5xD	56	71	118
11,0	12	D12110B55_FC	3xD	40	55	102
11,0	12	D12110B71_FC	5xD	56	71	118
11,1	12	D12111B55_FC	3xD	40	55	102
11,1	12	D12111B71_FC	5xD	56	71	118
11,2	12	D12112B55_FC	3xD	40	55	102
11,2	12	D12112B71_FC	5xD	56	71	118
11,3	12	D12113B55_FC	3xD	40	55	102
11,3	12	D12113B71_FC	5xD	56	71	118
11,4	12	D12114B55_FC	3xD	40	55	102

D mm	d mm	Part Number	Type	l mm	l ₂ mm	L mm
11,4	12	D12114B71_FC	5xD	56	71	118
11,5	12	D12115B55_FC	3xD	40	55	102
11,5	12	D12115B71_FC	5xD	56	71	118
11,6	12	D12116B55_FC	3xD	40	55	102
11,6	12	D12116B71_FC	5xD	56	71	118
11,7	12	D12117B55_FC	3xD	40	55	102
11,7	12	D12117B71_FC	5xD	56	71	118
11,8	12	D12118B55_FC	3xD	40	55	102
11,8	12	D12118B71_FC	5xD	56	71	118
11,9	12	D12119B55_FC	3xD	40	55	102
11,9	12	D12119B71_FC	5xD	56	71	118
12,0	12	D12120B55_FC	3xD	40	55	102
12,0	12	D12120B71_FC	5xD	56	71	118
12,5	14	D14125B60_FC	3xD	43	60	107
12,5	14	D14125B77_FC	5xD	60	77	124
13,0	14	D14130B60_FC	3xD	43	60	107
13,0	14	D14130B77_FC	5xD	60	77	124
13,5	14	D14135B60_FC	3xD	43	60	107
13,5	14	D14135B77_FC	5xD	60	77	124
14,0	14	D14140B60_FC	3xD	43	60	107
14,0	14	D14140B77_FC	5xD	60	77	124
14,5	16	D16145B65_FC	3xD	45	65	115
14,5	16	D16145B83_FC	5xD	63	83	133
15,0	16	D16150B65_FC	3xD	45	65	115
15,0	16	D16150B83_FC	5xD	63	83	133
15,5	16	D16155B65_FC	3xD	45	65	115
15,5	16	D16155B83_FC	5xD	63	83	133
16,0	16	D16160B65_FC	3xD	45	65	115
16,0	16	D16160B83_FC	5xD	63	83	133
16,5	18	D18165B73_FC	3xD	51	73	123
16,5	18	D18165B93_FC	5xD	71	93	143
17,0	18	D18170B73_FC	3xD	51	73	123
17,0	18	D18170B93_FC	5xD	71	93	143
17,5	18	D18175B73_FC	3xD	51	73	123
17,5	18	D18175B93_FC	5xD	71	93	143
18,0	18	D18180B73_FC	3xD	51	73	123
18,0	18	D18180B93_FC	5xD	71	93	143
18,5	20	D20185B79_FC	3xD	55	79	131
18,5	20	D20185B101_FC	5xD	77	101	153
19,0	20	D20190B79_FC	3xD	55	79	131
19,0	20	D20190B101_FC	5xD	77	101	153
19,5	20	D20195B79_FC	3xD	55	79	131
19,5	20	D20195B101_FC	5xD	77	101	153
20,0	20	D20200B79_FC	3xD	55	79	131
20,0	20	D20200B101_FC	5xD	77	101	153

with Internal Coolant, 3xD, 5xD, 8xD

DIN 6537
FC
 TiAlN coated
 Super Micrograin Carbide
Tolerance
 D m7
Shank
 Cylindricalt h6, DIN 6535 HA
Flute
 30° right hand spiral
 140° point angle
Field of application
 All types of steel

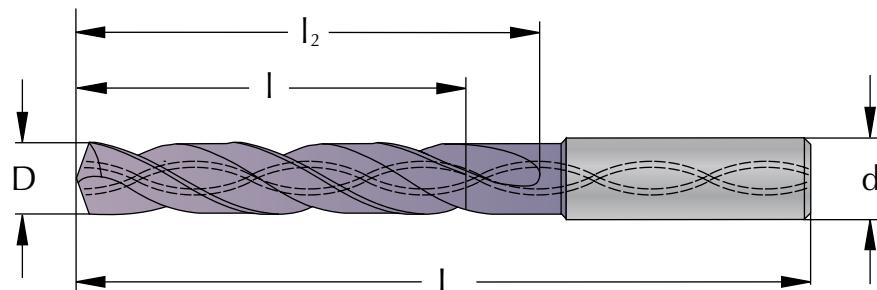

D mm	d mm	Part Number	Type	l mm	l ₂ mm	L mm
3,0	6	DK06030B20_FC	3xD	14	20	62
3,0	6	DK06030B28_FC	5xD	23	28	66
3,0	6	DK06030B50_FC	8xD	38	50	95
3,1	6	DK06031B20_FC	3xD	14	20	62
3,1	6	DK06031B28_FC	5xD	23	28	66
3,2	6	DK06032B20_FC	3xD	14	20	62
3,2	6	DK06032B28_FC	5xD	23	28	66
3,3	6	DK06033B20_FC	3xD	14	20	62
3,3	6	DK06033B28_FC	5xD	23	28	66
3,4	6	DK06034B20_FC	3xD	14	20	62
3,4	6	DK06034B28_FC	5xD	23	28	66
3,5	6	DK06035B20_FC	3xD	14	20	62
3,5	6	DK06035B28_FC	5xD	23	28	66
3,5	6	DK06035B50_FC	8xD	38	50	95
3,6	6	DK06036B20_FC	3xD	14	20	62
3,6	6	DK06036B28_FC	5xD	23	28	66
3,7	6	DK06037B20_FC	3xD	14	20	62
3,7	6	DK06037B28_FC	5xD	23	28	66
3,8	6	DK06038B24_FC	3xD	17	24	66
3,8	6	DK06038B36_FC	5xD	29	36	74
3,9	6	DK06039B24_FC	3xD	17	24	66
3,9	6	DK06039B36_FC	5xD	29	36	74
4,0	6	DK06040B24_FC	3xD	17	24	66
4,0	6	DK06040B36_FC	5xD	29	36	74
4,0	6	DK06040B50_FC	8xD	38	50	95
4,1	6	DK06041B24_FC	3xD	17	24	66
4,1	6	DK06041B36_FC	5xD	29	36	74
4,2	6	DK06042B24_FC	3xD	17	24	66
4,2	6	DK06042B36_FC	5xD	29	36	74
4,3	6	DK06043B24_FC	3xD	17	24	66
4,3	6	DK06043B36_FC	5xD	29	36	74
4,4	6	DK06044B24_FC	3xD	17	24	66
4,4	6	DK06044B36_FC	5xD	29	36	74
4,5	6	DK06045B24_FC	3xD	17	24	66
4,5	6	DK06045B36_FC	5xD	29	36	74
4,5	6	DK06045B50_FC	8xD	38	50	95
4,6	6	DK06046B24_FC	3xD	17	24	66
4,6	6	DK06046B36_FC	5xD	29	36	74
4,7	6	DK06047B24_FC	3xD	17	24	66
4,7	6	DK06047B36_FC	5xD	29	36	74
4,8	6	DK06048B28_FC	3xD	20	28	66
4,8	6	DK06048B44_FC	5xD	35	44	82
4,9	6	DK06049B28_FC	3xD	20	28	66
4,9	6	DK06049B44_FC	5xD	35	44	82
5,0	6	DK06050B28_FC	3xD	20	28	66
5,0	6	DK06050B44_FC	5xD	35	44	82
5,0	6	DK06050B50_FC	8xD	38	50	95

D mm	d mm	Part Number	Type	l mm	l ₂ mm	L mm
5,1	6	DK06051B28_FC	3xD	20	28	66
5,1	6	DK06051B44_FC	5xD	35	44	82
5,2	6	DK06052B28_FC	3xD	20	28	66
5,2	6	DK06052B44_FC	5xD	35	44	82
5,3	6	DK06053B28_FC	3xD	20	28	66
5,3	6	DK06053B44_FC	5xD	35	44	82
5,4	6	DK06054B28_FC	3xD	20	28	66
5,4	6	DK06054B44_FC	5xD	35	44	82
5,5	6	DK06055B28_FC	3xD	20	28	66
5,5	6	DK06055B44_FC	5xD	35	44	82
5,5	6	DK06055B50_FC	8xD	38	50	95
5,6	6	DK06056B28_FC	3xD	20	28	66
5,6	6	DK06056B44_FC	5xD	35	44	82
5,7	6	DK06057B28_FC	3xD	20	28	66
5,7	6	DK06057B44_FC	5xD	35	44	82
5,8	6	DK06058B28_FC	3xD	20	28	66
5,8	6	DK06058B44_FC	5xD	35	44	82
5,9	6	DK06059B28_FC	3xD	20	28	66
5,9	6	DK06059B44_FC	5xD	35	44	82
6,0	6	DK06060B28_FC	3xD	20	28	66
6,0	6	DK06060B44_FC	5xD	35	44	82
6,0	6	DK06060B50_FC	8xD	38	50	95
6,1	8	DK08061B34_FC	3xD	24	34	79
6,1	8	DK08061B53_FC	5xD	43	53	91
6,2	8	DK08062B34_FC	3xD	24	34	79
6,2	8	DK08062B53_FC	5xD	43	53	91
6,3	8	DK08063B34_FC	3xD	24	34	79
6,3	8	DK08063B53_FC	5xD	43	53	91
6,4	8	DK08064B34_FC	3xD	24	34	79
6,4	8	DK08064B53_FC	5xD	43	53	91
6,5	8	DK08065B34_FC	3xD	24	34	79
6,5	8	DK08065B53_FC	5xD	43	53	91
6,5	8	DK08065B66_FC	8xD	50	66	114
6,6	8	DK08066B34_FC	3xD	24	34	79
6,6	8	DK08066B53_FC	5xD	43	53	91
6,7	8	DK08067B34_FC	3xD	24	34	79
6,7	8	DK08067B53_FC	5xD	43	53	91
6,8	8	DK08068B34_FC	3xD	24	34	79
6,8	8	DK08068B53_FC	5xD	43	53	91
6,9	8	DK08069B34_FC	3xD	24	34	79
6,9	8	DK08069B53_FC	5xD	43	53	91
7,0	8	DK08070B34_FC	3xD	24	34	79
7,0	8	DK08070B53_FC	5xD	43	53	91
7,0	8	DK08070B76_FC	8xD	60	76	114
7,1	8	DK08071B41_FC	3xD	29	41	79
7,1	8	DK08071B53_FC	5xD	43	53	91
7,2	8	DK08072B41_FC	3xD	29	41	79
7,2	8	DK08072B53_FC	5xD	43	53	91
7,3	8	DK08073B41_FC	3xD	29	41	79
7,3	8	DK08073B53_FC	5xD	43	53	91
7,4	8	DK08074B41_FC	3xD	29	41	79
7,4	8	DK08074B53_FC	5xD	43	53	91
7,5	8	DK08075B41_FC	3xD	29	41	79
7,5	8	DK08075B53_FC	5xD	43	53	91
7,5	8	DK08075B76_FC	8xD	60	76	114
7,6	8	DK08076B41_FC	3xD	29	41	79
7,6	8	DK08076B53_FC	5xD	43	53	91
7,7	8	DK08077B41_FC	3xD	29	41	79
7,7	8	DK08077B53_FC	5xD	43	53	91
7,8	8	DK08078B41_FC	3xD	29	41	79
7,8	8	DK08078B53_FC	5xD	43	53	91


with Internal Coolant, 3xD, 5xD, 8xD

D mm	d mm	Part Number	Type	l mm	l ₂ mm	L mm
7,9	8	DK08079B41_FC	3xD	29	41	79
7,9	8	DK08079B53_FC	5xD	43	53	91
8,0	8	DK08080B41_FC	3xD	29	41	79
8,0	8	DK08080B53_FC	5xD	43	53	91
8,0	8	DK08080B76_FC	8xD	60	76	114
8,1	10	DK10081B47_FC	3xD	35	47	89
8,1	10	DK10081B61_FC	5xD	49	61	103
8,2	10	DK10082B47_FC	3xD	35	47	89
8,2	10	DK10082B61_FC	5xD	49	61	103
8,3	10	DK10083B47_FC	3xD	35	47	89
8,3	10	DK10083B61_FC	5xD	49	61	103
8,4	10	DK10084B47_FC	3xD	35	47	89
8,4	10	DK10084B61_FC	5xD	49	61	103
8,5	10	DK10085B47_FC	3xD	35	47	89
8,5	10	DK10085B61_FC	5xD	49	61	103
8,5	10	DK10085B87_FC	8xD	68	87	142
8,6	10	DK10086B47_FC	3xD	35	47	89
8,6	10	DK10086B61_FC	5xD	49	61	103
8,7	10	DK10087B47_FC	3xD	35	47	89
8,7	10	DK10087B61_FC	5xD	49	61	103
8,8	10	DK10088B47_FC	3xD	35	47	89
8,8	10	DK10088B61_FC	5xD	49	61	103
8,9	10	DK10089B47_FC	3xD	35	47	89
8,9	10	DK10089B61_FC	5xD	49	61	103
9,0	10	DK10090B47_FC	3xD	35	47	89
9,0	10	DK10090B61_FC	5xD	49	61	103
9,0	10	DK10090B87_FC	8xD	68	87	142
9,1	10	DK10091B47_FC	3xD	35	47	89
9,1	10	DK10091B61_FC	5xD	49	61	103
9,2	10	DK10092B47_FC	3xD	35	47	89
9,2	10	DK10092B61_FC	5xD	49	61	103
9,3	10	DK10093B47_FC	3xD	35	47	89
9,3	10	DK10093B61_FC	5xD	49	61	103
9,4	10	DK10094B47_FC	3xD	35	47	89
9,4	10	DK10094B61_FC	5xD	49	61	103
9,5	10	DK10095B47_FC	3xD	35	47	89
9,5	10	DK10095B61_FC	5xD	49	61	103
9,5	10	DK10095B95_FC	8xD	76	95	142
9,6	10	DK10096B47_FC	3xD	35	47	89
9,6	10	DK10096B61_FC	5xD	49	61	103
9,7	10	DK10097B47_FC	3xD	35	47	89
9,7	10	DK10097B61_FC	5xD	49	61	103
9,8	10	DK10098B47_FC	3xD	35	47	89
9,8	10	DK10098B61_FC	5xD	49	61	103
9,9	10	DK10099B47_FC	3xD	35	47	89
9,9	10	DK10099B61_FC	5xD	49	61	103
10,0	10	DK10100B47_FC	3xD	35	47	89
10,0	10	DK10100B61_FC	5xD	49	61	103
10,0	10	DK10100B95_FC	8xD	76	95	142
10,1	12	DK12101B55_FC	3xD	40	55	102
10,1	12	DK12101B71_FC	5xD	56	71	118
10,2	12	DK12102B55_FC	3xD	40	55	102
10,2	12	DK12102B71_FC	5xD	56	71	118
10,3	12	DK12103B55_FC	3xD	40	55	102
10,3	12	DK12103B71_FC	5xD	56	71	118
10,4	12	DK12104B55_FC	3xD	40	55	102
10,4	12	DK12104B71_FC	5xD	56	71	118
10,5	12	DK12105B55_FC	3xD	40	55	102
10,5	12	DK12105B71_FC	5xD	56	71	118
10,5	12	DK12105B106_FC	8xD	82	106	162
10,6	12	DK12106B55_FC	3xD	40	55	102

D mm	d mm	Part Number	Type	l mm	l ₂ mm	L mm
10,6	12	DK12106B71_FC	5xD	56	71	118
10,7	12	DK12107B55_FC	3xD	40	55	102
10,7	12	DK12107B71_FC	5xD	56	71	118
10,8	12	DK12108B55_FC	3xD	40	55	102
10,8	12	DK12108B71_FC	5xD	56	71	118
10,9	12	DK12109B55_FC	3xD	40	55	102
10,9	12	DK12109B71_FC	5xD	56	71	118
11,0	12	DK12110B55_FC	3xD	40	55	102
11,0	12	DK12110B71_FC	5xD	56	71	118
11,0	12	DK12110B106_FC	8xD	82	106	162
11,1	12	DK12111B55_FC	3xD	40	55	102
11,1	12	DK12111B71_FC	5xD	56	71	118
11,2	12	DK12112B55_FC	3xD	40	55	102
11,2	12	DK12112B71_FC	5xD	56	71	118
11,3	12	DK12113B55_FC	3xD	40	55	102
11,3	12	DK12113B71_FC	5xD	56	71	118
11,4	12	DK12114B55_FC	3xD	40	55	102
11,4	12	DK12114B71_FC	5xD	56	71	118
11,5	12	DK12115B55_FC	3xD	40	55	102
11,5	12	DK12115B71_FC	5xD	56	71	118
11,5	12	DK12115B114_FC	8xD	90	114	162
11,6	12	DK12116B55_FC	3xD	40	55	102
11,6	12	DK12116B71_FC	5xD	56	71	118
11,7	12	DK12117B55_FC	3xD	40	55	102
11,7	12	DK12117B71_FC	5xD	56	71	118
11,8	12	DK12118B55_FC	3xD	40	55	102
11,8	12	DK12118B71_FC	5xD	56	71	118
11,9	12	DK12119B55_FC	3xD	40	55	102
11,9	12	DK12119B71_FC	5xD	56	71	118
12,0	12	DK12120B55_FC	3xD	40	55	102
12,0	12	DK12120B71_FC	5xD	56	71	118
12,0	12	DK12120B114_FC	8xD	90	114	162
12,5	14	DK14125B60_FC	3xD	43	60	107
12,5	14	DK14125B77_FC	5xD	60	77	124
12,5	14	DK14125B133_FC	8xD	125	133	182
13,0	14	DK14130B60_FC	3xD	43	60	107
13,0	14	DK14130B77_FC	5xD	60	77	124
13,0	14	DK14130B133_FC	8xD	125	133	182
13,5	14	DK14135B60_FC	3xD	43	60	107
13,5	14	DK14135B77_FC	5xD	60	77	124
13,5	14	DK14135B133_FC	8xD	125	133	182
14,0	14	DK14140B60_FC	3xD	43	60	107
14,0	14	DK14140B77_FC	5xD	60	77	124
14,0	14	DK14140B133_FC	8xD	125	133	182
14,5	16	DK16145B65_FC	3xD	45	65	115
14,5	16	DK16145B83_FC	5xD	63	83	133
14,5	16	DK16145B152_FC	8xD	138	152	204
15,0	16	DK16150B65_FC	3xD	45	65	115
15,0	16	DK16150B83_FC	5xD	63	83	133
15,0	16	DK16150B152_FC	8xD	138	152	204
15,5	16	DK16155B65_FC	3xD	45	65	115
15,5	16	DK16155B83_FC	5xD	63	83	133
15,5	16	DK16155B152_FC	8xD	138	152	204
16,0	16	DK16160B65_FC	3xD	45	65	115
16,0	16	DK16160B83_FC	5xD	63	83	133
16,0	16	DK16160B152_FC	8xD	138	152	204
16,5	18	DK18165B73_FC	3xD	51	73	123
16,5	18	DK18165B93_FC	5xD	71	93	143
17,0	18	DK18170B73_FC	3xD	51	73	123
17,0	18	DK18170B93_FC	5xD	71	93	143
17,5	18	DK18175B73_FC	3xD	51	73	123

with Internal Coolant, 3xD, 5xD, 8xD

D mm	d mm	Part Number	Type	l mm	l ₂ mm	L mm
17,5	18	DK18175B93_FC	5xD	71	93	143
18,0	18	DK18180B73_FC	3xD	51	73	123
18,0	18	DK18180B93_FC	5xD	71	93	143
18,5	20	DK20185B79_FC	3xD	55	79	131
18,5	20	DK20185B101_FC	5xD	77	101	153
19,0	20	DK20190B79_FC	3xD	55	79	131
19,0	20	DK20190B101_FC	5xD	77	101	153
19,5	20	DK20195B79_FC	3xD	55	79	131
19,5	20	DK20195B101_FC	5xD	77	101	153
20,0	20	DK20200B79_FC	3xD	55	79	131
20,0	20	DK20200B101_FC	5xD	77	101	153

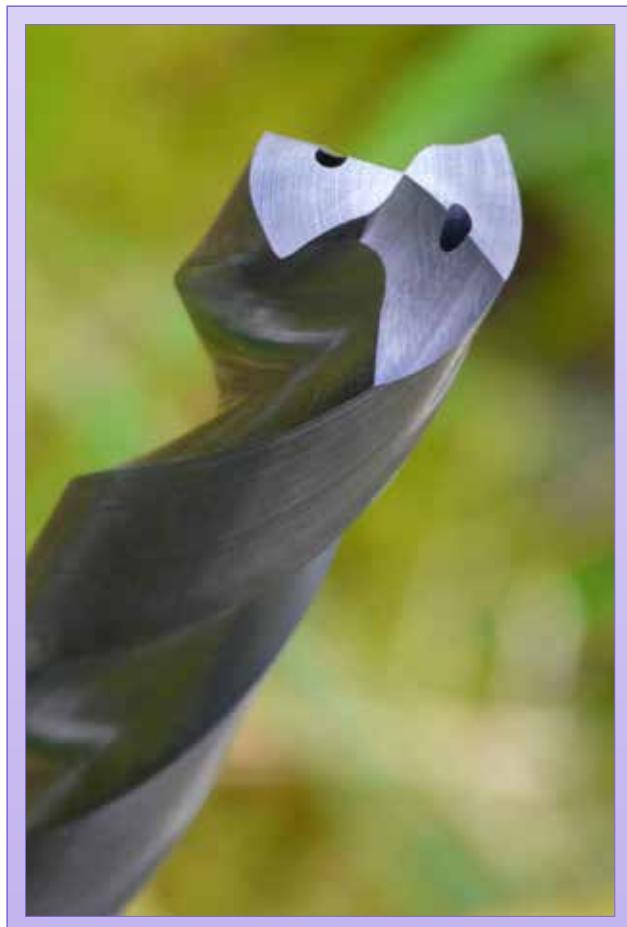


CARBIDE RODS

Round Blanks



KXF
Micrograin Carbide
0,7µ, 10% Cobalt
Tolerance
h6, ground and polished

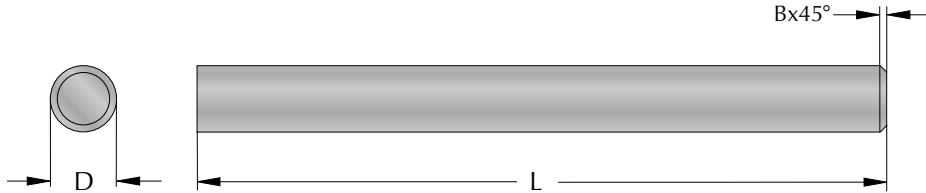


D mm	L mm	B mm	Part Number
3,0	39	0,3	Ø3X39_KXF
3,0	100	0,3	Ø3X100_KXF
3,0	320	0,3	Ø3X320_KXF
4,0	50	0,4	Ø4X50_KXF
4,0	100	0,4	Ø4X100_KXF
4,0	320	0,4	Ø4X320_KXF
5,0	100	0,4	Ø5X100_KXF
5,0	320	0,4	Ø5X320_KXF
6,0	63	0,4	Ø6X63_KXF
6,0	76	0,4	Ø6X76_KXF
6,0	100	0,4	Ø6X100_KXF
6,0	320	0,4	Ø6X320_KXF
8,0	63	0,5	Ø8X63_KXF
8,0	76	0,5	Ø8X76_KXF
8,0	100	0,5	Ø8X100_KXF
8,0	320	0,5	Ø8X320_KXF
10,0	76	0,5	Ø10X76_KXF
10,0	100	0,5	Ø10X100_KXF
10,0	320	0,5	Ø10X320_KXF
12,0	83	0,5	Ø12X83_KXF
12,0	100	0,5	Ø12X100_KXF
12,0	320	0,5	Ø12X320_KXF
14,0	89	0,8	Ø14X89_KXF
14,0	100	0,8	Ø14X100_KXF
14,0	320	0,8	Ø14X320_KXF
16,0	89	0,8	Ø16X89_KXF
16,0	100	0,8	Ø16X100_KXF
16,0	120	0,8	Ø16X120_KXF
16,0	320	0,8	Ø16X320_KXF
18,0	100	0,8	Ø18X100_KXF
18,0	130	0,8	Ø18X130_KFX
18,0	320	0,8	Ø18X320_KXF
20,0	100	1,0	Ø20X100_KXF
20,0	120	1,0	Ø20X120_KXF
20,0	150	1,0	Ø20X150_KXF
20,0	320	1,0	Ø20X320_KXF
25,0	100	1,0	Ø25X100_KXF
25,0	120	1,0	Ø25X120_KXF
25,0	130	1,0	Ø25X130_KXF
25,0	150	1,0	Ø25X150_KXF
25,0	320	1,0	Ø25X320_KXF
32,0	150	1,0	Ø32X150_KXF
32,0	320	1,0	Ø32X320_KXF
40,0	170	1,0	Ø40X170_KXF

CARBIDE RODS

with Internal Coolant


KXF
Micrograin Carbide
0,7µ, 10% Cobalt
Tolerance
h6, ground and polished

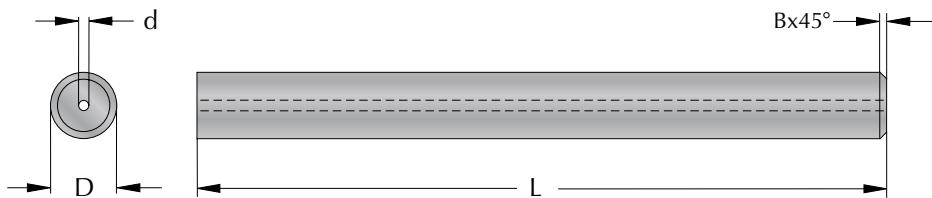

D mm	L mm	d mm	B mm	Part Number
4	50	0,6	0,4	Ø4X50Ø0.6_KXF
6	63	1	0,4	Ø6X63Ø1_KXF
8	76	1,3	0,5	Ø8X76Ø1.3_KXF
10	100	2	0,5	Ø10X100Ø2_KXF
12	100	2	0,5	Ø12X100Ø2_KXF
14	100	2	0,8	Ø14X100Ø2_KXF
16	120	3	0,8	Ø16X120Ø3_KXF
20	150	3	1,0	Ø20X150Ø3_KXF













with Internal Radial Coolant

KXF
Micrograin Carbide
0,7µ, 10% Cobalt
Tolerance
h6, ground and polished

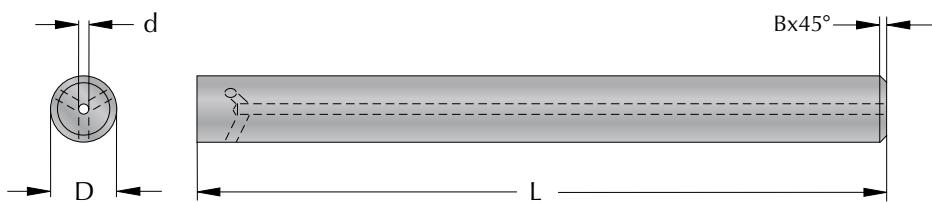

D mm	L mm	d mm	No. of holes	B mm	Part Number
6	76	1	3	0,5	Ø6X76Ø1C_KXF
8	76	1,2	3	1,0	Ø8X76Ø1.2C_KXF
8	76	1,2	4	1,0	Ø8X76Ø1.2D_KXF
10	100	1,2	3	1,0	Ø10X100Ø1.2C_KXF
10	100	1,2	4	1,0	Ø10X100Ø1.2D_KXF
12	100	1,5	4	1,0	Ø12X100Ø1.5D_KXF
16	100	1,5	4	1,5	Ø16X100Ø1.5D_KXF
16	100	1,5	5	1,5	Ø16X100Ø1.5E_KXF

■ SmiCut supply rectangular carbide rods

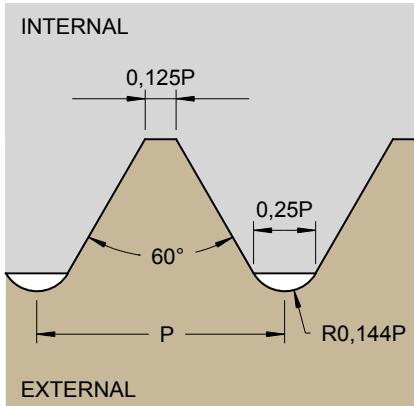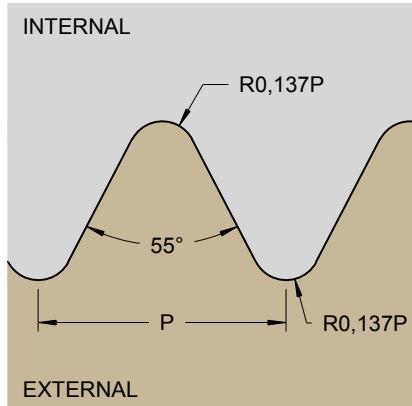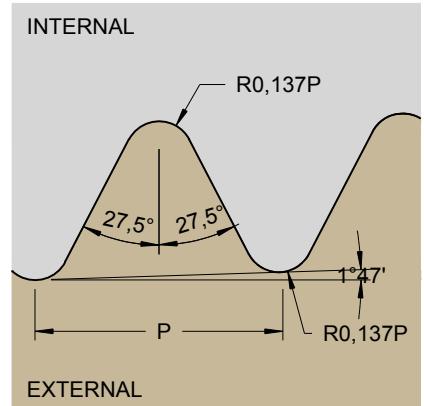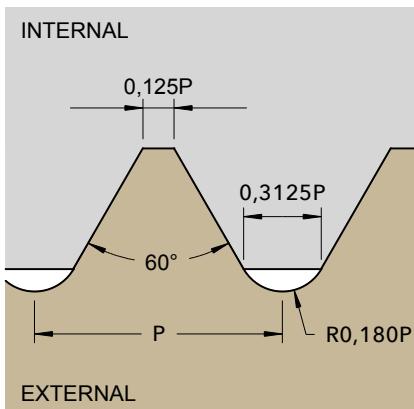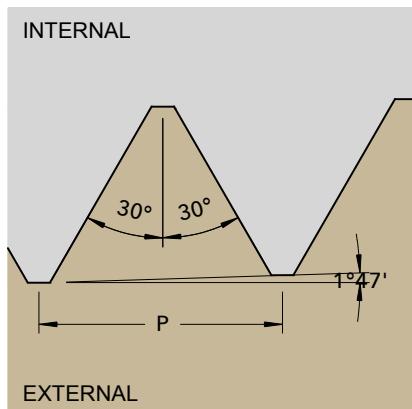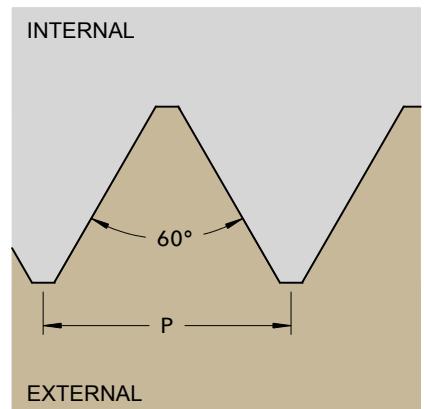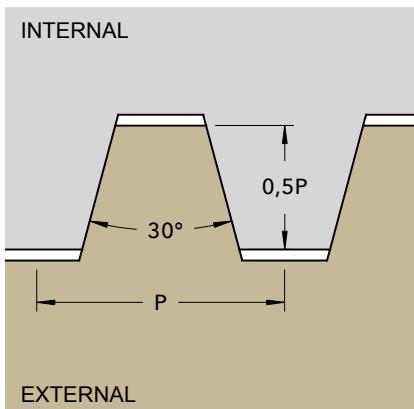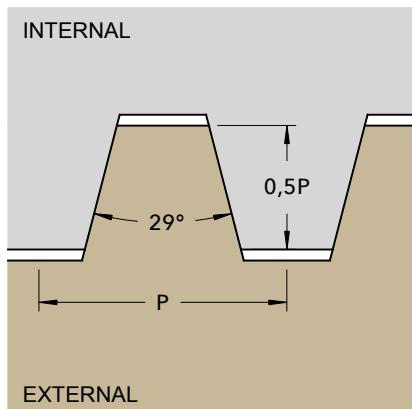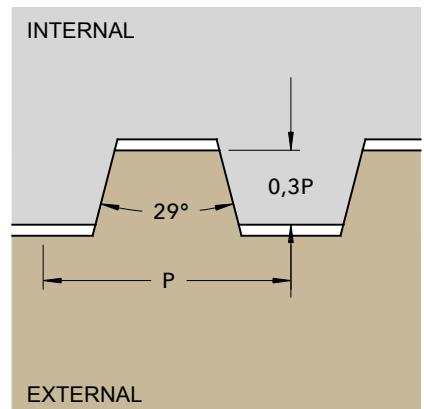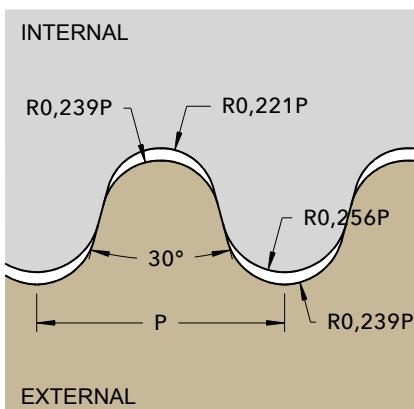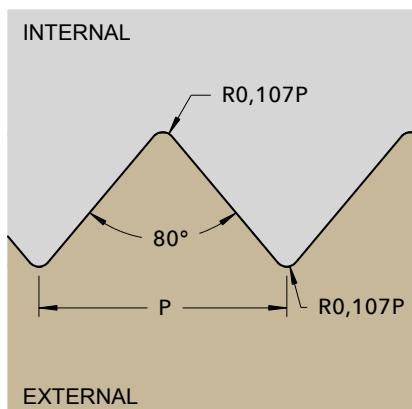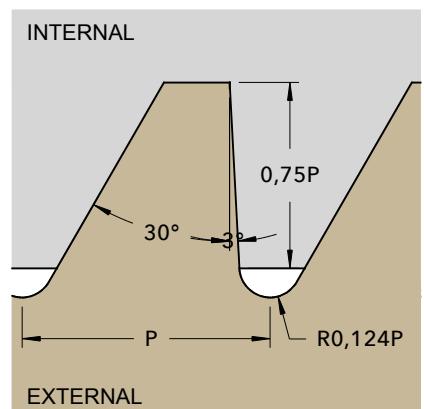ISO (M) and UN**Whitworth (W)****BSPT****MJ and UNJ****NPT and NPTF****NPSF****Trapez DIN 103****ACME****STUB ACME****Round DIN 405****PG DIN 40430****SG DIN 513**



Schmidt Tool Systems - The Master of Threading



SmiCut AB
Fläderstigen 12, SE-771 43 Ludvika
tel. +46 240 182 30, fax +46 240 182 35
info@smicut.se, www.smicut.se