

passion
for precision



Carbide drills | Thread cutting tools






XDrill® carbide drills



- **High-performance carbide drills for machining various types of steel**
Particularly suitable for steels up to Rm 1,500 N/mm²
- **Significantly longer tool life at increased feed rates and higher cutting speeds**
Thanks to high-stability cutting edge geometry, ultra-fine-grain carbide and extremely hard coating
- **DURO-X wear-resistant, nano multi-layer hard coating**
The temperature-resistant coating, specially developed for high-performance machining, ensures outstanding process security
- **Machining time reduced by more than 50%**

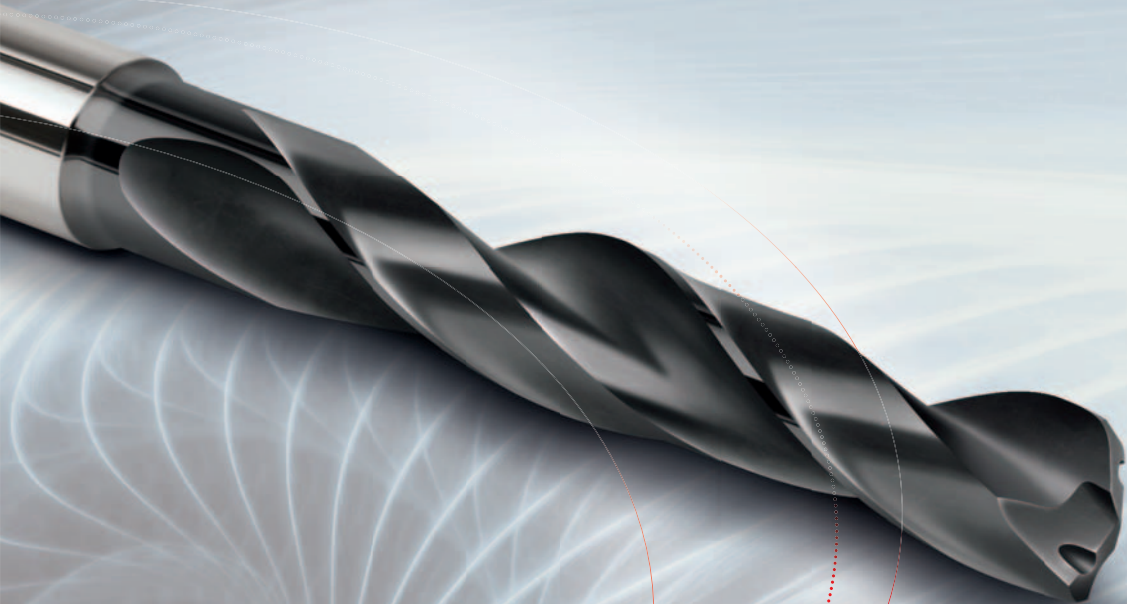


XDRILL®

Supradrill® U carbide drills



- **Universal machining of various types of steel**
Safe, reliable drilling processes in steel and stainless steel
- **Comprehensive range for a broad spectrum of drilling applications**
Basic range consists of 3xd IKZ, 5xd IKZ and 5xd without IKZ
- **Nano-U² high-performance coating**
The outstanding performance coating for all-purpose drilling in steel
- **Greater process security, longer tool life and reduced production costs**
Thanks to our in-house developed coating concepts and dimension-specific cutting edge design

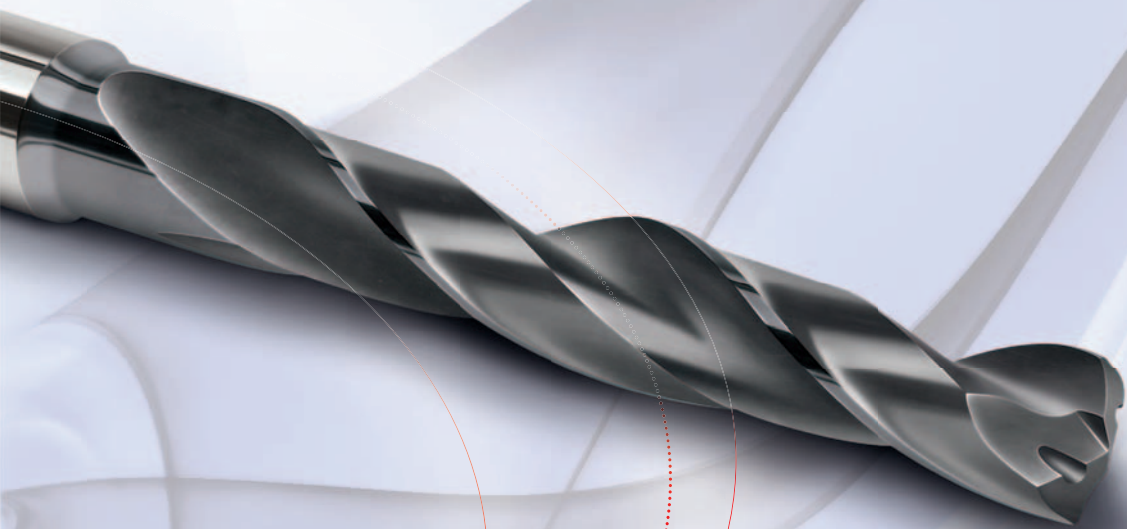


SUPRADRILL® U

x-tap thread cutting tools



- **Thread cutting tools for high-performance tapping of steel and stainless steel**
- **Outstanding process security at low torque and with long tool life**
- **Numerous thread formats available for a broad range of applications**
With a coding system for the safe, reliable selection of tools and application data
- **TRIBO hard coatings**
For reliable tapping in stainless steel

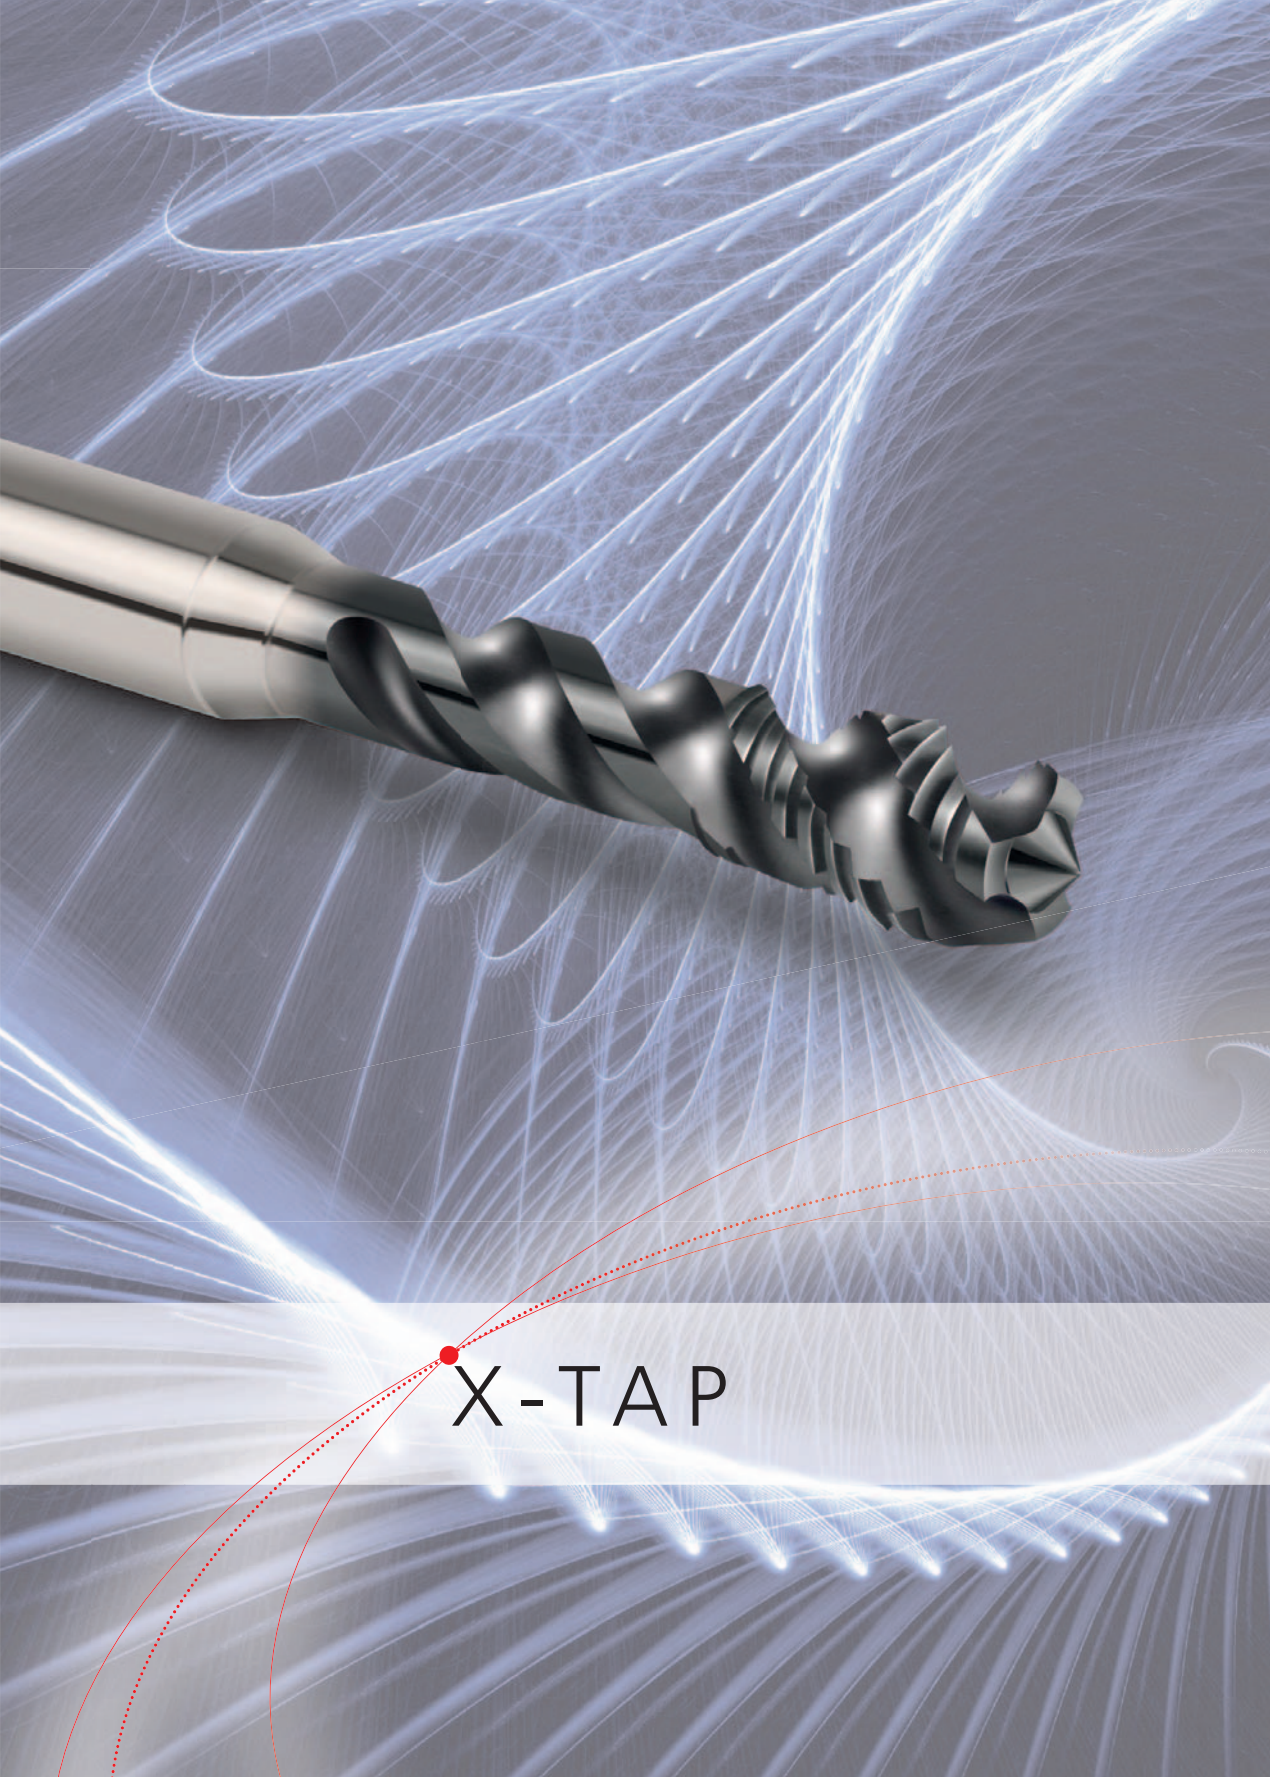


X-TAP

s-tap thread cutting tools



- **The new performance benchmark for universal tapping of steel**
- **Outstanding process security, long tool life and optimisation capability**
Thanks to a new substrate, deburring process, dimension-specific cutting edge conditioning and TiCN high-performance coating
- **Comprehensive metric and pipe thread assortment**
For tapping steel, even in the lower strength range
- **Rigid tapping and length compensation**

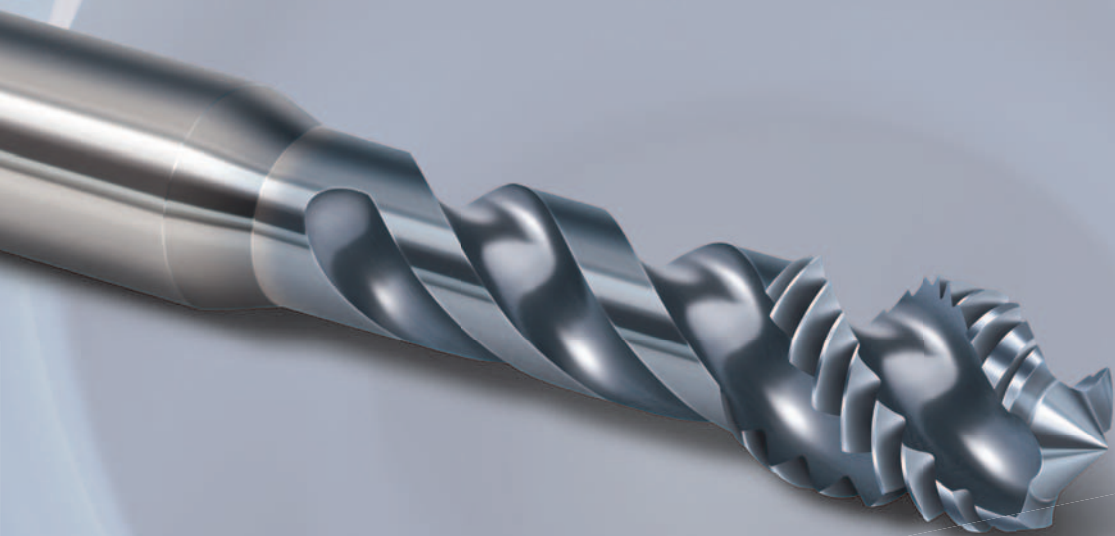

S-TAP

u-tap thread cutting tools




- **Taps for universal use**
- **The use of state-of-the-art technologies makes it possible to tap a variety of different materials**
Suitable for steel, Al wrought alloys, stainless steel
- **Outstanding process security and reduced manufacturing costs**
Through optimal cutting edge design and universal application



U-TAP

Replaces edition 2015/16

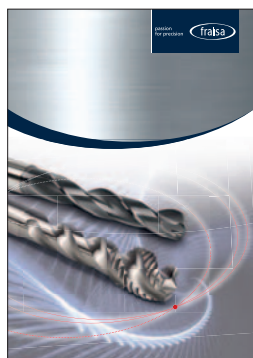

www.fraisa.com



**The raw material surcharges
are included in the price.**

Carbide drills	Drilling tools for steel, aluminium, stainless steel, titanium, CFK, CFK / Metal composite	
	Center drills, Countersinks	15 – 135
Thread cutting tools	Metric coarse thread M / MJ	M 137 – 243
	Metric fine thread MF	MF 245 – 269
	Whitworth pipe thread cylindrical G	G 271 – 301
	Unified thread UNC / UNJC / UNF / UNJF	UN 303 – 335
	Unified pipe thread conical NPT / NPTF	NPT NPTF 337 – 343
	Metric coarse thread for inserts EG M	EG 345 – 349
	Cold Forming M / MF / EG M	CF 351 – 385
	Thread Milling M / MF / G / UNC / UNF / UN / NPT / NPTF	TM 387 – 421
	Information Symbols / Formulas / Abbreviations	i 423 – 453
	INDEX	INDEX 455 – 460



Drilling tools for steel, aluminium, stainless steel and titanium

Spiral flute drills

5xd

N° B72015

XDrill®



HM
MGX



Rm
<850-1500

21

N° B62015 / B63015

Supradrill® U



HM
MG10



Rm
<850-1100

Inox
Stainless

37

N° B62014 / B63014

Supradrill® U



HM
MG10



Rm
<850-1100

55

3xd

N° B72011

XDrill®



HM
MGX



Rm
<850-1500

65

N° B52111 / B53111

Supradrill® HX



HM
XA



HRC
48 - >60

75

N° B62011 / B63011

Supradrill® U



HM
MG10



Rm
<850-1100

Inox
Stainless

81

8xd

N° B72020

XDrill®



HM
MGX



Rm
<850-1300

85

N° B52020 / B53020

Supradrill® N



HM
MG10



Rm
<850-1100

95

Drilling tools for steel, aluminium, stainless steel and titanium

Deep hole drills

15xd						
N° B52915		HM MGD ²		Rm <850-1100		99
20xd						
N° B52920		HM MGD ²		Rm <850-1100		101
25xd						
N° B52925		HM MGD ²		Rm <850-1100		103
30xd						
N° B52930		HM MGD ²		Rm <850-1100		105

Drilling tools for steel, aluminium, stainless steel and titanium

Micro drills

5xd						
N° B57014	Microdrill NX		HM MG10		Rm <850-1100	107
N° B57015	Microdrill NX		HM MG10		Rm <850-1100 Inox Stainless	113

8xd						
N° B57020	Microdrill NX		HM MG10		Rm <850-1100	117

Step drills

3xd, for core drill sizes for taps						
N° B52801			HM		Rm <850-1100	121

Drilling tools for CFC, CFC / Metal composite

Spiral flute drills

3xd

N° B52710



HM
XA



CFK

123

5xd

N° B52724



HM
MG10



CFK/Ti

CFK/Al

125

Micro drills

3xd

N° B57710



HM
XA



CFK

127


Center drills, Countersinks

Center drills

N° B92040		HM MG10	90°	Rm <850-1100			129
N° B92020		HM MG10	120°	Rm <850-1100			131
N° B92008		HM MG10	144°	Rm <850-1100			133



Countersinks

N° B92360		HM	90°	Rm <850-1100			134
N° B92310 / B92300		HSS	90°	Rm <850-1100			135

Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
	Steel < 500 N/mm ²	3.00	180	0.135	19100	2580	18.0	0.5
		3.30	180	0.145	17360	2515	21.5	0.5
		3.50	180	0.155	16370	2535	24.5	0.5
		3.80	180	0.170	15080	2565	29.0	0.6
		4.00	180	0.185	14325	2650	33.5	0.6
		4.20	180	0.200	13640	2730	38.0	0.6
		4.50	180	0.230	12730	2930	46.5	0.5
		4.80	180	0.245	11935	2925	53.0	0.7
		5.00	180	0.255	11460	2920	57.5	0.7
	Steel 500 - 850 N/mm ²	3.00	160	0.115	16975	1950	14.0	0.6
		3.30	160	0.125	15435	1930	16.5	0.6
		3.50	160	0.135	14550	1965	19.0	0.6
		3.80	160	0.145	13405	1945	22.0	0.8
		4.00	160	0.160	12730	2035	25.5	0.8
		4.20	160	0.170	12125	2060	28.5	0.8
		4.50	160	0.195	11320	2205	35.0	0.7
		4.80	160	0.210	10610	2230	40.5	0.9
		5.00	160	0.215	10185	2190	43.0	1.0
	Steel 850 - 1100 N/mm ²	3.00	140	0.105	14855	1560	11.0	0.8
		3.30	140	0.115	13505	1555	13.5	0.8
		3.50	140	0.125	12730	1590	15.5	0.7
		3.80	140	0.135	11725	1585	18.0	1.0
		4.00	140	0.145	11140	1615	20.5	1.0
		4.20	140	0.155	10610	1645	23.0	1.0
		4.50	140	0.180	9905	1785	28.5	0.9
		4.80	140	0.190	9285	1765	32.0	1.2
		5.00	140	0.200	8915	1785	35.0	1.2
	Steel 1100 - 1300 N/mm ²	3.00	100	0.080	10610	850	6.0	1.4
		3.30	100	0.090	9645	870	7.5	1.4
		3.50	100	0.095	9095	865	8.5	1.4
		3.80	100	0.100	8375	840	9.5	2.0
		4.00	100	0.110	7960	875	11.0	1.8
		4.20	100	0.120	7580	910	12.5	1.8
		4.50	100	0.135	7075	955	15.0	1.7
		4.80	100	0.145	6630	960	17.5	2.1
		5.00	100	0.150	6365	955	19.0	2.2
Material		d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
Steel 1300 - 1500 N/mm ²		3.00	55	0.060	5835	350	2.5	3.5
		3.30	55	0.070	5305	370	3.0	3.2
		3.50	55	0.070	5000	350	3.5	3.4
		3.80	55	0.080	4605	370	4.0	4.4
		4.00	55	0.085	4375	370	4.5	4.4
		4.20	55	0.090	4170	375	5.0	4.3
		4.50	55	0.105	3890	410	6.5	3.9
		4.80	55	0.110	3645	400	7.0	5.1
		5.00	55	0.115	3500	405	8.0	5.1
Cold work tool steel (12% Cr) high alloyed [1.2379] Stainless steel [Cr-Ni/1.4301]		3.00	70	0.060	7425	445	3.0	2.7
		3.30	70	0.070	6750	475	4.0	2.5
		3.50	70	0.070	6365	445	4.5	2.7
		3.80	70	0.080	5865	470	5.5	3.5
		4.00	70	0.085	5570	475	6.0	3.4
		4.20	70	0.090	5305	475	6.5	3.4
		4.50	70	0.105	4950	520	8.5	3.1
		4.80	70	0.110	4640	510	9.0	4.0
		5.00	70	0.115	4455	510	10.0	4.1
Titanium alloys >300 HB [Ti6Al4V]		3.00	40	0.060	4245	255	2.0	4.8
		3.30	40	0.070	3860	270	2.5	4.4
		3.50	40	0.070	3640	255	2.5	4.6
		3.80	40	0.080	3350	270	3.0	6.1
		4.00	40	0.085	3185	270	3.5	6.0
		4.20	40	0.090	3030	275	4.0	5.8
		4.50	40	0.105	2830	295	4.5	5.4
		4.80	40	0.110	2655	290	5.0	7.1
		5.00	40	0.115	2545	295	6.0	7.1
Cast iron (lamellar / spheroidal)		3.00	240	0.120	25465	3055	21.5	0.4
		3.30	240	0.135	23150	3125	26.5	0.4
		3.50	240	0.140	21825	3055	29.5	0.4
		3.80	240	0.155	20105	3115	35.5	0.5
		4.00	240	0.165	19100	3150	39.5	0.5
		4.20	240	0.180	18190	3275	45.5	0.5
		4.50	240	0.205	16975	3480	55.5	0.5
		4.80	240	0.220	15915	3500	63.5	0.6
		5.00	240	0.230	15280	3515	69.0	0.6

Spiral flute drills XDrill®


5xd

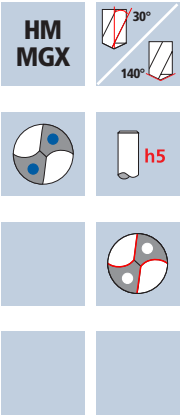

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	GG(G)
-------------	----------------	-----------------	-----------------	--------------	--	--	-------------------	----------------	-------

Example: Order-N°.							DURO-X	
Article-N°.							B72015	
ø-Code								
ø Code	d1 m7	d2 h5	l1	l2	l4	L _{max}		
.0300	3.0	6	66	28	36	20.2		●
.0310	3.1	6	66	28	36	20.2		●
.0320	3.2	6	66	28	36	20.0		●
.0330	3.3	6	66	28	36	20.0		●
.0340	3.4	6	66	28	36	19.8		●
.0350	3.5	6	66	28	36	19.8		●
.0360	3.6	6	66	28	36	19.6		●
.0370	3.7	6	66	28	36	19.6		●
.0380	3.8	6	74	36	36	27.4		●
.0390	3.9	6	74	36	36	27.3		●
.0400	4.0	6	74	36	36	26.9		●
.0410	4.1	6	74	36	36	26.8		●
.0420	4.2	6	74	36	36	26.7		●
.0430	4.3	6	74	36	36	26.7		●
.0440	4.4	6	74	36	36	26.6		●
.0450	4.5	6	74	36	36	26.6		●
.0460	4.6	6	74	36	36	26.5		●
.0470	4.7	6	74	36	36	26.5		●
.0480	4.8	6	82	44	36	34.3		●
.0490	4.9	6	82	44	36	34.3		●
.0500	5.0	6	82	44	36	34.7		●
.0510	5.1	6	82	44	36	34.7		●
.0520	5.2	6	82	44	36	34.6		●

Application



Material

Steel
< 500 N/mm²

Steel
500 - 850 N/mm²

Steel
850 - 1100 N/mm²

Steel
1100 - 1300 N/mm²

Material

Steel
1300 - 1500 N/mm²

Cold work tool steel
(12% Cr)
high alloyed
[1.2379]
Stainless steel
[Cr-Ni/1.4301]

Titanium alloys
>300 HB
[Ti6Al4V]



Cast iron
(lamellar / spheroidal)

d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
5.50	180	0.280	10415	2915	69.5	0.7
5.80	180	0.295	9880	2915	77.0	0.7
6.00	180	0.315	9550	3010	85.0	0.7
6.20	180	0.335	9240	3095	93.5	0.8
6.50	180	0.350	8815	3085	102.5	0.8
6.80	180	0.365	8425	3075	111.5	0.8
7.00	180	0.380	8185	3110	119.5	0.8
7.20	180	0.390	7960	3105	126.5	0.8
7.50	180	0.405	7640	3095	136.5	0.8
5.50	160	0.240	9260	2220	52.5	0.9
5.80	160	0.250	8780	2195	58.0	0.9
6.00	160	0.270	8490	2290	64.5	0.9
6.20	160	0.285	8215	2340	70.5	1.1
6.50	160	0.300	7835	2350	78.0	1.0
6.80	160	0.315	7490	2360	85.5	1.0
7.00	160	0.325	7275	2365	91.0	1.0
7.20	160	0.335	7075	2370	96.5	1.0
7.50	160	0.345	6790	2345	103.5	1.0
5.50	140	0.220	8100	1780	42.5	1.2
5.80	140	0.230	7685	1770	47.0	1.2
6.00	140	0.250	7425	1855	52.5	1.1
6.20	140	0.265	7190	1905	57.5	1.3
6.50	140	0.275	6855	1885	62.5	1.3
6.80	140	0.290	6555	1900	69.0	1.3
7.00	140	0.300	6365	1910	73.5	1.3
7.20	140	0.305	6190	1890	77.0	1.3
7.50	140	0.320	5940	1900	84.0	1.3
5.50	100	0.165	5785	955	22.5	2.2
5.80	100	0.175	5490	960	25.5	2.1
6.00	100	0.190	5305	1010	28.5	2.0
6.20	100	0.200	5135	1025	31.0	2.4
6.50	100	0.210	4895	1030	34.0	2.4
6.80	100	0.220	4680	1030	37.5	2.4
7.00	100	0.225	4545	1025	39.5	2.4
7.20	100	0.235	4420	1040	42.5	2.3
7.50	100	0.245	4245	1040	46.0	2.3

d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
5.50	55	0.130	3185	415	10.0	5.0
5.80	55	0.135	3020	410	11.0	5.0
6.00	55	0.145	2920	425	12.0	4.8
6.20	55	0.155	2825	440	13.5	5.6
6.50	55	0.160	2695	430	14.5	5.7
6.80	55	0.170	2575	440	16.0	5.6
7.00	55	0.175	2500	440	17.0	5.6
7.20	55	0.180	2430	435	17.5	5.6
7.50	55	0.185	2335	430	19.0	5.6
5.50	70	0.130	4050	525	12.5	3.9
5.80	70	0.135	3840	520	13.5	4.0
6.00	70	0.145	3715	540	15.5	3.8
6.20	70	0.155	3595	555	17.0	4.5
6.50	70	0.160	3430	550	18.5	4.5
6.80	70	0.170	3275	555	20.0	4.4
7.00	70	0.175	3185	555	21.5	4.4
7.20	70	0.180	3095	555	22.5	4.4
7.50	70	0.185	2970	550	24.5	4.4
5.50	40	0.130	2315	300	7.0	6.9
5.80	40	0.135	2195	295	8.0	7.0
6.00	40	0.145	2120	305	8.5	6.7
6.20	40	0.155	2055	320	9.5	7.7
6.50	40	0.160	1960	315	10.5	7.8
6.80	40	0.170	1870	320	11.5	7.7
7.00	40	0.175	1820	320	12.5	7.6
7.20	40	0.180	1770	320	13.0	7.6
7.50	40	0.185	1700	315	14.0	7.7
5.50	240	0.255	13890	3540	84.0	0.6
5.80	240	0.265	13170	3490	92.0	0.6
6.00	240	0.285	12730	3630	102.5	0.6
6.20	240	0.305	12320	3760	113.5	0.7
6.50	240	0.320	11755	3760	125.0	0.7
6.80	240	0.335	11235	3765	136.5	0.7
7.00	240	0.345	10915	3765	145.0	0.6
7.20	240	0.355	10610	3765	153.5	0.6
7.50	240	0.370	10185	3770	166.5	0.6


Spiral flute drills XDrill®

5xd

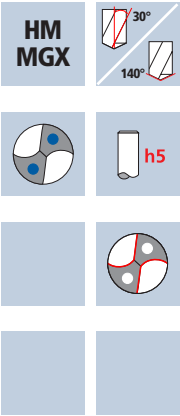



Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	GG(G)
-------------	----------------	-----------------	-----------------	--------------	--	--	-------------------	----------------	-------

Example: Order-N°.							DURO-X	
Article-N°.							B72015	
ø-Code								
ø Code	d1 m7	d2 h5	l1	l2	l4	L _{max}		
.0530	5.3	6	82	44	36	34.6		●
.0540	5.4	6	82	44	36	34.5		●
.0550	5.5	6	82	44	36	34.4		●
.0560	5.6	6	82	44	36	34.3		●
.0570	5.7	6	82	44	36	34.4		●
.0580	5.8	6	82	44	36	34.3		●
.0590	5.9	6	82	44	36	34.3		●
.0600	6.0	6	82	44	36	34.3		●
.0610	6.1	8	91	53	36	41.3		●
.0620	6.2	8	91	53	36	41.2		●
.0630	6.3	8	91	53	36	41.2		●
.0640	6.4	8	91	53	36	41.1		●
.0650	6.5	8	91	53	36	41.0		●
.0660	6.6	8	91	53	36	40.9		●
.0670	6.7	8	91	53	36	40.9		●
.0680	6.8	8	91	53	36	40.8		●
.0690	6.9	8	91	53	36	40.8		●
.0700	7.0	8	91	53	36	40.7		●
.0710	7.1	8	91	53	36	40.7		●
.0720	7.2	8	91	53	36	40.6		●
.0730	7.3	8	91	53	36	40.5		●
.0740	7.4	8	91	53	36	40.4		●
.0750	7.5	8	91	53	36	40.4		●

Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
	Steel < 500 N/mm ²	7.60	180	0.410	7540	3090	140.0	0.8
		8.00	180	0.430	7160	3080	155.0	0.8
		8.20	180	0.445	6985	3110	164.0	0.9
		8.50	180	0.460	6740	3100	176.0	0.9
		8.80	180	0.475	6510	3090	188.0	0.9
		9.00	180	0.485	6365	3085	196.5	0.9
		9.20	180	0.495	6230	3085	205.0	0.9
		9.50	180	0.515	6030	3105	220.0	0.9
		9.80	180	0.530	5845	3100	234.0	0.9
	Steel 500 - 850 N/mm ²	7.60	160	0.350	6700	2345	106.5	1.0
		8.00	160	0.370	6365	2355	118.5	1.0
		8.20	160	0.380	6210	2360	124.5	1.2
		8.50	160	0.395	5990	2365	134.0	1.2
		8.80	160	0.405	5785	2345	142.5	1.2
		9.00	160	0.415	5660	2350	149.5	1.2
		9.20	160	0.425	5535	2350	156.0	1.2
		9.50	160	0.440	5360	2360	167.5	1.2
		9.80	160	0.455	5195	2365	178.5	1.1
	Steel 850 - 1100 N/mm ²	7.60	140	0.325	5865	1905	86.5	1.3
		8.00	140	0.340	5570	1895	95.5	1.3
		8.20	140	0.350	5435	1900	100.5	1.5
		8.50	140	0.360	5245	1890	107.0	1.5
		8.80	140	0.375	5065	1900	115.5	1.4
		9.00	140	0.385	4950	1905	121.0	1.4
		9.20	140	0.390	4845	1890	125.5	1.4
		9.50	140	0.405	4690	1900	134.5	1.4
		9.80	140	0.420	4545	1910	144.0	1.4
	Steel 1100 - 1300 N/mm ²	7.60	100	0.245	4190	1025	46.5	2.4
		8.00	100	0.260	3980	1035	52.0	2.3
		8.20	100	0.265	3880	1030	54.5	2.7
		8.50	100	0.275	3745	1030	58.5	2.7
		8.80	100	0.285	3615	1030	62.5	2.7
		9.00	100	0.290	3535	1025	65.0	2.7
		9.20	100	0.300	3460	1040	69.0	2.6
		9.50	100	0.310	3350	1040	73.5	2.6
		9.80	100	0.320	3250	1040	78.5	2.6
Material		d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
Steel 1300 - 1500 N/mm ²		7.60	55	0.190	2305	440	20.0	5.5
		8.00	55	0.200	2190	440	22.0	5.5
		8.20	55	0.205	2135	440	23.0	6.3
		8.50	55	0.210	2060	435	24.5	6.3
		8.80	55	0.220	1990	440	27.0	6.2
		9.00	55	0.225	1945	440	28.0	6.2
		9.20	55	0.230	1905	440	29.0	6.2
		9.50	55	0.235	1845	435	31.0	6.3
		9.80	55	0.245	1785	435	33.0	6.2
Cold work tool steel (12% Cr) high alloyed [1.2379] Stainless steel [Cr-Ni/1.4301]		7.60	70	0.190	2930	555	25.0	4.4
		8.00	70	0.200	2785	555	28.0	4.4
		8.20	70	0.205	2715	555	29.5	5.0
		8.50	70	0.210	2620	550	31.0	5.0
		8.80	70	0.220	2530	555	34.0	5.0
		9.00	70	0.225	2475	555	35.5	4.9
		9.20	70	0.230	2420	555	37.0	4.9
		9.50	70	0.235	2345	550	39.0	4.9
		9.80	70	0.245	2275	555	42.0	4.9
Titanium alloys >300 HB [Ti6Al4V]		7.60	40	0.190	1675	320	14.5	7.6
		8.00	40	0.200	1590	320	16.0	7.6
		8.20	40	0.205	1555	320	17.0	8.7
		8.50	40	0.210	1500	315	18.0	8.8
		8.80	40	0.220	1445	320	19.5	8.6
		9.00	40	0.225	1415	320	20.5	8.6
		9.20	40	0.230	1385	320	21.5	8.5
		9.50	40	0.235	1340	315	22.5	8.6
		9.80	40	0.245	1300	320	24.0	8.5
Cast iron (lamellar / spheroidal)		7.60	240	0.375	10050	3770	171.0	0.6
		8.00	240	0.395	9550	3770	189.5	0.6
		8.20	240	0.405	9315	3775	199.5	0.7
		8.50	240	0.415	8990	3730	211.5	0.7
		8.80	240	0.430	8680	3730	227.0	0.7
		9.00	240	0.440	8490	3735	237.5	0.7
		9.20	240	0.450	8305	3735	248.5	0.7
		9.50	240	0.465	8040	3740	265.0	0.7
		9.80	240	0.480	7795	3740	282.0	0.7

Spiral flute drills XDrill®

5xd

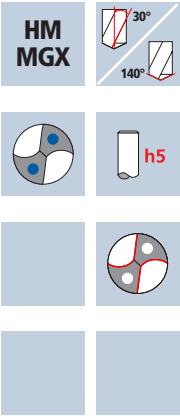

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	GG(G)
-------------	----------------	-----------------	-----------------	--------------	--	--	-------------------	----------------	-------



Example: Order-N°.							DURO-X	
Article-N°.							B72015	
ø-Code								
ø Code	d1 m7	d2 h5	l1	l2	l4	L _{max}		
.0760	7.6	8	91	53	36	40.3		●
.0770	7.7	8	91	53	36	40.3		●
.0780	7.8	8	91	53	36	40.3		●
.0790	7.9	8	91	53	36	40.3		●
.0800	8.0	8	91	53	36	40.3		●
.0810	8.1	10	103	61	40	46.3		●
.0820	8.2	10	103	61	40	46.2		●
.0830	8.3	10	103	61	40	46.2		●
.0840	8.4	10	103	61	40	46.0		●
.0850	8.5	10	103	61	40	46.0		●
.0860	8.6	10	103	61	40	45.9		●
.0870	8.7	10	103	61	40	45.9		●
.0880	8.8	10	103	61	40	45.8		●
.0890	8.9	10	103	61	40	45.8		●
.0900	9.0	10	103	61	40	45.7		●
.0910	9.1	10	103	61	40	45.6		●
.0920	9.2	10	103	61	40	45.5		●
.0930	9.3	10	103	61	40	45.5		●
.0940	9.4	10	103	61	40	45.4		●
.0950	9.5	10	103	61	40	45.4		●
.0960	9.6	10	103	61	40	45.3		●
.0970	9.7	10	103	61	40	45.3		●
.0980	9.8	10	103	61	40	45.2		●

Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
	Steel < 500 N/mm²	10.00	180	0.540	5730	3095	243.0	0.9
		10.20	180	0.545	5615	3060	250.0	1.0
		10.50	180	0.565	5455	3080	266.5	1.0
		10.80	180	0.575	5305	3050	279.5	1.0
		11.00	180	0.585	5210	3050	290.0	1.0
		11.20	180	0.585	5115	2990	294.5	1.1
		11.50	180	0.590	4980	2940	305.5	1.1
		11.80	180	0.600	4855	2915	319.0	1.1
		12.00	180	0.610	4775	2915	329.5	1.1
	Steel 500 - 850 N/mm²	10.00	160	0.465	5095	2370	186.0	1.1
		10.20	160	0.470	4995	2350	192.0	1.4
		10.50	160	0.485	4850	2350	203.5	1.4
		10.80	160	0.495	4715	2335	214.0	1.4
		11.00	160	0.500	4630	2315	220.0	1.4
		11.20	160	0.500	4545	2275	224.0	1.4
		11.50	160	0.505	4430	2235	232.0	1.4
		11.80	160	0.510	4315	2200	240.5	1.4
		12.00	160	0.520	4245	2205	249.5	1.4
	Steel 850 - 1100 N/mm²	10.00	140	0.425	4455	1895	149.0	1.4
		10.20	140	0.430	4370	1880	153.5	1.7
		10.50	140	0.445	4245	1890	163.5	1.7
		10.80	140	0.455	4125	1875	172.0	1.7
		11.00	140	0.460	4050	1865	177.0	1.7
		11.20	140	0.465	3980	1850	182.5	1.7
		11.50	140	0.465	3875	1800	187.0	1.7
		11.80	140	0.470	3775	1775	194.0	1.8
		12.00	140	0.480	3715	1785	202.0	1.8
	Steel 1100 - 1300 N/mm²	10.00	100	0.325	3185	1035	81.5	2.6
		10.20	100	0.330	3120	1030	84.0	3.1
		10.50	100	0.340	3030	1030	89.0	3.1
		10.80	100	0.345	2945	1015	93.0	3.1
		11.00	100	0.350	2895	1015	96.5	3.1
		11.20	100	0.350	2840	995	98.0	3.2
		11.50	100	0.355	2770	985	102.5	3.2
		11.80	100	0.360	2700	970	106.0	3.2
		12.00	100	0.365	2655	970	109.5	3.2

Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
Steel 1300 - 1500 N/mm²	10.00	55	0.250	1750	440	34.5	6.2
	10.20	55	0.255	1715	435	35.5	7.3
	10.50	55	0.260	1665	435	37.5	7.3
	10.80	55	0.265	1620	430	39.5	7.4
	11.00	55	0.270	1590	430	41.0	7.3
	11.20	55	0.270	1565	425	42.0	7.4
	11.50	55	0.270	1520	410	42.5	7.7
	11.80	55	0.275	1485	410	45.0	7.6
	12.00	55	0.280	1460	410	46.5	7.6
Cold work tool steel (12% Cr) high alloyed [1.2379] Stainless steel [Cr-Ni/1.4301]	10.00	70	0.250	2230	560	44.0	4.8
	10.20	70	0.255	2185	555	45.5	5.7
	10.50	70	0.260	2120	550	47.5	5.8
	10.80	70	0.265	2065	545	50.0	5.8
	11.00	70	0.270	2025	545	52.0	5.8
	11.20	70	0.270	1990	535	52.5	5.9
	11.50	70	0.270	1940	525	54.5	6.0
	11.80	70	0.275	1890	520	57.0	6.0
	12.00	70	0.280	1855	520	59.0	6.0
Titanium alloys >300 HB [Ti6Al4V]	10.00	40	0.250	1275	320	25.0	8.5
	10.20	40	0.255	1250	320	26.0	10.0
	10.50	40	0.260	1215	315	27.5	10.1
	10.80	40	0.265	1180	315	29.0	10.1
	11.00	40	0.270	1155	310	29.5	10.2
	11.20	40	0.270	1135	305	30.0	10.3
	11.50	40	0.270	1105	300	31.0	10.5
	11.80	40	0.275	1080	295	32.5	10.6
	12.00	40	0.280	1060	295	33.5	10.6
Cast iron (lamellar / spheroidal)	10.00	240	0.490	7640	3745	294.0	0.7
	10.20	240	0.500	7490	3745	306.0	0.9
	10.50	240	0.510	7275	3710	321.0	0.9
	10.80	240	0.525	7075	3715	340.5	0.9
	11.00	240	0.530	6945	3680	349.5	0.9
	11.20	240	0.535	6820	3650	359.5	0.9
	11.50	240	0.535	6645	3555	369.5	0.9
	11.80	240	0.545	6475	3530	386.0	0.9
	12.00	240	0.555	6365	3535	400.0	0.9

Spiral flute drills XDrill®

5xd

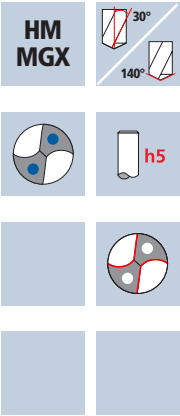

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	GG(G)
-------------	----------------	-----------------	-----------------	--------------	--	--	-------------------	----------------	-------



Example: Order-N°.							DURO-X	
Article-N°.							B72015	
ø-Code								
ø Code	d1 m7	d2 h5	l1	l2	l4	L _{max}		
.0990	9.9	10	103	61	40	45.3		●
.1000	10.0	10	103	61	40	45.2		●
.1010	10.1	12	118	71	45	53.2		●
.1020	10.2	12	118	71	45	53.1		●
.1030	10.3	12	118	71	45	53.1		●
.1040	10.4	12	118	71	45	53.0		●
.1050	10.5	12	118	71	45	53.0		●
.1060	10.6	12	118	71	45	52.9		●
.1070	10.7	12	118	71	45	52.9		●
.1080	10.8	12	118	71	45	52.8		●
.1090	10.9	12	118	71	45	52.7		●
.1100	11.0	12	118	71	45	52.6		●
.1110	11.1	12	118	71	45	52.6		●
.1120	11.2	12	118	71	45	52.5		●
.1130	11.3	12	118	71	45	52.5		●
.1140	11.4	12	118	71	45	52.4		●
.1150	11.5	12	118	71	45	52.4		●
.1160	11.6	12	118	71	45	52.3		●
.1170	11.7	12	118	71	45	52.3		●
.1180	11.8	12	118	71	45	52.2		●
.1190	11.9	12	118	71	45	52.2		●
.1200	12.0	12	118	71	45	52.2		●

Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
	Steel < 500 N/mm²	12.20	180	0.620	4695	2910	340.0	1.2
		12.50	180	0.635	4585	2910	357.0	1.2
		12.60	180	0.640	4545	2910	363.0	1.2
		12.80	180	0.650	4475	2910	374.5	1.1
		13.00	180	0.660	4405	2905	385.5	1.1
		13.20	180	0.670	4340	2910	398.0	1.1
		13.50	180	0.675	4245	2865	410.0	1.2
		13.80	180	0.675	4150	2800	419.0	1.2
		14.00	180	0.680	4095	2785	428.5	1.2
	Steel 500 - 850 N/mm²	12.20	160	0.530	4175	2215	259.0	1.5
		12.50	160	0.545	4075	2220	272.5	1.5
		12.60	160	0.545	4040	2200	274.5	1.5
		12.80	160	0.555	3980	2210	284.5	1.5
		13.00	160	0.565	3920	2215	294.0	1.5
		13.20	160	0.575	3860	2220	304.0	1.5
		13.50	160	0.580	3775	2190	313.5	1.5
		13.80	160	0.580	3690	2140	320.0	1.5
		14.00	160	0.585	3640	2130	328.0	1.6
	Steel 850 - 1100 N/mm²	12.20	140	0.490	3655	1790	209.0	1.9
		12.50	140	0.500	3565	1785	219.0	1.9
		12.60	140	0.505	3535	1785	222.5	1.9
		12.80	140	0.510	3480	1775	228.5	1.9
		13.00	140	0.520	3430	1785	237.0	1.9
		13.20	140	0.530	3375	1790	245.0	1.9
		13.50	140	0.535	3300	1765	252.5	1.9
		13.80	140	0.535	3230	1730	259.0	1.9
		14.00	140	0.540	3185	1720	265.0	1.9
	Steel 1100 - 1300 N/mm²	12.20	100	0.370	2610	965	113.0	3.5
		12.50	100	0.380	2545	965	118.5	3.5
		12.60	100	0.385	2525	970	121.0	3.5
		12.80	100	0.390	2485	970	125.0	3.4
		13.00	100	0.395	2450	970	129.0	3.4
		13.20	100	0.400	2410	965	132.0	3.5
		13.50	100	0.405	2360	955	136.5	3.5
		13.80	100	0.405	2305	935	140.0	3.5
		14.00	100	0.410	2275	935	144.0	3.5

Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
Steel 1300 - 1500 N/mm²	12.20	55	0.285	1435	410	48.0	8.2
	12.50	55	0.290	1400	405	49.5	8.3
	12.60	55	0.295	1390	410	51.0	8.2
	12.80	55	0.300	1370	410	53.0	8.2
	13.00	55	0.305	1345	410	54.5	8.1
	13.20	55	0.310	1325	410	56.0	8.1
	13.50	55	0.310	1295	400	57.5	8.3
	13.80	55	0.310	1270	395	59.0	8.4
	14.00	55	0.315	1250	395	61.0	8.4
Cold work tool steel (12% Cr) high alloyed [1.2379] Stainless steel [Cr-Ni/1.4301]	12.20	70	0.285	1825	520	61.0	6.5
	12.50	70	0.290	1785	520	64.0	6.5
	12.60	70	0.295	1770	520	65.0	6.5
	12.80	70	0.300	1740	520	67.0	6.4
	13.00	70	0.305	1715	525	69.5	6.4
	13.20	70	0.310	1690	525	72.0	6.3
	13.50	70	0.310	1650	510	73.0	6.5
	13.80	70	0.310	1615	500	75.0	6.6
	14.00	70	0.315	1590	500	77.0	6.6
Titanium alloys >300 HB [Ti6Al4V]	12.20	40	0.285	1045	300	35.0	11.2
	12.50	40	0.290	1020	295	36.0	11.4
	12.60	40	0.295	1010	300	37.5	11.2
	12.80	40	0.300	995	300	38.5	11.1
	13.00	40	0.305	980	300	40.0	11.1
	13.20	40	0.310	965	300	41.0	11.1
	13.50	40	0.310	945	295	42.0	11.2
	13.80	40	0.310	925	285	42.5	11.6
	14.00	40	0.315	910	285	44.0	11.6
Cast iron (lamellar / spheroidal)	12.20	240	0.560	6260	3505	409.5	1.0
	12.50	240	0.575	6110	3515	431.5	1.0
	12.60	240	0.580	6065	3520	439.0	1.0
	12.80	240	0.590	5970	3520	453.0	0.9
	13.00	240	0.600	5875	3525	468.0	0.9
	13.20	240	0.610	5785	3530	483.0	0.9
	13.50	240	0.615	5660	3480	498.0	1.0
	13.80	240	0.615	5535	3405	509.5	1.0
	14.00	240	0.620	5455	3380	520.5	1.0

Spiral flute drills XDrill®

5xd

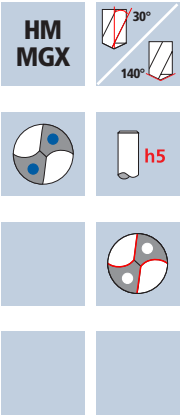

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	GG(G)
-------------	----------------	-----------------	-----------------	--------------	--	--	-------------------	----------------	-------



Example: Order-N°.							DURO-X	
Article-N°.							B72015	
ø-Code								
ø Code	d1 m7	d2 h5	l1	l2	l4	L _{max}		
.1210	12.1	14	124	77	45	56.2		●
.1220	12.2	14	124	77	45	56.1		●
.1230	12.3	14	124	77	45	56.1		●
.1240	12.4	14	124	77	45	56.0		●
.1250	12.5	14	124	77	45	56.0		●
.1260	12.6	14	124	77	45	55.9		●
.1270	12.7	14	124	77	45	55.8		●
.1280	12.8	14	124	77	45	55.7		●
.1290	12.9	14	124	77	45	55.7		●
.1300	13.0	14	124	77	45	55.6		●
.1310	13.1	14	124	77	45	55.6		●
.1320	13.2	14	124	77	45	55.5		●
.1330	13.3	14	124	77	45	55.5		●
.1340	13.4	14	124	77	45	55.4		●
.1350	13.5	14	124	77	45	55.3		●
.1360	13.6	14	124	77	45	55.2		●
.1370	13.7	14	124	77	45	55.2		●
.1380	13.8	14	124	77	45	55.1		●
.1390	13.9	14	124	77	45	55.2		●
.1400	14.0	14	124	77	45	55.1		●

Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
	Steel < 500 N/mm²	14.20	180	0.685	4035	2765	438.0	1.3
		14.50	180	0.690	3950	2725	450.0	1.3
		14.80	180	0.700	3870	2710	466.0	1.3
		15.00	180	0.710	3820	2710	479.0	1.3
		15.20	180	0.720	3770	2715	492.5	1.3
		15.50	180	0.725	3695	2680	505.5	1.3
		15.70	180	0.725	3650	2645	512.0	1.3
		15.80	180	0.730	3625	2645	518.5	1.3
		16.00	180	0.735	3580	2630	529.0	1.3
		16.00	180	0.735	3580	2630	529.0	1.3
	Steel 500 - 850 N/mm²	14.20	160	0.590	3585	2115	335.0	1.7
		14.50	160	0.590	3510	2070	342.0	1.7
		14.80	160	0.600	3440	2065	355.0	1.7
		15.00	160	0.610	3395	2070	366.0	1.7
		15.20	160	0.615	3350	2060	374.0	1.7
		15.50	160	0.620	3285	2035	384.0	1.7
		15.70	160	0.625	3245	2030	393.0	1.7
		15.80	160	0.625	3225	2015	395.0	1.7
		16.00	160	0.630	3185	2005	403.0	1.7
		16.00	160	0.630	3185	2005	403.0	1.7
	Steel 850 - 1100 N/mm²	14.20	140	0.540	3140	1695	268.5	2.1
		14.50	140	0.545	3075	1675	276.5	2.1
		14.80	140	0.555	3010	1670	287.5	2.1
		15.00	140	0.560	2970	1665	294.0	2.1
		15.20	140	0.570	2930	1670	303.0	2.1
		15.50	140	0.570	2875	1640	309.5	2.1
		15.70	140	0.575	2840	1635	316.5	2.1
		15.80	140	0.580	2820	1635	320.5	2.1
		16.00	140	0.580	2785	1615	324.5	2.2
		16.00	140	0.580	2785	1615	324.5	2.2
	Steel 1100 - 1300 N/mm²	14.20	100	0.410	2240	920	145.5	3.9
		14.50	100	0.415	2195	910	150.5	3.9
		14.80	100	0.420	2150	905	155.5	3.9
		15.00	100	0.425	2120	900	159.0	3.9
		15.20	100	0.430	2095	900	163.5	3.9
		15.50	100	0.435	2055	895	169.0	3.9
		15.70	100	0.435	2025	880	170.5	4.0
		15.80	100	0.440	2015	885	173.5	3.9
		16.00	100	0.440	1990	875	176.0	4.0
		16.00	100	0.440	1990	875	176.0	4.0

Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
Steel 1300 - 1500 N/mm²	14.20	55	0.315	1235	390	62.0	9.1
	14.50	55	0.320	1205	385	63.5	9.2
	14.80	55	0.325	1185	385	66.0	9.1
	15.00	55	0.330	1165	385	68.0	9.1
	15.20	55	0.330	1150	380	69.0	9.2
	15.50	55	0.335	1130	380	71.5	9.2
	15.70	55	0.335	1115	375	72.5	9.3
	15.80	55	0.340	1110	375	73.5	9.3
	16.00	55	0.340	1095	370	74.5	9.4
	16.00	55	0.340	1095	370	74.5	9.4
Cold work tool steel (12% Cr) high alloyed [1.2379] Stainless steel [Cr-Ni/1.4301]	14.20	70	0.315	1570	495	78.5	7.2
	14.50	70	0.320	1535	490	81.0	7.2
	14.80	70	0.325	1505	490	84.5	7.2
	15.00	70	0.330	1485	490	86.5	7.2
	15.20	70	0.330	1465	485	88.0	7.2
	15.50	70	0.335	1440	480	90.5	7.3
	15.70	70	0.335	1420	475	92.0	7.3
	15.80	70	0.340	1410	480	94.0	7.3
	16.00	70	0.340	1395	475	95.5	7.3
	16.00	70	0.340	1395	475	95.5	7.3
Titanium alloys >300 HB [Ti6Al4V]	14.20	40	0.315	895	280	44.5	12.7
	14.50	40	0.320	880	280	46.0	12.6
	14.80	40	0.325	860	280	48.0	12.6
	15.00	40	0.330	850	280	49.5	12.6
	15.20	40	0.330	840	275	50.0	12.8
	15.50	40	0.335	820	275	52.0	12.7
	15.70	40	0.335	810	270	52.5	12.9
	15.80	40	0.340	805	275	54.0	12.7
	16.00	40	0.340	795	270	54.5	12.9
	16.00	40	0.340	795	270	54.5	12.9
Cast iron (lamellar / spheroidal)	14.20	240	0.625	5380	3365	533.0	1.1
	14.50	240	0.630	5270	3320	548.0	1.1
	14.80	240	0.635	5160	3275	563.5	1.1
	15.00	240	0.645	5095	3285	580.5	1.1
	15.20	240	0.655	5025	3290	597.0	1.1
	15.50	240	0.660	4930	3255	614.0	1.1
	15.70	240	0.660	4865	3210	621.5	1.1
	15.80	240	0.665	4835	3215	630.5	1.1
	16.00	240	0.670	4775	3200	643.5	1.1
	16.00	240	0.670	4775	3200	643.5	1.1

Spiral flute drills XDrill®

5xd

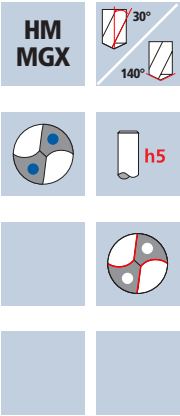

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	GG(G)
-------------	----------------	-----------------	-----------------	--------------	--	--	-------------------	----------------	-------



Example: Order-N°.							DURO-X	
Article-N°.							B72015	
ø-Code								
ø Code	d1 m7	d2 h5	l1	l2	l4	L _{max}		
.1410	14.1	16	133	83	48	59.2		●
.1420	14.2	16	133	83	48	59.1		●
.1430	14.3	16	133	83	48	59.1		●
.1440	14.4	16	133	83	48	59.0		●
.1450	14.5	16	133	83	48	59.0		●
.1460	14.6	16	133	83	48	58.8		●
.1470	14.7	16	133	83	48	58.8		●
.1480	14.8	16	133	83	48	58.7		●
.1490	14.9	16	133	83	48	58.7		●
.1500	15.0	16	133	83	48	58.6		●
.1510	15.1	16	133	83	48	58.6		●
.1520	15.2	16	133	83	48	58.5		●
.1530	15.3	16	133	83	48	58.5		●
.1540	15.4	16	133	83	48	58.3		●
.1550	15.5	16	133	83	48	58.3		●
.1560	15.6	16	133	83	48	58.2		●
.1570	15.7	16	133	83	48	58.2		●
.1580	15.8	16	133	83	48	58.1		●
.1590	15.9	16	133	83	48	58.1		●
.1600	16.0	16	133	83	48	58.1		●

Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
	Steel < 500 N/mm²	16.20	180	0.740	3535	2615	539.0	1.5
		16.40	180	0.750	3495	2620	553.5	1.5
		16.50	180	0.755	3470	2620	560.0	1.5
		16.80	180	0.755	3410	2575	571.0	1.5
		17.00	180	0.760	3370	2560	581.0	1.5
		17.20	180	0.765	3330	2545	591.5	1.5
		17.50	180	0.770	3275	2520	606.0	1.6
		17.70	180	0.775	3235	2505	616.5	1.6
		18.00	180	0.780	3185	2485	632.5	1.6
	Steel 500 - 850 N/mm²	16.20	160	0.635	3145	1995	411.0	2.0
		16.40	160	0.640	3105	1985	419.5	2.0
		16.50	160	0.645	3085	1990	425.5	2.0
		16.80	160	0.650	3030	1970	436.5	2.0
		17.00	160	0.650	2995	1945	441.5	2.0
		17.20	160	0.655	2960	1940	451.0	2.0
		17.50	160	0.660	2910	1920	462.0	2.0
		17.70	160	0.660	2875	1900	467.5	2.1
		18.00	160	0.670	2830	1895	482.0	2.1
	Steel 850 - 1100 N/mm²	16.20	140	0.585	2750	1610	332.0	2.5
		16.40	140	0.590	2715	1600	338.0	2.5
		16.50	140	0.595	2700	1605	343.0	2.5
		16.80	140	0.595	2655	1580	350.0	2.5
		17.00	140	0.600	2620	1570	356.5	2.5
		17.20	140	0.600	2590	1555	361.5	2.5
		17.50	140	0.610	2545	1550	373.0	2.5
		17.70	140	0.610	2520	1535	377.5	2.5
		18.00	140	0.615	2475	1520	387.0	2.6
	Steel 1100 - 1300 N/mm²	16.20	100	0.445	1965	875	180.5	4.5
		16.40	100	0.450	1940	875	185.0	4.5
		16.50	100	0.450	1930	870	186.0	4.5
		16.80	100	0.455	1895	860	190.5	4.6
		17.00	100	0.455	1870	850	193.0	4.6
		17.20	100	0.460	1850	850	197.5	4.6
		17.50	100	0.460	1820	835	201.0	4.7
		17.70	100	0.465	1800	835	205.5	4.7
		18.00	100	0.470	1770	830	211.0	4.7

Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
Steel 1300 - 1500 N/mm²	16.20	55	0.340	1080	365	75.0	10.9
	16.40	55	0.345	1070	370	78.0	10.7
	16.50	55	0.350	1060	370	79.0	10.7
	16.80	55	0.350	1040	365	81.0	10.8
	17.00	55	0.350	1030	360	81.5	10.9
	17.20	55	0.350	1020	355	82.5	11.1
	17.50	55	0.355	1000	355	85.5	11.0
	17.70	55	0.355	990	350	86.0	11.2
	18.00	55	0.360	975	350	89.0	11.1
Cold work tool steel (12% Cr) high alloyed [1.2379] Stainless steel [Cr-Ni/1.4301]	16.20	70	0.340	1375	470	97.0	8.4
	16.40	70	0.345	1360	470	99.5	8.4
	16.50	70	0.350	1350	475	101.5	8.3
	16.80	70	0.350	1325	465	103.0	8.5
	17.00	70	0.350	1310	460	104.5	8.6
	17.20	70	0.350	1295	455	105.5	8.6
	17.50	70	0.355	1275	455	109.5	8.6
	17.70	70	0.355	1260	445	109.5	8.8
	18.00	70	0.360	1240	445	113.0	8.8
Titanium alloys >300 HB [Ti6Al4V]	16.20	40	0.340	785	265	54.5	15.0
	16.40	40	0.345	775	265	56.0	14.9
	16.50	40	0.350	770	270	57.5	14.6
	16.80	40	0.350	760	265	58.5	14.9
	17.00	40	0.350	750	265	60.0	14.9
	17.20	40	0.350	740	260	60.5	15.1
	17.50	40	0.355	730	260	62.5	15.1
	17.70	40	0.355	720	255	62.5	15.3
	18.00	40	0.360	705	255	65.0	15.3
Cast iron (lamellar / spheroidal)	16.20	240	0.675	4715	3185	656.5	1.2
	16.40	240	0.680	4660	3170	669.5	1.2
	16.50	240	0.685	4630	3170	678.0	1.2
	16.80	240	0.685	4545	3115	690.5	1.3
	17.00	240	0.690	4495	3100	703.5	1.3
	17.20	240	0.695	4440	3085	717.0	1.3
	17.50	240	0.700	4365	3055	735.0	1.3
	17.70	240	0.705	4315	3040	748.0	1.3
	18.00	240	0.710	4245	3015	767.0	1.3

Spiral flute drills XDrill®

5xd

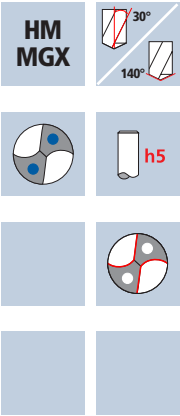




Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	GG(G)
-------------	----------------	-----------------	-----------------	--------------	--	--	-------------------	----------------	-------

Example: Order-N°.							DURO-X	
Article-N°.							B72015	
ø-Code								
ø Code	d1 m7	d2 h5	l1	l2	l4	L _{max}		
.1610	16.1	18	143	93	48	66.2		●
.1620	16.2	18	143	93	48	66.1		●
.1630	16.3	18	143	93	48	66.1		●
.1640	16.4	18	143	93	48	65.9		●
.1650	16.5	18	143	93	48	65.9		●
.1660	16.6	18	143	93	48	65.8		●
.1670	16.7	18	143	93	48	65.8		●
.1680	16.8	18	143	93	48	65.7		●
.1690	16.9	18	143	93	48	65.7		●
.1700	17.0	18	143	93	48	65.6		●
.1710	17.1	18	143	93	48	65.5		●
.1720	17.2	18	143	93	48	65.4		●
.1730	17.3	18	143	93	48	65.4		●
.1740	17.4	18	143	93	48	65.3		●
.1750	17.5	18	143	93	48	65.3		●
.1760	17.6	18	143	93	48	65.2		●
.1770	17.7	18	143	93	48	65.2		●
.1780	17.8	18	143	93	48	65.1		●
.1790	17.9	18	143	93	48	65.1		●
.1800	18.0	18	143	93	48	65.0		●

Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
	Steel < 500 N/mm²	18.50	180	0.785	3095	2430	653.0	1.7
		18.70	180	0.785	3065	2405	660.5	1.8
		19.00	180	0.790	3015	2380	675.0	1.8
		19.20	180	0.795	2985	2375	687.5	1.8
		19.30	180	0.800	2970	2375	695.0	1.8
		19.50	180	0.805	2940	2365	706.5	1.8
		19.70	180	0.810	2910	2355	718.0	1.8
		19.80	180	0.810	2895	2345	722.0	1.8
		20.00	180	0.820	2865	2350	738.5	1.8
	Steel 500 - 850 N/mm²	18.50	160	0.670	2755	1845	496.0	2.3
		18.70	160	0.675	2725	1840	505.5	2.3
		19.00	160	0.680	2680	1820	516.0	2.3
		19.20	160	0.680	2655	1805	522.5	2.3
		19.30	160	0.685	2640	1810	529.5	2.3
		19.50	160	0.690	2610	1800	537.5	2.3
		19.70	160	0.690	2585	1785	544.0	2.4
		19.80	160	0.695	2570	1785	549.5	2.4
		20.00	160	0.705	2545	1795	564.0	2.3
	Steel 850 - 1100 N/mm²	18.50	140	0.620	2410	1495	402.0	2.8
		18.70	140	0.620	2385	1480	406.5	2.9
		19.00	140	0.625	2345	1465	415.5	2.9
		19.20	140	0.625	2320	1450	420.0	2.9
		19.30	140	0.630	2310	1455	425.5	2.9
		19.50	140	0.635	2285	1450	433.0	2.9
		19.70	140	0.640	2260	1445	440.5	2.9
		19.80	140	0.640	2250	1440	443.5	2.9
		20.00	140	0.645	2230	1440	452.5	2.9
	Steel 1100 - 1300 N/mm²	18.50	100	0.470	1720	810	217.5	5.2
		18.70	100	0.470	1700	800	219.5	5.3
		19.00	100	0.475	1675	795	225.5	5.3
		19.20	100	0.475	1660	790	228.5	5.3
		19.30	100	0.480	1650	790	231.0	5.3
		19.50	100	0.485	1630	790	236.0	5.3
		19.70	100	0.485	1615	785	239.5	5.4
		19.80	100	0.485	1610	780	240.0	5.4
		20.00	100	0.490	1590	780	245.0	5.4

Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
Steel 1300 - 1500 N/mm²	18.50	55	0.360	945	340	91.5	12.5
	18.70	55	0.360	935	335	92.0	12.7
	19.00	55	0.365	920	335	95.0	12.6
	19.20	55	0.365	910	330	95.5	12.8
	19.30	55	0.370	905	335	98.0	12.6
	19.50	55	0.370	900	335	100.0	12.6
	19.70	55	0.375	890	335	102.0	12.6
	19.80	55	0.375	885	330	101.5	12.7
	20.00	55	0.380	875	335	105.0	12.5
Cold work tool steel (12% Cr) high alloyed [1.2379] Stainless steel [Cr-Ni/1.4301]	18.50	70	0.360	1205	435	117.0	9.8
	18.70	70	0.360	1190	430	118.0	9.9
	19.00	70	0.365	1175	430	122.0	9.8
	19.20	70	0.365	1160	425	123.0	9.9
	19.30	70	0.370	1155	425	124.5	9.9
	19.50	70	0.370	1145	425	127.0	9.9
	19.70	70	0.375	1130	425	129.5	9.9
	19.80	70	0.375	1125	420	129.5	10.0
	20.00	70	0.380	1115	425	133.5	9.9
Titanium alloys >300 HB [Ti6Al4V]	18.50	40	0.360	690	250	67.0	17.0
	18.70	40	0.360	680	245	67.5	17.3
	19.00	40	0.365	670	245	69.5	17.3
	19.20	40	0.365	665	245	71.0	17.2
	19.30	40	0.370	660	245	71.5	17.2
	19.50	40	0.370	655	240	71.5	17.6
	19.70	40	0.375	645	240	73.0	17.5
	19.80	40	0.375	645	240	74.0	17.5
	20.00	40	0.380	635	240	75.5	17.5
Cast iron (lamellar / spheroidal)	18.50	240	0.710	4130	2930	787.5	1.5
	18.70	240	0.715	4085	2920	802.0	1.5
	19.00	240	0.720	4020	2895	821.0	1.5
	19.20	240	0.720	3980	2865	829.5	1.5
	19.30	240	0.725	3960	2870	839.5	1.5
	19.50	240	0.735	3920	2880	860.0	1.5
	19.70	240	0.735	3880	2850	868.5	1.5
	19.80	240	0.740	3860	2855	879.0	1.5
	20.00	240	0.745	3820	2845	894.0	1.5

5xd

[illegible]





Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
Steel < 500 N/mm ²		2.50	140	0.060	17825	1070	5.5	1.2
		2.60	140	0.060	17140	1030	5.5	1.2
		2.80	140	0.065	15915	1035	6.5	1.2
		2.90	140	0.070	15365	1075	7.0	1.1
		3.00	170	0.080	18040	1445	10.0	0.8
		3.30	170	0.085	16400	1395	12.0	0.9
		3.50	170	0.090	15460	1390	13.5	0.9
		3.70	170	0.095	14625	1390	15.0	0.8
		3.80	170	0.100	14240	1425	16.0	1.2
Steel 500 - 850 N/mm ²		2.50	110	0.060	14005	840	4.0	1.5
		2.60	110	0.060	13465	810	4.5	1.5
		2.80	110	0.065	12505	815	5.0	1.5
		2.90	110	0.070	12075	845	5.5	1.4
		3.00	130	0.080	13795	1105	8.0	1.1
		3.30	130	0.085	12540	1065	9.0	1.1
		3.50	130	0.090	11825	1065	10.0	1.1
		3.70	130	0.095	11185	1065	11.5	1.1
		3.80	130	0.100	10890	1090	12.5	1.5
Steel 850 - 1100 N/mm ²		2.50	80	0.045	10185	460	2.5	2.7
		2.60	80	0.045	9795	440	2.5	2.8
		2.80	80	0.050	9095	455	3.0	2.7
		2.90	80	0.050	8780	440	3.0	2.8
		3.00	110	0.060	11670	700	5.0	1.7
		3.30	110	0.065	10610	690	6.0	1.7
		3.50	110	0.070	10005	700	6.5	1.7
		3.70	110	0.075	9465	710	7.5	1.7
		3.80	110	0.075	9215	690	8.0	2.4
Steel 1100 - 1300 N/mm ²		2.50	55	0.040	7005	280	1.5	4.4
		2.60	55	0.040	6735	270	1.5	4.6
		2.80	55	0.040	6255	250	1.5	4.9
		2.90	55	0.045	6035	270	2.0	4.5
		3.00	70	0.050	7425	370	2.5	3.3
		3.30	70	0.055	6750	370	3.0	3.2
		3.50	70	0.060	6365	380	3.5	3.1
		3.70	70	0.060	6020	360	4.0	3.3
		3.80	70	0.065	5865	380	4.5	4.3

Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
Steel 1300 - 1500 N/mm ²	2.50	25	0.025	3185	80	0.5	15.6
	2.60	25	0.025	3060	75	0.5	16.5
	2.80	25	0.030	2840	85	0.5	14.4
	2.90	25	0.030	2745	80	0.5	15.3
	3.00	40	0.040	4245	170	1.0	7.1
	3.30	40	0.045	3860	175	1.5	6.8
	3.50	40	0.045	3640	165	1.5	7.2
	3.70	40	0.050	3440	170	2.0	6.9
	3.80	40	0.050	3350	170	2.0	9.7
Cold work tool steel (12% Cr) high alloyed [1.2379] Stainless steel [Cr-Ni/1.4301]	2.50	50	0.030	6365	190	1.0	6.6
	2.60	50	0.035	6120	215	1.0	5.7
	2.80	50	0.035	5685	200	1.0	6.1
	2.90	50	0.035	5490	190	1.5	6.4
	3.00	60	0.045	6365	285	2.0	4.3
	3.30	60	0.050	5785	290	2.5	4.1
	3.50	60	0.055	5455	300	3.0	3.9
	3.70	60	0.055	5160	285	3.0	4.1
	3.80	60	0.060	5025	300	3.5	5.5
Cast iron (lamellar / spheroidal)	2.50	160	0.065	20370	1325	6.5	0.9
	2.60	160	0.065	19590	1275	7.0	1.0
	2.80	160	0.070	18190	1275	8.0	1.0
	2.90	160	0.075	17560	1315	8.5	0.9
	3.00	220	0.085	23345	1985	14.0	0.6
	3.30	220	0.095	21220	2015	17.0	0.6
	3.50	220	0.100	20010	2000	19.0	0.6
	3.70	220	0.105	18925	1985	21.5	0.6
	3.80	220	0.110	18430	2025	23.0	0.8
Wrought aluminium alloys Si < 6%	2.50	220	0.050	28010	1400	7.0	0.9
	2.60	220	0.050	26935	1345	7.0	0.9
	2.80	220	0.055	25010	1375	8.5	0.9
	2.90	220	0.060	24150	1450	9.5	0.8
	3.00	250	0.065	26525	1725	12.0	0.7
	3.30	250	0.075	24115	1810	15.5	0.7
	3.50	250	0.080	22735	1820	17.5	0.7
	3.70	250	0.080	21505	1720	18.5	0.7
	3.80	250	0.085	20940	1780	20.0	0.9

Spiral flute drills Supradrill® U

5xd



Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500				Inox Stainless		GG(G) Aluminium
-------------	----------------	-----------------	-----------------	--	--	--	-------------------	--	--------------------


Example: Order-N°. Article-N°. B62015 ø-Code .0250

Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
	Steel < 500 N/mm²	4.00	170	0.105	13530	1420	18.0	1.1
		4.20	170	0.110	12885	1415	19.5	1.1
		4.40	170	0.115	12300	1415	21.5	1.1
		4.50	170	0.120	12025	1445	23.0	1.1
		4.80	170	0.125	11275	1410	25.5	1.5
		5.00	170	0.130	10825	1405	27.5	1.5
		5.20	170	0.135	10405	1405	30.0	1.5
		5.30	170	0.140	10210	1430	31.5	1.4
		5.50	170	0.145	9840	1425	34.0	1.5
		5.50	170	0.145	9840	1425	34.0	1.5
	Steel 500 - 850 N/mm²	4.00	130	0.105	10345	1085	13.5	1.5
		4.20	130	0.110	9850	1085	15.0	1.5
		4.40	130	0.115	9405	1080	16.5	1.5
		4.50	130	0.120	9195	1105	17.5	1.4
		4.80	130	0.125	8620	1080	19.5	1.9
		5.00	130	0.130	8275	1075	21.0	1.9
		5.20	130	0.135	7960	1075	23.0	1.9
		5.30	130	0.140	7810	1095	24.0	1.9
		5.50	130	0.145	7525	1090	26.0	1.9
		5.50	130	0.145	7525	1090	26.0	1.9
	Steel 850 - 1100 N/mm²	4.00	110	0.080	8755	700	9.0	2.3
		4.20	110	0.085	8335	710	10.0	2.3
		4.40	110	0.090	7960	715	11.0	2.2
		4.50	110	0.090	7780	700	11.0	2.3
		4.80	110	0.095	7295	695	12.5	3.0
		5.00	110	0.100	7005	700	13.5	3.0
		5.20	110	0.105	6735	705	15.0	2.9
		5.30	110	0.105	6605	695	15.5	3.0
		5.50	110	0.110	6365	700	16.5	3.0
		5.50	110	0.110	6365	700	16.5	3.0
	Steel 1100 - 1300 N/mm²	4.00	70	0.065	5570	360	4.5	4.5
		4.20	70	0.070	5305	370	5.0	4.3
		4.40	70	0.075	5065	380	6.0	4.2
		4.50	70	0.075	4950	370	6.0	4.3
		4.80	70	0.080	4640	370	6.5	5.6
		5.00	70	0.085	4455	380	7.5	5.5
		5.20	70	0.085	4285	365	8.0	5.7
		5.30	70	0.090	4205	380	8.5	5.5
		5.50	70	0.090	4050	365	8.5	5.7
		5.50	70	0.090	4050	365	8.5	5.7

Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
Steel 1300 - 1500 N/mm²	4.00	40	0.055	3185	175	2.0	9.2
	4.20	40	0.055	3030	165	2.5	9.7
	4.40	40	0.060	2895	175	2.5	9.1
	4.50	40	0.060	2830	170	2.5	9.4
	4.80	40	0.065	2655	175	3.0	11.8
	5.00	40	0.065	2545	165	3.0	12.7
	5.20	40	0.070	2450	170	3.5	12.2
	5.30	40	0.070	2400	170	4.0	12.2
	5.50	40	0.075	2315	175	4.0	11.8
	5.50	40	0.075	2315	175	4.0	11.8
Cold work tool steel (12% Cr) high alloyed [1.2379] Stainless steel [Cr-Ni/1.4301]	4.00	60	0.060	4775	285	3.5	5.7
	4.20	60	0.065	4545	295	4.0	5.5
	4.40	60	0.070	4340	305	4.5	5.2
	4.50	60	0.070	4245	295	4.5	5.4
	4.80	60	0.075	3980	300	5.5	6.9
	5.00	60	0.075	3820	285	5.5	7.3
	5.20	60	0.080	3675	295	6.5	7.0
	5.30	60	0.080	3605	290	6.5	7.1
	5.50	60	0.085	3470	295	7.0	7.0
	5.50	60	0.085	3470	295	7.0	7.0
Cast iron (lamellar / spheroidal)	4.00	220	0.115	17505	2015	25.5	0.8
	4.20	220	0.120	16675	2000	27.5	0.8
	4.40	220	0.125	15915	1990	30.5	0.8
	4.50	220	0.130	15560	2025	32.0	0.8
	4.80	220	0.135	14590	1970	35.5	1.0
	5.00	220	0.145	14005	2030	40.0	1.0
	5.20	220	0.150	13465	2020	43.0	1.0
	5.30	220	0.150	13215	1980	43.5	1.0
	5.50	220	0.155	12730	1975	47.0	1.0
	5.50	220	0.155	12730	1975	47.0	1.0
Wrought aluminium alloys Si < 6%	4.00	250	0.090	19895	1790	22.5	0.9
	4.20	250	0.095	18945	1800	25.0	0.9
	4.40	250	0.100	18085	1810	27.5	0.9
	4.50	250	0.100	17685	1770	28.0	0.9
	4.80	250	0.105	16580	1740	31.5	1.2
	5.00	250	0.110	15915	1750	34.5	1.2
	5.20	250	0.115	15305	1760	37.5	1.2
	5.30	250	0.120	15015	1800	39.5	1.2
	5.50	250	0.120	14470	1735	41.0	1.2
	5.50	250	0.120	14470	1735	41.0	1.2


Spiral flute drills Supradrill® U

5xd




Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500				Inox Stainless		GG(G) Aluminium
-------------	----------------	-----------------	-----------------	--	--	--	-------------------	--	--------------------

Example: Order-N°.							NANO-U ²	
Article-N°.							B62015	
ø-Code							B63015	
ø Code	d1 m7	d2 h6	l1	l2	l4	L _{max}		
.0390	3.90	6	74	36	36	27.4		●
.0400	4.00	6	74	36	36	26.9		●
.0410	4.10	6	74	36	36	26.9		●
.0420	4.20	6	74	36	36	26.8		●
.0430	4.30	6	74	36	36	26.8		●
.0440	4.40	6	74	36	36	26.6		●
.0445	4.45	6	74	36	36	26.6		●
.0450	4.50	6	74	36	36	26.6		●
.0460	4.60	6	74	36	36	26.5		●
.0470	4.70	6	74	36	36	26.5		●
.0480	4.80	6	82	44	36	34.4		●
.0490	4.90	6	82	44	36	34.4		●
.0495	4.95	6	82	44	36	34.3		●
.0500	5.00	6	82	44	36	34.8		●
.0505	5.05	6	82	44	36	34.7		●
.0510	5.10	6	82	44	36	34.7		●
.0520	5.20	6	82	44	36	34.6		●
.0525	5.25	6	82	44	36	34.6		●
.0530	5.30	6	82	44	36	34.6		●
.0540	5.40	6	82	44	36	34.5		●
.0550	5.50	6	82	44	36	34.5		●
.0560	5.60	6	82	44	36	34.4		●
.0565	5.65	6	82	44	36	34.4		●

Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
	Steel < 500 N/mm ²	5.80	170	0.155	9330	1445	38.0	1.4
		6.00	170	0.160	9020	1445	41.0	1.4
		6.20	170	0.165	8730	1440	43.5	1.7
		6.50	170	0.170	8325	1415	47.0	1.7
		6.80	170	0.180	7960	1435	52.0	1.7
		7.00	170	0.185	7730	1430	55.0	1.7
		7.20	170	0.190	7515	1430	58.0	1.7
		7.40	170	0.195	7315	1425	61.5	1.7
		7.50	170	0.195	7215	1405	62.0	1.7
		7.50	170	0.195	7215	1405	62.0	1.7
	Steel 500 - 850 N/mm ²	5.80	130	0.155	7135	1105	29.0	1.9
		6.00	130	0.160	6895	1105	31.0	1.9
		6.20	130	0.165	6675	1100	33.0	2.2
		6.50	130	0.170	6365	1080	36.0	2.3
		6.80	130	0.180	6085	1095	40.0	2.2
		7.00	130	0.185	5910	1095	42.0	2.2
		7.20	130	0.190	5745	1090	44.5	2.2
		7.40	130	0.195	5590	1090	47.0	2.2
		7.50	130	0.195	5515	1075	47.5	2.3
		7.50	130	0.195	5515	1075	47.5	2.3
	Steel 850 - 1100 N/mm ²	5.80	110	0.115	6035	695	18.5	3.0
		6.00	110	0.120	5835	700	20.0	3.0
		6.20	110	0.125	5645	705	21.5	3.5
		6.50	110	0.130	5385	700	23.0	3.5
		6.80	110	0.135	5150	695	25.0	3.5
		7.00	110	0.140	5000	700	27.0	3.5
		7.20	110	0.145	4865	705	28.5	3.5
		7.40	110	0.150	4730	710	30.5	3.4
		7.50	110	0.150	4670	700	31.0	3.5
		7.50	110	0.150	4670	700	31.0	3.5
	Steel 1100 - 1300 N/mm ²	5.80	70	0.095	3840	365	9.5	5.7
		6.00	70	0.100	3715	370	10.5	5.6
		6.20	70	0.105	3595	375	11.5	6.6
		6.50	70	0.110	3430	375	12.5	6.6
		6.80	70	0.115	3275	375	13.5	6.5
		7.00	70	0.115	3185	365	14.0	6.7
		7.20	70	0.120	3095	370	15.0	6.6
		7.40	70	0.125	3010	375	16.0	6.5
		7.50	70	0.125	2970	370	16.5	6.6
		7.50	70	0.125	2970	370	16.5	6.6
Material		d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
Steel 1300 - 1500 N/mm ²		5.80	40	0.075	2195	165	4.5	12.5
		6.00	40	0.080	2120	170	5.0	12.2
		6.20	40	0.085	2055	175	5.5	14.1
		6.50	40	0.085	1960	165	5.5	14.9
		6.80	40	0.090	1870	170	6.0	14.4
		7.00	40	0.095	1820	175	6.5	14.0
		7.20	40	0.095	1770	170	7.0	14.3
		7.40	40	0.100	1720	170	7.5	14.3
		7.50	40	0.100	1700	170	7.5	14.3
		7.50	40	0.100	1700	170	7.5	14.3
Cold work tool steel (12% Cr) high alloyed [1.2379] Stainless steel [Cr-Ni/1.4301]		5.80	60	0.090	3295	295	8.0	7.0
		6.00	60	0.090	3185	285	8.0	7.3
		6.20	60	0.095	3080	295	9.0	8.4
		6.50	60	0.100	2940	295	10.0	8.3
		6.80	60	0.105	2810	295	10.5	8.3
		7.00	60	0.110	2730	300	11.5	8.1
		7.20	60	0.110	2655	290	12.0	8.4
		7.40	60	0.115	2580	295	12.5	8.2
		7.50	60	0.115	2545	295	13.0	8.2
		7.50	60	0.115	2545	295	13.0	8.2
Cast iron (lamellar / spheroidal)		5.80	220	0.165	12075	1990	52.5	1.0
		6.00	220	0.170	11670	1985	56.0	1.0
		6.20	220	0.175	11295	1975	59.5	1.3
		6.50	220	0.185	10775	1995	66.0	1.2
		6.80	220	0.195	10300	2010	73.0	1.2
		7.00	220	0.200	10005	2000	77.0	1.2
		7.20	220	0.205	9725	1995	81.0	1.2
		7.40	220	0.210	9465	1990	85.5	1.2
		7.50	220	0.215	9335	2005	88.5	1.2
		7.50	220	0.215	9335	2005	88.5	1.2
Wrought aluminium alloys Si < 6%		5.80	250	0.130	13720	1785	47.0	1.2
		6.00	250	0.135	13265	1790	50.5	1.2
		6.20	250	0.140	12835	1795	54.0	1.4
		6.50	250	0.145	12245	1775	59.0	1.4
		6.80	250	0.150	11705	1755	63.5	1.4
		7.00	250	0.155	11370	1760	67.5	1.4
		7.20	250	0.160	11050	1770	72.0	1.4
		7.40	250	0.165	10755	1775	76.5	1.4
		7.50	250	0.165	10610	1750	77.5	1.4
		7.50	250	0.165	10610	1750	77.5	1.4

Spiral flute drills Supradrill® U

5xd

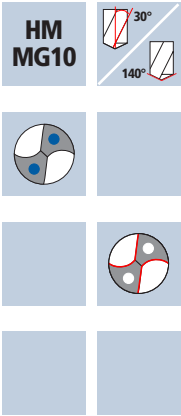

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500				Inox Stainless		GG(G) Aluminium
-------------	----------------	-----------------	-----------------	--	--	--	-------------------	--	--------------------




Example: Order-N°.							Article-N°.		ø-Code		NANO-U ²	
							B62015		.0570		B62015	
											B63015	
ø Code	d1 m7	d2 h6	l1	l2	l4	L _{max}						
.0570	5.70	6	82	44	36	34.4					●	
.0575	5.75	6	82	44	36	34.4					●	
.0580	5.80	6	82	44	36	34.4					●	
.0590	5.90	6	82	44	36	34.5					●	
.0600	6.00	6	82	44	36	34.5					●	
.0610	6.10	8	91	53	36	41.4					●	
.0620	6.20	8	91	53	36	41.2					●	
.0630	6.30	8	91	53	36	41.2					●	
.0640	6.40	8	91	53	36	41.1					●	
.0650	6.50	8	91	53	36	41.1					●	
.0660	6.60	8	91	53	36	41.0					●	
.0670	6.70	8	91	53	36	41.0					●	
.0680	6.80	8	91	53	36	40.9					●	
.0690	6.90	8	91	53	36	40.9					●	
.0700	7.00	8	91	53	36	40.7					●	
.0710	7.10	8	91	53	36	40.7					●	
.0720	7.20	8	91	53	36	40.6					●	
.0725	7.25	8	91	53	36	40.6					●	
.0730	7.30	8	91	53	36	40.6					●	
.0740	7.40	8	91	53	36	40.5					●	
.0745	7.45	8	91	53	36	40.4					●	
.0750	7.50	8	91	53	36	40.5					●	
.0755	7.55	8	91	53	36	40.4					●	

Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
	Steel < 500 N/mm²	7.60	170	0.200	7120	1425	64.5	1.7
		7.80	170	0.205	6940	1425	68.0	1.7
		8.00	170	0.210	6765	1420	71.5	1.7
		8.20	170	0.215	6600	1420	75.0	2.0
		8.50	170	0.225	6365	1430	81.0	1.9
		8.80	170	0.230	6150	1415	86.0	1.9
		9.00	170	0.235	6015	1415	90.0	1.9
		9.20	170	0.240	5880	1410	93.5	1.9
		9.40	170	0.245	5755	1410	98.0	1.9
Steel 500 - 850 N/mm²	7.60	130	0.200	5445	1090	49.5	2.2	
	7.80	130	0.205	5305	1090	52.0	2.2	
	8.00	130	0.210	5175	1085	54.5	2.2	
	8.20	130	0.215	5045	1085	57.5	2.6	
	8.50	130	0.225	4870	1095	62.0	2.5	
	8.80	130	0.230	4700	1080	65.5	2.6	
	9.00	130	0.235	4600	1080	68.5	2.5	
	9.20	130	0.240	4500	1080	72.0	2.5	
	9.40	130	0.245	4400	1080	75.0	2.5	
Steel 850 - 1100 N/mm²	7.60	110	0.150	4605	690	31.5	3.5	
	7.80	110	0.155	4490	695	33.0	3.5	
	8.00	110	0.160	4375	700	35.0	3.5	
	8.20	110	0.165	4270	705	37.0	3.9	
	8.50	110	0.170	4120	700	39.5	3.9	
	8.80	110	0.175	3980	695	42.5	4.0	
	9.00	110	0.180	3890	700	44.5	3.9	
	9.20	110	0.185	3805	705	47.0	3.9	
	9.40	110	0.190	3725	710	49.5	3.8	
Steel 1100 - 1300 N/mm²	7.60	70	0.125	2930	365	16.5	6.6	
	7.80	70	0.130	2855	370	17.5	6.6	
	8.00	70	0.135	2785	375	19.0	6.5	
	8.20	70	0.135	2715	365	19.5	7.6	
	8.50	70	0.140	2620	365	20.5	7.6	
	8.80	70	0.145	2530	365	22.0	7.5	
	9.00	70	0.150	2475	370	23.5	7.4	
	9.20	70	0.155	2420	375	25.0	7.3	
	9.40	70	0.155	2370	365	25.5	7.5	

Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
Steel 1300 - 1500 N/mm²	7.60	40	0.100	1675	170	7.5	14.3
	7.80	40	0.105	1630	170	8.0	14.3
	8.00	40	0.105	1590	165	8.5	14.7
	8.20	40	0.110	1555	170	9.0	16.3
	8.50	40	0.115	1500	175	10.0	15.8
	8.80	40	0.115	1445	165	10.0	16.7
	9.00	40	0.120	1415	170	11.0	16.1
	9.20	40	0.125	1385	175	11.5	15.6
	9.40	40	0.125	1355	170	12.0	16.1
Cold work tool steel (12% Cr) high alloyed [1.2379] Stainless steel [Cr-Ni/1.4301]	7.60	60	0.115	2515	290	13.0	8.4
	7.80	60	0.120	2450	295	14.0	8.2
	8.00	60	0.125	2385	300	15.0	8.1
	8.20	60	0.125	2330	290	15.5	9.6
	8.50	60	0.130	2245	290	16.5	9.5
	8.80	60	0.135	2170	295	18.0	9.3
	9.00	60	0.140	2120	295	19.0	9.3
	9.20	60	0.140	2075	290	19.5	9.4
	9.40	60	0.145	2030	295	20.5	9.3
Cast iron (lamellar / spheroidal)	7.60	220	0.215	9215	1980	90.0	1.2
	7.80	220	0.225	8980	2020	96.5	1.2
	8.00	220	0.230	8755	2015	101.5	1.2
	8.20	220	0.235	8540	2005	106.0	1.4
	8.50	220	0.245	8240	2020	114.5	1.4
	8.80	220	0.250	7960	1990	121.0	1.4
	9.00	220	0.255	7780	1985	126.5	1.4
	9.20	220	0.265	7610	2015	134.0	1.4
	9.40	220	0.270	7450	2010	139.5	1.4
Wrought aluminium alloys Si < 6%	7.60	250	0.170	10470	1780	80.5	1.4
	7.80	250	0.175	10200	1785	85.5	1.4
	8.00	250	0.180	9945	1790	90.0	1.4
	8.20	250	0.180	9705	1745	92.0	1.6
	8.50	250	0.190	9360	1780	101.0	1.6
	8.80	250	0.195	9045	1765	107.5	1.6
	9.00	250	0.200	8840	1770	112.5	1.5
	9.20	250	0.205	8650	1775	118.0	1.5
	9.40	250	0.210	8465	1780	123.5	1.5

Spiral flute drills Supradrill® U

5xd



Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500				Inox Stainless		GG(G) Aluminium
-------------	----------------	-----------------	-----------------	--	--	--	-------------------	--	--------------------




Example: Order-N°.							Article-N°.		ø-Code				NANO-U ²	
							B62015		.0760				B62015	
													B63015	
ø Code	d1 m7	d2 h6	l1	l2	l4	L _{max}								
.0760	7.60	8	91	53	36	40.4							●	
.0765	7.65	8	91	53	36	40.4							●	
.0770	7.70	8	91	53	36	40.4							●	
.0780	7.80	8	91	53	36	40.4							●	
.0790	7.90	8	91	53	36	40.4							●	
.0800	8.00	8	91	53	36	40.4							●	
.0810	8.10	10	103	61	40	46.3							●	
.0820	8.20	10	103	61	40	46.2							●	
.0830	8.30	10	103	61	40	46.2							●	
.0840	8.40	10	103	61	40	46.1							●	
.0850	8.50	10	103	61	40	46.1							●	
.0860	8.60	10	103	61	40	46.0							●	
.0870	8.70	10	103	61	40	46.0							●	
.0875	8.75	10	103	61	40	45.9							●	
.0880	8.80	10	103	61	40	45.9							●	
.0885	8.85	10	103	61	40	45.8							●	
.0890	8.90	10	103	61	40	45.8							●	
.0900	9.00	10	103	61	40	45.7							●	
.0910	9.10	10	103	61	40	45.7							●	
.0920	9.20	10	103	61	40	45.6							●	
.0925	9.25	10	103	61	40	45.5							●	
.0930	9.30	10	103	61	40	45.6							●	
.0940	9.40	10	103	61	40	45.5							●	

Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
	Steel < 500 N/mm²	9.50	170	0.250	5695	1425	101.0	1.9
		9.60	170	0.255	5635	1435	104.0	1.9
		9.80	170	0.260	5520	1435	108.0	1.9
		10.00	170	0.265	5410	1435	112.5	1.9
		10.20	170	0.270	5305	1430	117.0	2.2
		10.50	170	0.275	5155	1420	123.0	2.2
		10.80	170	0.285	5010	1430	131.0	2.2
		11.00	170	0.290	4920	1425	135.5	2.2
		11.50	170	0.305	4705	1435	149.0	2.2
			Steel 500 - 850 N/mm²	9.50	130	0.250	4355	1090
9.60	130			0.255	4310	1100	79.5	2.5
9.80	130			0.260	4220	1095	82.5	2.5
10.00	130			0.265	4140	1095	86.0	2.5
10.20	130			0.270	4055	1095	89.5	2.9
10.50	130			0.275	3940	1085	94.0	2.9
10.80	130			0.285	3830	1090	100.0	2.9
11.00	130			0.290	3760	1090	103.5	2.9
11.50	130			0.305	3600	1100	114.5	2.9
	Steel 850 - 1100 N/mm²			9.50	110	0.190	3685	700
		9.60	110	0.190	3645	695	50.5	3.9
		9.80	110	0.195	3575	695	52.5	3.9
		10.00	110	0.200	3500	700	55.0	3.9
		10.20	110	0.205	3435	705	57.5	4.5
		10.50	110	0.210	3335	700	60.5	4.5
		10.80	110	0.215	3240	695	63.5	4.6
		11.00	110	0.220	3185	700	66.5	4.5
		11.50	110	0.230	3045	700	72.5	4.5
			Steel 1100 - 1300 N/mm²	9.50	70	0.160	2345	375
9.60	70			0.160	2320	370	27.0	7.4
9.80	70			0.165	2275	375	28.5	7.2
10.00	70			0.165	2230	370	29.0	7.4
10.20	70			0.170	2185	370	30.0	8.6
10.50	70			0.175	2120	370	32.0	8.6
10.80	70			0.180	2065	370	34.0	8.6
11.00	70			0.185	2025	375	35.5	8.4
11.50	70			0.190	1940	370	38.5	8.5

Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
Steel 1300 - 1500 N/mm²	9.50	40	0.125	1340	170	12.0	16.0
	9.60	40	0.130	1325	170	12.5	16.0
	9.80	40	0.130	1300	170	13.0	16.0
	10.00	40	0.135	1275	170	13.5	16.0
	10.20	40	0.135	1250	170	14.0	18.8
	10.50	40	0.140	1215	170	14.5	18.7
	10.80	40	0.145	1180	170	15.5	18.6
	11.00	40	0.145	1155	165	15.5	19.2
	11.50	40	0.155	1105	170	17.5	18.5
	Cold work tool steel (12% Cr) high alloyed [1.2379] Stainless steel [Cr-Ni/1.4301]	9.50	60	0.145	2010	290	20.5
9.60		60	0.150	1990	300	21.5	9.1
9.80		60	0.150	1950	295	22.5	9.2
10.00		60	0.155	1910	295	23.0	9.2
10.20		60	0.155	1870	290	23.5	11.0
10.50		60	0.160	1820	290	25.0	11.0
10.80		60	0.165	1770	290	26.5	10.9
11.00		60	0.170	1735	295	28.0	10.7
11.50		60	0.175	1660	290	30.0	10.8
Cast iron (lamellar / spheroidal)		9.50	220	0.270	7370	1990	141.0
	9.60	220	0.275	7295	2005	145.0	1.4
	9.80	220	0.280	7145	2000	151.0	1.4
	10.00	220	0.285	7005	1995	156.5	1.4
	10.20	220	0.290	6865	1990	162.5	1.6
	10.50	220	0.300	6670	2000	173.0	1.6
	10.80	220	0.310	6485	2010	184.0	1.6
	11.00	220	0.315	6365	2005	190.5	1.6
	11.50	220	0.330	6090	2010	209.0	1.6
	Wrought aluminium alloys Si < 6%	9.50	250	0.210	8375	1760	125.0
9.60		250	0.215	8290	1780	129.0	1.5
9.80		250	0.220	8120	1785	134.5	1.5
10.00		250	0.220	7960	1750	137.5	1.6
10.20		250	0.225	7800	1755	143.5	1.8
10.50		250	0.235	7580	1780	154.0	1.8
10.80		250	0.240	7370	1770	162.0	1.8
11.00		250	0.245	7235	1775	168.5	1.8


Spiral flute drills Supradrill® U

5xd






Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500				Inox Stainless		GG(G) Aluminium
-------------	----------------	-----------------	-----------------	--	--	--	-------------------	--	--------------------

Example: Order-N°.							Article-N°.		ø-Code		NANO-U ²	
							B62015		.0950		B62015	
											B63015	
ø Code	d1 m7	d2 h6	l1	l2	l4	L _{max}						
.0950	9.50	10	103	61	40	45.5					●	
.0955	9.55	10	103	61	40	45.4					●	
.0960	9.60	10	103	61	40	45.4					●	
.0965	9.65	10	103	61	40	45.3					●	
.0970	9.70	10	103	61	40	45.4					●	
.0980	9.80	10	103	61	40	45.3					●	
.0990	9.90	10	103	61	40	45.4					●	
.1000	10.00	10	103	61	40	45.4					●	
.1010	10.10	12	118	71	45	53.3					●	
.1020	10.20	12	118	71	45	53.2					●	
.1030	10.30	12	118	71	45	53.2					●	
.1040	10.40	12	118	71	45	53.1					●	
.1050	10.50	12	118	71	45	53.1					●	
.1060	10.60	12	118	71	45	53.0					●	
.1070	10.70	12	118	71	45	52.9					●	
.1080	10.80	12	118	71	45	52.8					●	
.1090	10.90	12	118	71	45	52.8					●	
.1100	11.00	12	118	71	45	52.7					●	
.1110	11.10	12	118	71	45	52.7					●	
.1120	11.20	12	118	71	45	52.6					●	
.1130	11.30	12	118	71	45	52.6					●	
.1140	11.40	12	118	71	45	52.5					●	
.1150	11.50	12	118	71	45	52.4					●	

Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
	Steel < 500 N/mm ²	11.80	170	0.310	4585	1420	155.5	2.2
		12.00	170	0.315	4510	1420	160.5	2.2
		12.20	170	0.320	4435	1420	166.0	2.4
		12.50	170	0.330	4330	1430	175.5	2.4
		12.80	170	0.335	4230	1415	182.0	2.4
		13.00	170	0.340	4165	1415	188.0	2.4
		13.20	170	0.345	4100	1415	193.5	2.4
		13.50	170	0.355	4010	1425	204.0	2.3
		13.80	170	0.365	3920	1430	214.0	2.3
		13.80	130	0.365	3000	1095	164.0	3.0
	Steel 500 - 850 N/mm ²	11.80	130	0.310	3505	1085	118.5	2.9
		12.00	130	0.315	3450	1085	122.5	2.9
		12.20	130	0.320	3390	1085	127.0	3.1
		12.50	130	0.330	3310	1090	134.0	3.1
		12.80	130	0.335	3235	1085	139.5	3.1
		13.00	130	0.340	3185	1085	144.0	3.1
		13.20	130	0.345	3135	1080	148.0	3.1
		13.50	130	0.355	3065	1090	156.0	3.0
		13.80	130	0.365	3000	1095	164.0	3.0
		13.80	110	0.365	2535	695	104.0	4.8
	Steel 850 - 1100 N/mm ²	11.80	110	0.235	2965	695	76.0	4.5
		12.00	110	0.240	2920	700	79.0	4.5
		12.20	110	0.245	2870	705	82.5	4.8
		12.50	110	0.250	2800	700	86.0	4.8
		12.80	110	0.255	2735	695	89.5	4.8
		13.00	110	0.260	2695	700	93.0	4.8
		13.20	110	0.265	2655	705	96.5	4.7
		13.50	110	0.270	2595	700	100.0	4.7
		13.80	110	0.275	2535	695	104.0	4.8
		13.80	70	0.230	1615	370	55.5	9.0
	Steel 1100 - 1300 N/mm ²	11.80	70	0.195	1890	370	40.5	8.5
		12.00	70	0.200	1855	370	42.0	8.5
		12.20	70	0.205	1825	375	44.0	9.0
		12.50	70	0.210	1785	375	46.0	9.0
		12.80	70	0.215	1740	375	48.5	8.9
		13.00	70	0.215	1715	370	49.0	9.0
		13.20	70	0.220	1690	370	50.5	9.0
		13.50	70	0.225	1650	370	53.0	9.0
		13.80	70	0.230	1615	370	55.5	9.0
		13.80	40	0.185	925	170	25.5	19.5
	Steel 1300 - 1500 N/mm ²	11.80	40	0.155	1080	165	18.0	19.0
		12.00	40	0.160	1060	170	19.0	18.5
		12.20	40	0.165	1045	170	20.0	19.8
		12.50	40	0.165	1020	170	21.0	19.8
		12.80	40	0.170	995	170	22.0	19.7
		13.00	40	0.175	980	170	22.5	19.7
		13.20	40	0.175	965	170	23.5	19.6
		13.50	40	0.180	945	170	24.5	19.5
		13.80	40	0.185	925	170	25.5	19.5
		13.80	60	0.185	1590	295	33.5	10.6
	Cold work tool steel (12% Cr) high alloyed [1.2379] Stainless steel [Cr-Ni/1.4301]	11.80	60	0.180	1620	290	31.5	10.8
		12.00	60	0.185	1590	295	33.5	10.6
		12.20	60	0.190	1565	295	34.5	11.4
		12.50	60	0.190	1530	290	35.5	11.6
		12.80	60	0.195	1490	290	37.5	11.5
		13.00	60	0.200	1470	295	39.0	11.3
		13.20	60	0.205	1445	295	40.5	11.3
		13.50	60	0.210	1415	295	42.0	11.3
		13.80	60	0.210	1385	290	43.5	11.4
		13.80	220	0.395	5075	2005	300.0	1.7
	Cast iron (lamellar / spheroidal)	11.80	220	0.335	5935	1990	217.5	1.6
		12.00	220	0.345	5835	2015	228.0	1.6
		12.20	220	0.350	5740	2010	235.0	1.7
		12.50	220	0.355	5600	1990	244.0	1.7
		12.80	220	0.365	5470	1995	256.5	1.7
		13.00	220	0.370	5385	1990	264.0	1.7
		13.20	220	0.375	5305	1990	272.5	1.7
		13.50	220	0.385	5185	1995	285.5	1.7
		13.80	220	0.395	5075	2005	300.0	1.7
		13.80	250	0.305	5765	1760	263.0	1.9
	Wrought aluminium alloys Si < 6%	11.80	250	0.260	6745	1755	192.0	1.8
		12.00	250	0.265	6630	1755	198.5	1.8
		12.20	250	0.270	6525	1760	205.5	1.9
		12.50	250	0.280	6365	1780	218.5	1.9
		12.80	250	0.285	6215	1770	228.0	1.9
		13.00	250	0.290	6120	1775	235.5	1.9
		13.20	250	0.295	6030	1780	243.5	1.9
		13.50	250	0.300	5895	1770	253.5	1.9
		13.80	250	0.305	5765	1760	263.0	1.9


Spiral flute drills Supradrill® U

5xd



Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500				Inox Stainless		GG(G) Aluminium
-------------	----------------	-----------------	-----------------	--	--	--	-------------------	--	--------------------



Example: Order-N°.							Article-N°.		ø-Code		NANO-U ²	
							B62015		.1160		B62015	
											B63015	
ø Code	d1 m7	d2 h6	l1	l2	l4	L _{max}						
.1160	11.60	12	118	71	45	52.4					●	
.1170	11.70	12	118	71	45	52.4					●	
.1180	11.80	12	118	71	45	52.3					●	
.1190	11.90	12	118	71	45	52.4					●	
.1200	12.00	12	118	71	45	52.3					●	
.1210	12.10	14	124	77	45	56.3					●	
.1220	12.20	14	124	77	45	56.2					●	
.1230	12.30	14	124	77	45	56.2					●	
.1240	12.40	14	124	77	45	56.1					●	
.1250	12.50	14	124	77	45	56.1					●	
.1260	12.60	14	124	77	45	56.0					●	
.1270	12.70	14	124	77	45	55.9					●	
.1280	12.80	14	124	77	45	55.8					●	
.1290	12.90	14	124	77	45	55.8					●	
.1300	13.00	14	124	77	45	55.7					●	
.1310	13.10	14	124	77	45	55.7					●	
.1320	13.20	14	124	77	45	55.6					●	
.1330	13.30	14	124	77	45	55.6					●	
.1340	13.40	14	124	77	45	55.4					●	
.1350	13.50	14	124	77	45	55.4					●	
.1360	13.60	14	124	77	45	55.3					●	
.1370	13.70	14	124	77	45	55.4					●	
.1380	13.80	14	124	77	45	55.3					●	

Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
	Steel < 500 N/mm ²	14.00	170	0.370	3865	1430	220.0	2.3
		14.20	170	0.375	3810	1430	226.5	2.5
		14.50	170	0.380	3730	1415	233.5	2.5
		14.80	170	0.390	3655	1425	245.0	2.5
		15.00	170	0.395	3610	1425	252.0	2.5
		15.20	170	0.400	3560	1425	258.5	2.5
		15.50	170	0.410	3490	1430	270.0	2.4
		15.80	170	0.415	3425	1420	278.5	2.5
		16.00	170	0.420	3380	1420	285.5	2.5
		16.00	170	0.420	3380	1420	285.5	2.5
	Steel 500 - 850 N/mm ²	14.00	130	0.370	2955	1095	168.5	3.0
		14.20	130	0.375	2915	1095	173.5	3.2
		14.50	130	0.380	2855	1085	179.0	3.3
		14.80	130	0.390	2795	1090	187.5	3.2
		15.00	130	0.395	2760	1090	192.5	3.2
		15.20	130	0.400	2720	1090	198.0	3.2
		15.50	130	0.410	2670	1095	206.5	3.2
		15.80	130	0.415	2620	1085	212.5	3.2
		16.00	130	0.420	2585	1085	218.0	3.2
		16.00	130	0.420	2585	1085	218.0	3.2
	Steel 850 - 1100 N/mm ²	14.00	110	0.280	2500	700	108.0	4.7
		14.20	110	0.285	2465	705	111.5	5.0
		14.50	110	0.290	2415	700	115.5	5.1
		14.80	110	0.295	2365	700	120.5	5.0
		15.00	110	0.300	2335	700	123.5	5.0
		15.20	110	0.305	2305	705	128.0	5.0
		15.50	110	0.310	2260	700	132.0	5.0
		15.80	110	0.315	2215	700	137.0	5.0
		16.00	110	0.320	2190	700	140.5	5.0
		16.00	110	0.320	2190	700	140.5	5.0
	Steel 1100 - 1300 N/mm ²	14.00	70	0.235	1590	375	57.5	8.8
		14.20	70	0.235	1570	370	58.5	9.6
		14.50	70	0.240	1535	370	61.0	9.6
		14.80	70	0.245	1505	370	63.5	9.5
		15.00	70	0.250	1485	370	65.5	9.5
		15.20	70	0.255	1465	375	68.0	9.4
		15.50	70	0.260	1440	375	71.0	9.3
		15.80	70	0.265	1410	375	73.5	9.3
		16.00	70	0.265	1395	370	74.5	9.5
		16.00	70	0.265	1395	370	74.5	9.5

Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
Steel 1300 - 1500 N/mm ²	14.00	40	0.185	910	170	26.0	19.5
	14.20	40	0.190	895	170	27.0	20.9
	14.50	40	0.195	880	170	28.0	20.8
	14.80	40	0.195	860	170	29.0	20.8
	15.00	40	0.200	850	170	30.0	20.7
	15.20	40	0.205	840	170	31.0	20.7
	15.50	40	0.205	820	170	32.0	20.6
	15.80	40	0.210	805	170	33.5	20.6
	16.00	40	0.215	795	170	34.0	20.6
	16.00	40	0.215	795	170	34.0	20.6
Cold work tool steel (12% Cr) high alloyed [1.2379] Stainless steel [Cr-Ni/1.4301]	14.00	60	0.215	1365	295	45.5	11.2
	14.20	60	0.220	1345	295	46.5	12.0
	14.50	60	0.225	1315	295	48.5	12.0
	14.80	60	0.230	1290	295	50.5	12.0
	15.00	60	0.230	1275	295	52.0	11.9
	15.20	60	0.235	1255	295	53.5	11.9
	15.50	60	0.240	1230	295	55.5	11.9
	15.80	60	0.245	1210	295	58.0	11.9
	16.00	60	0.245	1195	295	59.5	11.9
	16.00	60	0.245	1195	295	59.5	11.9
Cast iron (lamellar / spheroidal)	14.00	220	0.400	5000	2000	308.0	1.7
	14.20	220	0.405	4930	1995	316.0	1.8
	14.50	220	0.415	4830	2005	331.0	1.8
	14.80	220	0.425	4730	2010	346.0	1.8
	15.00	220	0.430	4670	2010	355.0	1.8
	15.20	220	0.435	4605	2005	364.0	1.8
	15.50	220	0.445	4520	2010	379.5	1.7
	15.80	220	0.450	4430	1995	391.0	1.8
	16.00	220	0.455	4375	1990	400.0	1.8
	16.00	220	0.455	4375	1990	400.0	1.8
Wrought aluminium alloys Si < 6%	14.00	250	0.310	5685	1760	271.0	1.9
	14.20	250	0.315	5605	1765	279.5	2.0
	14.50	250	0.320	5490	1755	290.0	2.0
	14.80	250	0.330	5375	1775	305.5	2.0
	15.00	250	0.335	5305	1775	313.5	2.0
	15.20	250	0.340	5235	1780	323.0	2.0
	15.50	250	0.345	5135	1770	334.0	2.0
	15.80	250	0.350	5035	1760	345.0	2.0
	16.00	250	0.355	4975	1765	355.0	2.0
	16.00	250	0.355	4975	1765	355.0	2.0


Spiral flute drills Supradrill® U

5xd



Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500				Inox Stainless		GG(G) Aluminium
-------------	----------------	-----------------	-----------------	--	--	--	-------------------	--	--------------------



Example: Order-N°.							NANO-U ²	
Article-N°.							B62015	
ø-Code							B63015	
ø Code	d1 m7	d2 h6	l1	l2	l4	L _{max}		
.1390	13.90	14	124	77	45	55.3		●
.1400	14.00	14	124	77	45	55.3		●
.1410	14.10	16	133	83	48	59.3		●
.1420	14.20	16	133	83	48	59.2		●
.1430	14.30	16	133	83	48	59.2		●
.1440	14.40	16	133	83	48	59.1		●
.1450	14.50	16	133	83	48	59.1		●
.1460	14.60	16	133	83	48	58.9		●
.1470	14.70	16	133	83	48	58.9		●
.1480	14.80	16	133	83	48	58.8		●
.1490	14.90	16	133	83	48	58.8		●
.1500	15.00	16	133	83	48	58.7		●
.1510	15.10	16	133	83	48	58.7		●
.1520	15.20	16	133	83	48	58.6		●
.1530	15.30	16	133	83	48	58.5		●
.1540	15.40	16	133	83	48	58.4		●
.1550	15.50	16	133	83	48	58.4		●
.1560	15.60	16	133	83	48	58.3		●
.1570	15.70	16	133	83	48	58.3		●
.1580	15.80	16	133	83	48	58.3		●
.1590	15.90	16	133	83	48	58.3		●
.1600	16.00	16	133	83	48	58.3		●

Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
	Steel < 500 N/mm ²	16.20	170	0.425	3340	1420	292.5	2.8
		16.50	170	0.435	3280	1425	304.5	2.8
		16.60	170	0.435	3260	1420	307.5	2.8
		16.80	170	0.440	3220	1415	313.5	2.8
		17.00	170	0.445	3185	1415	321.0	2.8
		17.20	170	0.455	3145	1430	332.5	2.7
		17.50	170	0.460	3090	1420	341.5	2.8
		17.80	170	0.470	3040	1430	356.0	2.7
		18.00	170	0.475	3005	1425	362.5	2.7
	Steel 500 - 850 N/mm ²	16.20	130	0.425	2555	1085	223.5	3.7
		16.50	130	0.435	2510	1090	233.0	3.6
		16.60	130	0.435	2495	1085	235.0	3.6
		16.80	130	0.440	2465	1085	240.5	3.6
		17.00	130	0.445	2435	1085	246.5	3.6
		17.20	130	0.455	2405	1095	254.5	3.6
		17.50	130	0.460	2365	1090	262.0	3.6
		17.80	130	0.470	2325	1095	272.5	3.6
		18.00	130	0.475	2300	1095	278.5	3.6
	Steel 850 - 1100 N/mm ²	16.20	110	0.325	2160	700	144.5	5.7
		16.50	110	0.330	2120	700	149.5	5.7
		16.60	110	0.330	2110	695	150.5	5.7
		16.80	110	0.335	2085	700	155.0	5.6
		17.00	110	0.340	2060	700	159.0	5.6
		17.20	110	0.345	2035	700	162.5	5.6
		17.50	110	0.350	2000	700	168.5	5.6
		17.80	110	0.355	1965	700	174.0	5.6
		18.00	110	0.360	1945	700	178.0	5.6
	Steel 1100 - 1300 N/mm ²	16.20	70	0.270	1375	370	76.5	10.7
		16.50	70	0.275	1350	370	79.0	10.7
		16.60	70	0.275	1340	370	80.0	10.7
		16.80	70	0.280	1325	370	82.0	10.7
		17.00	70	0.285	1310	375	85.0	10.5
		17.20	70	0.285	1295	370	86.0	10.6
		17.50	70	0.290	1275	370	89.0	10.6
		17.80	70	0.295	1250	370	92.0	10.6
		18.00	70	0.300	1240	370	94.0	10.6

Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
Steel 1300 - 1500 N/mm ²	16.20	40	0.215	785	170	35.0	23.4
	16.50	40	0.220	770	170	36.5	23.3
	16.60	40	0.220	765	170	37.0	23.3
	16.80	40	0.225	760	170	37.5	23.2
	17.00	40	0.225	750	170	38.5	23.2
	17.20	40	0.230	740	170	39.5	23.1
	17.50	40	0.235	730	170	41.0	23.1
	17.80	40	0.235	715	170	42.5	23.0
	18.00	40	0.240	705	170	43.5	23.0
Cold work tool steel (12% Cr) high alloyed [1.2379] Stainless steel [Cr-Ni/1.4301]	16.20	60	0.250	1180	295	61.0	13.5
	16.50	60	0.255	1155	295	63.0	13.4
	16.60	60	0.255	1150	295	64.0	13.4
	16.80	60	0.260	1135	295	65.5	13.4
	17.00	60	0.260	1125	295	67.0	13.4
	17.20	60	0.265	1110	295	68.5	13.3
	17.50	60	0.270	1090	295	71.0	13.3
	17.80	60	0.275	1075	295	73.5	13.3
	18.00	60	0.275	1060	290	74.0	13.5
Cast iron (lamellar / spheroidal)	16.20	220	0.465	4325	2010	414.5	2.0
	16.50	220	0.470	4245	1995	426.5	2.0
	16.60	220	0.475	4220	2005	434.0	2.0
	16.80	220	0.480	4170	2000	443.5	2.0
	17.00	220	0.485	4120	2000	454.0	2.0
	17.20	220	0.490	4070	1995	463.5	2.0
	17.50	220	0.500	4000	2000	481.0	2.0
	17.80	220	0.510	3935	2005	499.0	2.0
	18.00	220	0.515	3890	2005	510.0	2.0
Wrought aluminium alloys Si < 6%	16.20	250	0.360	4910	1770	365.0	2.2
	16.50	250	0.365	4825	1760	376.5	2.2
	16.60	250	0.370	4795	1775	384.0	2.2
	16.80	250	0.375	4735	1775	393.5	2.2
	17.00	250	0.380	4680	1780	404.0	2.2
	17.20	250	0.380	4625	1760	409.0	2.2
	17.50	250	0.390	4545	1775	427.0	2.2
	17.80	250	0.395	4470	1765	439.0	2.2
	18.00	250	0.400	4420	1770	450.5	2.2

Spiral flute drills Supradrill® U

5xd






Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500				Inox Stainless		GG(G) Aluminium
-------------	----------------	-----------------	-----------------	--	--	--	-------------------	--	--------------------

Example: Order-N°.							Article-N°.		ø-Code				NANO-U ²	
							B62015		.1610				B62015	
													B63015	
ø Code	d1 m7	d2 h6	l1	l2	l4	L _{max}								
.1610	16.10	18	143	93	48	66.3							●	
.1620	16.20	18	143	93	48	66.2							●	
.1630	16.30	18	143	93	48	66.2							●	
.1640	16.40	18	143	93	48	66.1							●	
.1650	16.50	18	143	93	48	66.0							●	
.1660	16.60	18	143	93	48	65.9							●	
.1670	16.70	18	143	93	48	65.9							●	
.1680	16.80	18	143	93	48	65.8							●	
.1690	16.90	18	143	93	48	65.8							●	
.1700	17.00	18	143	93	48	65.7							●	
.1710	17.10	18	143	93	48	65.7							●	
.1720	17.20	18	143	93	48	65.5							●	
.1730	17.30	18	143	93	48	65.5							●	
.1740	17.40	18	143	93	48	65.4							●	
.1750	17.50	18	143	93	48	65.4							●	
.1760	17.60	18	143	93	48	65.3							●	
.1770	17.70	18	143	93	48	65.3							●	
.1780	17.80	18	143	93	48	65.2							●	
.1790	17.90	18	143	93	48	65.3							●	
.1800	18.00	18	143	93	48	65.3							●	

Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
	Steel < 500 N/mm ²	18.50	170	0.485	2925	1420	381.5	3.0
		18.70	170	0.490	2895	1420	390.0	3.0
		19.00	170	0.500	2850	1425	404.0	3.0
		19.20	170	0.505	2820	1425	412.5	3.0
		19.30	170	0.510	2805	1430	418.5	3.0
		19.50	170	0.515	2775	1430	427.0	3.0
		19.70	170	0.520	2745	1425	434.5	3.0
		19.80	170	0.520	2735	1420	437.0	3.0
		20.00	170	0.525	2705	1420	446.0	3.0
	Steel 500 - 850 N/mm ²	18.50	130	0.485	2235	1085	291.5	3.9
		18.70	130	0.490	2215	1085	298.0	3.9
		19.00	130	0.500	2180	1090	309.0	3.9
		19.20	130	0.505	2155	1090	315.5	3.9
		19.30	130	0.510	2145	1095	320.5	3.9
		19.50	130	0.515	2120	1090	325.5	3.9
		19.70	130	0.520	2100	1090	332.0	3.9
		19.80	130	0.520	2090	1085	334.0	3.9
		20.00	130	0.525	2070	1085	341.0	3.9
	Steel 850 - 1100 N/mm ²	18.50	110	0.370	1895	700	188.0	6.1
		18.70	110	0.375	1870	700	192.5	6.1
		19.00	110	0.380	1845	700	198.5	6.1
		19.20	110	0.385	1825	705	204.0	6.0
		19.30	110	0.385	1815	700	205.0	6.0
		19.50	110	0.390	1795	700	209.0	6.0
		19.70	110	0.395	1775	700	213.5	6.0
		19.80	110	0.395	1770	700	215.5	6.0
		20.00	110	0.400	1750	700	220.0	6.0
	Steel 1100 - 1300 N/mm ²	18.50	70	0.310	1205	375	101.0	11.4
		18.70	70	0.310	1190	370	101.5	11.5
		19.00	70	0.315	1175	370	105.0	11.5
		19.20	70	0.320	1160	370	107.0	11.4
		19.30	70	0.320	1155	370	108.0	11.4
		19.50	70	0.325	1145	370	110.5	11.4
		19.70	70	0.330	1130	375	114.5	11.2
		19.80	70	0.330	1125	370	114.0	11.4
		20.00	70	0.335	1115	375	118.0	11.2

Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
Steel 1300 - 1500 N/mm ²	18.50	40	0.245	690	170	45.5	25.0
	18.70	40	0.250	680	170	46.5	25.0
	19.00	40	0.255	670	170	48.0	25.0
	19.20	40	0.255	665	170	49.0	24.9
	19.30	40	0.255	660	170	49.5	24.9
	19.50	40	0.260	655	170	51.0	24.8
	19.70	40	0.265	645	170	52.0	24.8
	19.80	40	0.265	645	170	52.5	24.8
	20.00	40	0.265	635	170	53.5	24.8
Cold work tool steel (12% Cr) high alloyed [1.2379] Stainless steel [Cr-Ni/1.4301]	18.50	60	0.285	1030	295	79.5	14.4
	18.70	60	0.290	1020	295	81.0	14.4
	19.00	60	0.290	1005	290	82.0	14.6
	19.20	60	0.295	995	295	85.5	14.3
	19.30	60	0.295	990	290	85.0	14.6
	19.50	60	0.300	980	295	88.0	14.3
	19.70	60	0.305	970	295	90.0	14.3
	19.80	60	0.305	965	295	91.0	14.3
	20.00	60	0.310	955	295	92.5	14.3
Cast iron (lamellar / spheroidal)	18.50	220	0.530	3785	2005	539.0	2.1
	18.70	220	0.535	3745	2005	550.5	2.1
	19.00	220	0.545	3685	2010	570.0	2.1
	19.20	220	0.550	3645	2005	580.5	2.1
	19.30	220	0.550	3630	1995	583.5	2.1
	19.50	220	0.555	3590	1990	594.5	2.1
	19.70	220	0.565	3555	2010	612.5	2.1
	19.80	220	0.565	3535	1995	614.5	2.1
	20.00	220	0.570	3500	1995	626.5	2.1
Wrought aluminium alloys Si < 6%	18.50	250	0.410	4300	1765	474.5	2.4
	18.70	250	0.415	4255	1765	484.5	2.4
	19.00	250	0.420	4190	1760	499.0	2.4
	19.20	250	0.425	4145	1760	509.5	2.4
	19.30	250	0.430	4125	1775	519.5	2.4
	19.50	250	0.435	4080	1775	530.0	2.4
	19.70	250	0.440	4040	1780	542.5	2.4
	19.80	250	0.440	4020	1770	545.0	2.4
	20.00	250	0.445	3980	1770	556.0	2.4


5xd



Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500				Inox Stainless		GG(G) Aluminium
--------------------	-----------------------	------------------------	------------------------	--	--	--	--------------------------	--	---------------------------

[illegible]

Application



Material

Steel
< 500 N/mm²

Steel
500 - 850 N/mm²

Steel
850 - 1100 N/mm²

Steel
1100 - 1300 N/mm²

Material

Steel
1300 - 1500 N/mm²

Cold work tool steel
(12% Cr)
high alloyed
[1.2379]

Cast iron
(lamellar / spheroidal)

Wrought aluminium
alloys Si < 6%

d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
2.50	140	0.060	17825	1070	5.5	1.2
2.70	140	0.065	16505	1075	6.0	1.1
2.90	140	0.070	15365	1075	7.0	1.1
3.00	140	0.070	14855	1040	7.5	1.2
3.30	140	0.080	13505	1080	9.0	1.1
3.50	140	0.085	12730	1080	10.5	1.1
3.80	140	0.090	11725	1055	12.0	1.6
4.00	140	0.095	11140	1060	13.5	1.5
4.20	140	0.100	10610	1060	14.5	1.5

2.50	110	0.060	14005	840	4.0	1.5
2.70	110	0.065	12970	845	5.0	1.5
2.90	110	0.070	12075	845	5.5	1.4
3.00	110	0.070	11670	815	6.0	1.5
3.30	110	0.080	10610	850	7.5	1.4
3.50	110	0.085	10005	850	8.0	1.4
3.80	110	0.090	9215	830	9.5	2.0
4.00	110	0.095	8755	830	10.5	1.9
4.20	110	0.100	8335	835	11.5	1.9

2.50	80	0.045	10185	460	2.5	2.7
2.70	80	0.050	9430	470	2.5	2.6
2.90	80	0.050	8780	440	3.0	2.8
3.00	80	0.055	8490	465	3.5	2.6
3.30	80	0.060	7715	465	4.0	2.6
3.50	80	0.065	7275	475	4.5	2.5
3.80	80	0.070	6700	470	5.5	3.5
4.00	80	0.070	6365	445	5.5	3.6
4.20	80	0.075	6065	455	6.5	3.5

2.50	55	0.040	7005	280	1.5	4.4
2.70	55	0.040	6485	260	1.5	4.7
2.90	55	0.045	6035	270	2.0	4.5
3.00	55	0.045	5835	265	2.0	4.6
3.30	55	0.050	5305	265	2.5	4.5
3.50	55	0.055	5000	275	2.5	4.3
3.80	55	0.055	4605	255	3.0	6.4
4.00	55	0.060	4375	265	3.5	6.1
4.20	55	0.065	4170	270	3.5	6.0

d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
2.50	25	0.025	3185	80	0.5	15.6
2.70	25	0.025	2945	75	0.5	16.4
2.90	25	0.030	2745	80	0.5	15.3
3.00	25	0.030	2655	80	0.5	15.2
3.30	25	0.035	2410	85	0.5	14.1
3.50	25	0.035	2275	80	1.0	14.8
3.80	25	0.040	2095	85	1.0	19.3
4.00	25	0.040	1990	80	1.0	20.2
4.20	25	0.040	1895	75	1.0	21.4


2.50	50	0.030	6365	190	1.0	6.6
2.70	50	0.035	5895	205	1.0	6.0
2.90	50	0.035	5490	190	1.5	6.4
3.00	50	0.040	5305	210	1.5	5.8
3.30	50	0.040	4825	195	1.5	6.1
3.50	50	0.045	4545	205	2.0	5.8
3.80	50	0.050	4190	210	2.5	7.8
4.00	50	0.050	3980	200	2.5	8.1
4.20	50	0.055	3790	210	3.0	7.7

2.50	160	0.065	20370	1325	6.5	0.9
2.70	160	0.070	18865	1320	7.5	0.9
2.90	160	0.075	17560	1315	8.5	0.9
3.00	160	0.075	16975	1275	9.0	1.0
3.30	160	0.085	15435	1310	11.0	0.9
3.50	160	0.090	14550	1310	12.5	0.9
3.80	160	0.100	13405	1340	15.0	1.2
4.00	160	0.105	12730	1335	17.0	1.2
4.20	160	0.110	12125	1335	18.5	1.2

2.50	220	0.050	28010	1400	7.0	0.9
2.70	220	0.055	25935	1425	8.0	0.9
2.90	220	0.060	24150	1450	9.5	0.8
3.00	220	0.060	23345	1400	10.0	0.9
3.30	220	0.065	21220	1380	12.0	0.9
3.50	220	0.070	20010	1400	13.5	0.8
3.80	220	0.075	18430	1380	15.5	1.2
4.00	220	0.080	17505	1400	17.5	1.2
4.20	220	0.085	16675	1415	19.5	1.1

Spiral flute drills Supradrill® U

5xd



Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500							GG(G) Aluminium
-------------	----------------	-----------------	-----------------	--	--	--	--	--	--	--------------------

Example: Order-N°.							NANO-U ²	
Article-N°.							B62014	
ø-Code							B63014	
ø Code	d1 m7	d2 h6	l1	l2	l4	L _{max}		
.0250	2.50	6	66	28	36	20.8		●
.0255	2.55	6	66	28	36	20.7		●
.0260	2.60	6	66	28	36	20.6		●
.0265	2.65	6	66	28	36	20.6		●
.0270	2.70	6	66	28	36	20.6		●
.0280	2.80	6	66	28	36	20.4		●
.0285	2.85	6	66	28	36	20.4		●
.0290	2.90	6	66	28	36	20.4		●
.0295	2.95	6	66	28	36	20.3		●
.0300	3.00	6	66	28	36	20.2		●
.0310	3.10	6	66	28	36	20.2		●
.0320	3.20	6	66	28	36	20.0		●
.0330	3.30	6	66	28	36	20.0		●
.0340	3.40	6	66	28	36	19.8		●
.0350	3.50	6	66	28	36	19.8		●
.0360	3.60	6	66	28	36	19.6		●
.0370	3.70	6	66	28	36	19.6		●
.0380	3.80	6	74	36	36	27.4		●
.0390	3.90	6	74	36	36	27.4		●
.0400	4.00	6	74	36	36	26.9		●
.0410	4.10	6	74	36	36	26.9		●
.0420	4.20	6	74	36	36	26.8		●
.0430	4.30	6	74	36	36	26.8		●



Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
Steel < 500 N/mm ²		4.50	140	0.105	9905	1040	16.5	1.5
		4.80	140	0.115	9285	1070	19.5	1.9
		5.00	140	0.120	8915	1070	21.0	2.0
		5.10	140	0.120	8740	1050	21.5	2.0
		5.50	140	0.130	8100	1055	25.0	2.0
		5.80	140	0.135	7685	1035	27.5	2.0
		6.00	140	0.140	7425	1040	29.5	2.0
		6.10	140	0.145	7305	1060	31.0	2.3
		6.50	140	0.155	6855	1065	35.5	2.3
		4.50	110	0.105	7780	815	13.0	2.0
		4.80	110	0.115	7295	840	15.0	2.5
		5.00	110	0.120	7005	840	16.5	2.5
		5.10	110	0.120	6865	825	17.0	2.5
		5.50	110	0.130	6365	825	19.5	2.5
		5.80	110	0.135	6035	815	21.5	2.5
		6.00	110	0.140	5835	815	23.0	2.5
		6.10	110	0.145	5740	830	24.5	3.0
		6.50	110	0.155	5385	835	27.5	2.9
Steel 850 - 1100 N/mm ²		4.50	80	0.080	5660	455	7.0	3.5
		4.80	80	0.085	5305	450	8.0	4.6
		5.00	80	0.090	5095	460	9.0	4.5
		5.10	80	0.090	4995	450	9.0	4.6
		5.50	80	0.100	4630	465	11.0	4.4
		5.80	80	0.105	4390	460	12.0	4.5
		6.00	80	0.110	4245	465	13.0	4.5
		6.10	80	0.110	4175	460	13.5	5.4
		6.50	80	0.115	3920	450	15.0	5.5
		4.50	55	0.070	3890	270	4.5	5.9
		4.80	55	0.070	3645	255	4.5	8.1
		5.00	55	0.075	3500	265	5.0	7.9
		5.10	55	0.075	3435	260	5.5	8.0
		5.50	55	0.085	3185	270	6.5	7.7
		5.80	55	0.085	3020	255	6.5	8.1
		6.00	55	0.090	2920	265	7.5	7.8
		6.10	55	0.090	2870	260	7.5	9.5
		6.50	55	0.100	2695	270	9.0	9.1

Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
Steel 1300 - 1500 N/mm²	4.50	25	0.045	1770	80	1.5	19.9
	4.80	25	0.050	1660	85	1.5	24.3
	5.00	25	0.050	1590	80	1.5	26.1
	5.10	25	0.050	1560	80	1.5	26.0
	5.50	25	0.055	1445	80	2.0	25.8
	5.80	25	0.060	1370	80	2.0	25.8
	6.00	25	0.060	1325	80	2.5	25.9
	6.10	25	0.060	1305	80	2.5	31.0
6.50	25	0.065	1225	80	2.5	30.8	
Cold work tool steel (12% Cr) high alloyed [1.2379]	4.50	50	0.060	3535	210	3.5	7.6
	4.80	50	0.060	3315	200	3.5	10.3
	5.00	50	0.065	3185	205	4.0	10.2
	5.10	50	0.065	3120	205	4.0	10.1
	5.50	50	0.070	2895	205	5.0	10.1
	5.80	50	0.075	2745	205	5.5	10.1
	6.00	50	0.075	2655	200	5.5	10.3
	6.10	50	0.080	2610	210	6.0	11.8
6.50	50	0.085	2450	210	7.0	11.7	
Cast iron (lamellar / spheroidal)	4.50	160	0.115	11320	1300	20.5	1.2
	4.80	160	0.125	10610	1325	24.0	1.6
	5.00	160	0.130	10185	1325	26.0	1.6
	5.10	160	0.130	9985	1300	26.5	1.6
	5.50	160	0.140	9260	1295	31.0	1.6
	5.80	160	0.150	8780	1315	34.5	1.6
	6.00	160	0.155	8490	1315	37.0	1.6
	6.10	160	0.155	8350	1295	38.0	1.9
6.50	160	0.165	7835	1295	43.0	1.9	
Wrought aluminium alloys Si < 6%	4.50	220	0.090	15560	1400	22.5	1.1
	4.80	220	0.095	14590	1385	25.0	1.5
	5.00	220	0.100	14005	1400	27.5	1.5
	5.10	220	0.100	13730	1375	28.0	1.5
	5.50	220	0.110	12730	1400	33.5	1.5
	5.80	220	0.115	12075	1390	36.5	1.5
	6.00	220	0.120	11670	1400	39.5	1.5
	6.10	220	0.120	11480	1380	40.5	1.8
6.50	220	0.130	10775	1400	46.5	1.8	

Spiral flute drills Supradrill® U


5xd

HM
MG10



Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500							GG(G) Aluminium
-------------	----------------	-----------------	-----------------	--	--	--	--	--	--	--------------------



Example: Order-N°.							Article-N°.		ø-Code				NANO-U ²	
							B62014		.0440				B62014	
													B63014	
ø Code	d1 m7	d2 h6	l1	l2	l4	L _{max}								
.0440	4.40	6	74	36	36	26.6							●	
.0450	4.50	6	74	36	36	26.6							●	
.0460	4.60	6	74	36	36	26.5							●	
.0470	4.70	6	74	36	36	26.5							●	
.0480	4.80	6	82	44	36	34.4							●	
.0490	4.90	6	82	44	36	34.4							●	
.0500	5.00	6	82	44	36	34.8							●	
.0510	5.10	6	82	44	36	34.7							●	
.0520	5.20	6	82	44	36	34.6							●	
.0530	5.30	6	82	44	36	34.6							●	
.0540	5.40	6	82	44	36	34.5							●	
.0550	5.50	6	82	44	36	34.5							●	
.0560	5.60	6	82	44	36	34.4							●	
.0570	5.70	6	82	44	36	34.4							●	
.0580	5.80	6	82	44	36	34.4							●	
.0590	5.90	6	82	44	36	34.5							●	
.0600	6.00	6	82	44	36	34.5							●	
.0610	6.10	8	91	53	36	41.4							●	
.0620	6.20	8	91	53	36	41.2							●	
.0630	6.30	8	91	53	36	41.2							●	
.0640	6.40	8	91	53	36	41.1							●	
.0650	6.50	8	91	53	36	41.1							●	
.0660	6.60	8	91	53	36	41.0							●	

Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
	Steel < 500 N/mm ²	6.80	140	0.160	6555	1050	38.0	2.3
		6.90	140	0.165	6460	1065	40.0	2.3
		7.00	140	0.165	6365	1050	40.5	2.3
		7.50	140	0.180	5940	1070	47.5	2.3
		7.80	140	0.185	5715	1055	50.5	2.3
		8.00	140	0.190	5570	1060	53.5	2.3
		8.20	140	0.195	5435	1060	56.0	2.6
		8.50	140	0.200	5245	1050	59.5	2.6
		8.60	140	0.205	5180	1060	61.5	2.6
	Steel 500 - 850 N/mm ²	6.80	110	0.160	5150	825	30.0	3.0
		6.90	110	0.165	5075	835	31.0	2.9
		7.00	110	0.165	5000	825	31.5	3.0
		7.50	110	0.180	4670	840	37.0	2.9
		7.80	110	0.185	4490	830	39.5	2.9
		8.00	110	0.190	4375	830	41.5	2.9
		8.20	110	0.195	4270	835	44.0	3.3
		8.50	110	0.200	4120	825	47.0	3.3
		8.60	110	0.205	4070	835	48.5	3.3
	Steel 850 - 1100 N/mm ²	6.80	80	0.120	3745	450	16.5	5.5
		6.90	80	0.125	3690	460	17.0	5.3
		7.00	80	0.125	3640	455	17.5	5.4
		7.50	80	0.135	3395	460	20.5	5.3
		7.80	80	0.140	3265	455	21.5	5.3
		8.00	80	0.145	3185	460	23.0	5.3
		8.20	80	0.150	3105	465	24.5	6.0
		8.50	80	0.155	2995	465	26.5	5.9
		8.60	80	0.155	2960	460	26.5	6.0
	Steel 1100 - 1300 N/mm ²	6.80	55	0.100	2575	260	9.5	9.4
		6.90	55	0.105	2535	265	10.0	9.2
		7.00	55	0.105	2500	265	10.0	9.2
		7.50	55	0.115	2335	270	12.0	9.0
		7.80	55	0.115	2245	260	12.5	9.3
		8.00	55	0.120	2190	265	13.5	9.1
		8.20	55	0.125	2135	265	14.0	10.5
		8.50	55	0.130	2060	270	15.5	10.2
		8.60	55	0.130	2035	265	15.5	10.4

Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
Steel 1300 - 1500 N/mm ²	6.80	25	0.070	1170	80	3.0	30.7
	6.90	25	0.070	1155	80	3.0	30.6
	7.00	25	0.070	1135	80	3.0	30.5
	7.50	25	0.075	1060	80	3.5	30.3
	7.80	25	0.080	1020	80	4.0	30.3
	8.00	25	0.080	995	80	4.0	30.3
	8.20	25	0.080	970	80	4.0	34.6
	8.50	25	0.085	935	80	4.5	34.5
	8.60	25	0.085	925	80	4.5	34.5
Cold work tool steel (12% Cr) high alloyed [1.2379]	6.80	50	0.085	2340	200	7.5	12.3
	6.90	50	0.090	2305	205	7.5	12.0
	7.00	50	0.090	2275	205	8.0	11.9
	7.50	50	0.095	2120	200	9.0	12.1
	7.80	50	0.100	2040	205	10.0	11.8
	8.00	50	0.105	1990	210	10.5	11.5
	8.20	50	0.105	1940	205	11.0	13.5
	8.50	50	0.110	1870	205	11.5	13.5
	8.60	50	0.110	1850	205	12.0	13.5
Cast iron (lamellar / spheroidal)	6.80	160	0.175	7490	1310	47.5	1.9
	6.90	160	0.175	7380	1290	48.0	1.9
	7.00	160	0.180	7275	1310	50.5	1.9
	7.50	160	0.195	6790	1325	58.5	1.8
	7.80	160	0.200	6530	1305	62.5	1.9
	8.00	160	0.205	6365	1305	65.5	1.9
	8.20	160	0.210	6210	1305	69.0	2.1
	8.50	160	0.220	5990	1320	75.0	2.1
	8.60	160	0.220	5920	1300	75.5	2.1
Wrought aluminium alloys Si < 6%	6.80	220	0.135	10300	1390	50.5	1.8
	6.90	220	0.140	10150	1420	53.0	1.7
	7.00	220	0.140	10005	1400	54.0	1.7
	7.50	220	0.150	9335	1400	62.0	1.7
	7.80	220	0.155	8980	1390	66.5	1.7
	8.00	220	0.160	8755	1400	70.5	1.7
	8.20	220	0.165	8540	1410	74.5	2.0
	8.50	220	0.170	8240	1400	79.5	2.0
	8.60	220	0.170	8145	1385	80.5	2.0

Spiral flute drills Supradrill® U

5xd





Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500							GG(G) Aluminium
-------------	----------------	-----------------	-----------------	--	--	--	--	--	--	--------------------

Example: Order-N°.							Article-N°.		ø-Code				NANO-U ²	
							B62014		.0670				B62014	
													B63014	
ø Code	d1 m7	d2 h6	l1	l2	l4	L _{max}								
.0670	6.70	8	91	53	36	41.0							●	
.0680	6.80	8	91	53	36	40.9							●	
.0690	6.90	8	91	53	36	40.9							●	
.0700	7.00	8	91	53	36	40.7							●	
.0710	7.10	8	91	53	36	40.7							●	
.0720	7.20	8	91	53	36	40.6							●	
.0730	7.30	8	91	53	36	40.6							●	
.0740	7.40	8	91	53	36	40.5							●	
.0750	7.50	8	91	53	36	40.5							●	
.0760	7.60	8	91	53	36	40.4							●	
.0770	7.70	8	91	53	36	40.4							●	
.0780	7.80	8	91	53	36	40.4							●	
.0790	7.90	8	91	53	36	40.4							●	
.0800	8.00	8	91	53	36	40.4							●	
.0810	8.10	10	103	61	40	46.3							●	
.0820	8.20	10	103	61	40	46.2							●	
.0830	8.30	10	103	61	40	46.2							●	
.0840	8.40	10	103	61	40	46.1							●	
.0850	8.50	10	103	61	40	46.1							●	
.0860	8.60	10	103	61	40	46.0							●	
.0870	8.70	10	103	61	40	46.0							●	
.0880	8.80	10	103	61	40	45.9							●	
.0890	8.90	10	103	61	40	45.8							●	

Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
	Steel < 500 N/mm ²	9.00	140	0.215	4950	1065	68.0	2.6
		9.50	140	0.225	4690	1055	75.0	2.6
		9.80	140	0.230	4545	1045	79.0	2.6
		10.00	140	0.235	4455	1045	82.0	2.6
		10.20	140	0.240	4370	1050	86.0	3.0
		10.40	140	0.245	4285	1050	89.0	3.0
		10.50	140	0.250	4245	1060	92.0	3.0
		10.80	140	0.255	4125	1050	96.0	3.0
		11.00	140	0.260	4050	1055	100.5	3.0
	Steel 500 - 850 N/mm ²	9.00	110	0.215	3890	835	53.0	3.3
		9.50	110	0.225	3685	830	59.0	3.3
		9.80	110	0.230	3575	820	62.0	3.3
		10.00	110	0.235	3500	825	65.0	3.3
		10.20	110	0.240	3435	825	67.5	3.9
		10.40	110	0.245	3365	825	70.0	3.9
		10.50	110	0.250	3335	835	72.5	3.8
		10.80	110	0.255	3240	825	75.5	3.8
		11.00	110	0.260	3185	830	79.0	3.8
	Steel 850 - 1100 N/mm ²	9.00	80	0.160	2830	455	29.0	6.0
		9.50	80	0.170	2680	455	32.5	6.0
		9.80	80	0.175	2600	455	34.5	6.0
		10.00	80	0.180	2545	460	36.0	5.9
		10.20	80	0.185	2495	460	37.5	6.9
		10.40	80	0.185	2450	455	38.5	7.0
		10.50	80	0.190	2425	460	40.0	6.9
		10.80	80	0.195	2360	460	42.0	6.9
		11.00	80	0.200	2315	465	44.0	6.8
	Steel 1100 - 1300 N/mm ²	9.00	55	0.135	1945	265	17.0	10.3
		9.50	55	0.145	1845	270	19.0	10.1
		9.80	55	0.145	1785	260	19.5	10.5
		10.00	55	0.150	1750	265	21.0	10.3
		10.20	55	0.155	1715	265	21.5	12.0
		10.40	55	0.155	1685	260	22.0	12.3
		10.50	55	0.160	1665	265	23.0	12.0
		10.80	55	0.160	1620	260	24.0	12.2
		11.00	55	0.165	1590	260	24.5	12.2
Material		d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
Steel 1300 - 1500 N/mm ²		9.00	25	0.090	885	80	5.0	34.3
		9.50	25	0.095	840	80	5.5	34.1
		9.80	25	0.100	810	80	6.0	34.0
		10.00	25	0.100	795	80	6.5	34.0
		10.20	25	0.100	780	80	6.5	39.9
		10.40	25	0.105	765	80	7.0	39.8
		10.50	25	0.105	760	80	7.0	39.8
		10.80	25	0.110	735	80	7.5	39.6
		11.00	25	0.110	725	80	7.5	39.5
Cold work tool steel (12% Cr) high alloyed [1.2379]		9.00	50	0.115	1770	205	13.0	13.4
		9.50	50	0.120	1675	200	14.0	13.6
		9.80	50	0.125	1625	205	15.5	13.3
		10.00	50	0.130	1590	205	16.0	13.3
		10.20	50	0.130	1560	205	17.0	15.6
		10.40	50	0.135	1530	205	17.5	15.5
		10.50	50	0.135	1515	205	18.0	15.5
		10.80	50	0.140	1475	205	19.0	15.5
		11.00	50	0.140	1445	200	19.0	15.8
Cast iron (lamellar / spheroidal)		9.00	160	0.230	5660	1300	82.5	2.1
		9.50	160	0.245	5360	1315	93.0	2.1
		9.80	160	0.250	5195	1300	98.0	2.1
		10.00	160	0.255	5095	1300	102.0	2.1
		10.20	160	0.260	4995	1300	106.0	2.5
		10.40	160	0.265	4895	1295	110.0	2.5
		10.50	160	0.270	4850	1310	113.5	2.4
		10.80	160	0.280	4715	1320	121.0	2.4
		11.00	160	0.285	4630	1320	125.5	2.4
Wrought aluminium alloys Si < 6%		9.00	220	0.180	7780	1400	89.0	2.0
		9.50	220	0.190	7370	1400	99.0	1.9
		9.80	220	0.195	7145	1395	105.0	1.9
		10.00	220	0.200	7005	1400	110.0	1.9
		10.20	220	0.205	6865	1405	115.0	2.3
		10.40	220	0.210	6735	1415	120.0	2.3
		10.50	220	0.210	6670	1400	121.0	2.3
		10.80	220	0.215	6485	1395	128.0	2.3
		11.00	220	0.220	6365	1400	133.0	2.3

Spiral flute drills Supradrill® U

5xd





Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500							GG(G) Aluminium
-------------	----------------	-----------------	-----------------	--	--	--	--	--	--	--------------------

Example: Order-N°.							Article-N°.		ø-Code		NANO-U ²	
							B62014		.0900		B62014	
											B63014	
ø Code	d1 m7	d2 h6	l1	l2	l4	L _{max}						
.0900	9.00	10	103	61	40	45.7					●	
.0910	9.10	10	103	61	40	45.7					●	
.0920	9.20	10	103	61	40	45.6					●	
.0930	9.30	10	103	61	40	45.6					●	
.0940	9.40	10	103	61	40	45.5					●	
.0950	9.50	10	103	61	40	45.5					●	
.0960	9.60	10	103	61	40	45.4					●	
.0970	9.70	10	103	61	40	45.4					●	
.0980	9.80	10	103	61	40	45.3					●	
.0990	9.90	10	103	61	40	45.4					●	
.1000	10.00	10	103	61	40	45.4					●	
.1010	10.10	12	118	71	45	53.3					●	
.1020	10.20	12	118	71	45	53.2					●	
.1030	10.30	12	118	71	45	53.2					●	
.1040	10.40	12	118	71	45	53.1					●	
.1050	10.50	12	118	71	45	53.1					●	
.1060	10.60	12	118	71	45	53.0					●	
.1070	10.70	12	118	71	45	52.9					●	
.1080	10.80	12	118	71	45	52.8					●	
.1090	10.90	12	118	71	45	52.8					●	
.1100	11.00	12	118	71	45	52.7					●	
.1110	11.10	12	118	71	45	52.7					●	
.1120	11.20	12	118	71	45	52.6					●	

Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
	Steel < 500 N/mm ²	11.50	140	0.270	3875	1045	108.5	3.0
		11.70	140	0.275	3810	1050	113.0	3.0
		12.00	140	0.285	3715	1060	120.0	3.0
		12.50	140	0.295	3565	1050	129.0	3.2
		13.00	140	0.310	3430	1065	141.5	3.1
		14.00	140	0.330	3185	1050	161.5	3.2
		15.00	140	0.355	2970	1055	186.5	3.3
		15.50	140	0.365	2875	1050	198.0	3.3
		16.00	140	0.380	2785	1060	213.0	3.3
		11.50	110	0.270	3045	820	85.0	3.8
	Steel 500 - 850 N/mm ²	11.70	110	0.275	2995	825	88.5	3.8
		12.00	110	0.285	2920	830	94.0	3.8
		12.50	110	0.295	2800	825	101.0	4.1
		13.00	110	0.310	2695	835	111.0	4.0
		14.00	110	0.330	2500	825	127.0	4.0
		15.00	110	0.355	2335	830	146.5	4.2
		15.50	110	0.365	2260	825	155.5	4.2
		16.00	110	0.380	2190	830	167.0	4.2
		11.50	80	0.205	2215	455	47.5	6.9
		11.70	80	0.210	2175	455	49.0	6.9
	Steel 850 - 1100 N/mm ²	12.00	80	0.215	2120	455	51.5	6.9
		12.50	80	0.225	2035	460	56.5	7.3
		13.00	80	0.235	1960	460	61.0	7.3
		14.00	80	0.250	1820	455	70.0	7.3
		15.00	80	0.270	1700	460	81.5	7.7
		15.50	80	0.280	1645	460	87.0	7.6
		16.00	80	0.290	1590	460	92.5	7.6
		11.50	55	0.175	1520	265	27.5	11.9
		11.70	55	0.175	1495	260	28.0	12.1
		12.00	55	0.180	1460	265	30.0	11.8
	Steel 1100 - 1300 N/mm ²	12.50	55	0.190	1400	265	32.5	12.7
		13.00	55	0.195	1345	260	34.5	12.9
		14.00	55	0.210	1250	265	41.0	12.5
		15.00	55	0.225	1165	260	46.0	13.5
		15.50	55	0.235	1130	265	50.0	13.2
		16.00	55	0.240	1095	265	53.5	13.2
	Steel 1300 - 1500 N/mm ²	11.50	25	0.115	690	80	8.5	39.3
		11.70	25	0.115	680	80	8.5	39.3
		12.00	25	0.120	665	80	9.0	39.2
		12.50	25	0.125	635	80	10.0	42.0
		13.00	25	0.130	610	80	10.5	41.8
		14.00	25	0.140	570	80	12.5	41.5
		15.00	25	0.150	530	80	14.0	44.0
		15.50	25	0.155	515	80	15.0	43.8
		16.00	25	0.160	495	80	16.0	43.7
		11.50	50	0.150	1385	210	22.0	15.0
	Cold work tool steel (12% Cr) high alloyed [1.2379]	11.70	50	0.150	1360	205	22.0	15.3
		12.00	50	0.155	1325	205	23.0	15.3
		12.50	50	0.160	1275	205	25.0	16.4
		13.00	50	0.165	1225	200	26.5	16.7
		14.00	50	0.180	1135	205	31.5	16.2
		15.00	50	0.195	1060	205	36.0	17.2
		15.50	50	0.200	1025	205	38.5	17.1
		16.00	50	0.205	995	205	41.0	17.1
		11.50	160	0.295	4430	1305	135.5	2.4
		11.70	160	0.300	4355	1305	140.5	2.4
	Cast iron (lamellar / spheroidal)	12.00	160	0.310	4245	1315	148.5	2.4
		12.50	160	0.320	4075	1305	160.0	2.6
		13.00	160	0.335	3920	1315	174.5	2.5
		14.00	160	0.360	3640	1310	201.5	2.5
		15.00	160	0.385	3395	1305	230.5	2.7
		15.50	160	0.400	3285	1315	248.0	2.7
		16.00	160	0.410	3185	1305	262.5	2.7
		11.50	220	0.230	6090	1400	145.5	2.2
		11.70	220	0.235	5985	1405	151.0	2.2
		12.00	220	0.240	5835	1400	158.5	2.2
	Wrought aluminium alloys Si < 6%	12.50	220	0.250	5600	1400	172.0	2.4
		13.00	220	0.260	5385	1400	186.0	2.4
		14.00	220	0.280	5000	1400	215.5	2.4
		15.00	220	0.300	4670	1400	247.5	2.5
		15.50	220	0.310	4520	1400	264.0	2.5
		16.00	220	0.320	4375	1400	281.5	2.5

Spiral flute drills Supradrill® U


5xd

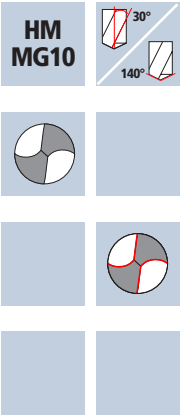

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500							GG(G) Aluminium
-------------	----------------	-----------------	-----------------	--	--	--	--	--	--	--------------------

Example: Order-N°.							NANO-U ²	
Article-N°.							B62014	
ø-Code							B63014	
ø Code	d1 m7	d2 h6	l1	l2	l4	L _{max}		
.1130	11.30	12	118	71	45	52.6		●
.1140	11.40	12	118	71	45	52.5		●
.1150	11.50	12	118	71	45	52.4		●
.1160	11.60	12	118	71	45	52.4		●
.1170	11.70	12	118	71	45	52.4		●
.1180	11.80	12	118	71	45	52.3		●
.1190	11.90	12	118	71	45	52.4		●
.1200	12.00	12	118	71	45	52.3		●
.1250	12.50	14	124	77	45	56.1		●
.1280	12.80	14	124	77	45	55.8		●
.1300	13.00	14	124	77	45	55.7		●
.1350	13.50	14	124	77	45	55.4		●
.1380	13.80	14	124	77	45	55.3		●
.1400	14.00	14	124	77	45	55.3		●
.1450	14.50	16	133	83	48	59.1		●
.1480	14.80	16	133	83	48	58.8		●
.1500	15.00	16	133	83	48	58.7		●
.1550	15.50	16	133	83	48	58.4		●
.1580	15.80	16	133	83	48	58.3		●
.1600	16.00	16	133	83	48	58.3		●

Application



Material

Steel
< 500 N/mm²

Steel
500 - 850 N/mm²

Steel
850 - 1100 N/mm²

Steel
1100 - 1300 N/mm²

Material

Steel
1300 - 1500 N/mm²

Cold work tool steel
(12% Cr)
high alloyed
[1.2379]
Stainless steel
[Cr-Ni/1.4301]

Titanium alloys
>300 HB
[Ti6Al4V]



Cast iron
(lamellar / spheroidal)

d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
3.00	180	0.140	19100	2675	19.0	0.4
3.30	180	0.155	17360	2690	23.0	0.4
3.50	180	0.165	16370	2700	26.0	0.4
3.80	180	0.175	15080	2640	30.0	0.4
4.00	180	0.195	14325	2795	35.0	0.4
4.20	180	0.210	13640	2865	39.5	0.4
4.50	180	0.240	12730	3055	48.5	0.4
4.80	180	0.255	11935	3045	55.0	0.4
5.00	180	0.265	11460	3035	59.5	0.4
3.00	160	0.120	16975	2035	14.5	0.5
3.30	160	0.130	15435	2005	17.0	0.5
3.50	160	0.140	14550	2035	19.5	0.5
3.80	160	0.150	13405	2010	23.0	0.6
4.00	160	0.165	12730	2100	26.5	0.5
4.20	160	0.180	12125	2185	30.5	0.5
4.50	160	0.205	11320	2320	37.0	0.5
4.80	160	0.220	10610	2335	42.5	0.5
5.00	160	0.230	10185	2345	46.0	0.5
3.00	140	0.110	14855	1635	11.5	0.6
3.30	140	0.120	13505	1620	14.0	0.6
3.50	140	0.130	12730	1655	16.0	0.6
3.80	140	0.140	11725	1640	18.5	0.7
4.00	140	0.155	11140	1725	21.5	0.7
4.20	140	0.165	10610	1750	24.0	0.6
4.50	140	0.190	9905	1880	30.0	0.6
4.80	140	0.200	9285	1855	33.5	0.6
5.00	140	0.210	8915	1870	36.5	0.6
3.00	100	0.085	10610	900	6.5	1.1
3.30	100	0.090	9645	870	7.5	1.1
3.50	100	0.100	9095	910	9.0	1.0
3.80	100	0.105	8375	880	10.0	1.3
4.00	100	0.115	7960	915	11.5	1.2
4.20	100	0.125	7580	950	13.0	1.2
4.50	100	0.145	7075	1025	16.5	1.1
4.80	100	0.155	6630	1030	18.5	1.1
5.00	100	0.160	6365	1020	20.0	1.1

d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
3.00	55	0.065	5835	380	2.5	2.6
3.30	55	0.070	5305	370	3.0	2.6
3.50	55	0.075	5000	375	3.5	2.5
3.80	55	0.080	4605	370	4.0	3.1
4.00	55	0.090	4375	395	5.0	2.9
4.20	55	0.095	4170	395	5.5	2.9
4.50	55	0.110	3890	430	7.0	2.6
4.80	55	0.120	3645	435	8.0	2.5
5.00	55	0.125	3500	440	8.5	2.6
3.00	70	0.065	7425	485	3.5	2.0
3.30	70	0.070	6750	475	4.0	2.0
3.50	70	0.075	6365	475	4.5	2.0
3.80	70	0.080	5865	470	5.5	2.5
4.00	70	0.090	5570	500	6.5	2.3
4.20	70	0.095	5305	505	7.0	2.2
4.50	70	0.110	4950	545	8.5	2.0
4.80	70	0.120	4640	555	10.0	2.0
5.00	70	0.125	4455	555	11.0	2.0
3.00	40	0.065	4245	275	2.0	3.5
3.30	40	0.070	3860	270	2.5	3.5
3.50	40	0.075	3640	275	2.5	3.4
3.80	40	0.080	3350	270	3.0	4.3
4.00	40	0.090	3185	285	3.5	4.0
4.20	40	0.095	3030	290	4.0	3.9
4.50	40	0.110	2830	310	5.0	3.6
4.80	40	0.120	2655	320	6.0	3.5
5.00	40	0.125	2545	320	6.5	3.5
3.00	240	0.125	25465	3185	22.5	0.3
3.30	240	0.140	23150	3240	27.5	0.3
3.50	240	0.150	21825	3275	31.5	0.3
3.80	240	0.160	20105	3215	36.5	0.4
4.00	240	0.175	19100	3345	42.0	0.3
4.20	240	0.190	18190	3455	48.0	0.3
4.50	240	0.220	16975	3735	59.5	0.3
4.80	240	0.235	15915	3740	67.5	0.3
5.00	240	0.240	15280	3665	72.0	0.3

Spiral flute drills XDrill®

3xd

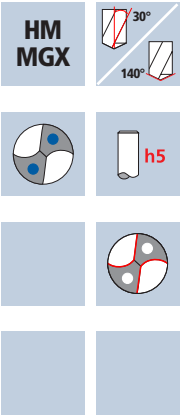

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	GG(G)
-------------	----------------	-----------------	-----------------	--------------	--	--	-------------------	----------------	-------



Example: Order-N°.							DURO-X	
Article-N°.							B72011	
ø-Code								
ø Code	d1 m7	d2 h5	l1	l2	l4	L _{max}		
.0300	3.0	6	62	20	36	16.2		●
.0310	3.1	6	62	20	36	16.2		●
.0320	3.2	6	62	20	36	16.0		●
.0330	3.3	6	62	20	36	16.0		●
.0340	3.4	6	62	20	36	15.8		●
.0350	3.5	6	62	20	36	15.8		●
.0360	3.6	6	62	20	36	15.6		●
.0370	3.7	6	62	20	36	15.6		●
.0380	3.8	6	66	24	36	19.4		●
.0390	3.9	6	66	24	36	19.4		●
.0400	4.0	6	66	24	36	18.9		●
.0410	4.1	6	66	24	36	18.9		●
.0420	4.2	6	66	24	36	18.8		●
.0430	4.3	6	66	24	36	18.7		●
.0440	4.4	6	66	24	36	18.6		●
.0450	4.5	6	66	24	36	18.6		●
.0460	4.6	6	66	24	36	18.5		●
.0470	4.7	6	66	24	36	18.5		●
.0480	4.8	6	66	28	36	18.4		●
.0490	4.9	6	66	28	36	18.4		●
.0500	5.0	6	66	28	36	18.7		●
.0510	5.1	6	66	28	36	18.7		●
.0520	5.2	6	66	28	36	18.6		●

Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
	Steel < 500 N/mm ²	5.50	180	0.295	10415	3070	73.0	0.4
		5.80	180	0.310	9880	3065	81.0	0.4
		6.00	180	0.330	9550	3150	89.0	0.4
		6.20	180	0.350	9240	3235	97.5	0.5
		6.50	180	0.370	8815	3260	108.0	0.5
		6.80	180	0.385	8425	3245	118.0	0.5
		7.00	180	0.395	8185	3235	124.5	0.5
		7.20	180	0.410	7960	3265	133.0	0.5
		7.50	180	0.425	7640	3245	143.5	0.5
	Steel 500 - 850 N/mm ²	5.50	160	0.250	9260	2315	55.0	0.5
		5.80	160	0.265	8780	2325	61.5	0.5
		6.00	160	0.285	8490	2420	68.5	0.5
		6.20	160	0.300	8215	2465	74.5	0.7
		6.50	160	0.315	7835	2470	82.0	0.7
		6.80	160	0.330	7490	2470	89.5	0.7
		7.00	160	0.340	7275	2475	95.0	0.7
		7.20	160	0.350	7075	2475	101.0	0.7
		7.50	160	0.365	6790	2480	109.5	0.7
	Steel 850 - 1100 N/mm ²	5.50	140	0.230	8100	1865	44.5	0.6
		5.80	140	0.245	7685	1885	50.0	0.6
		6.00	140	0.260	7425	1930	54.5	0.6
		6.20	140	0.275	7190	1975	59.5	0.9
		6.50	140	0.290	6855	1990	66.0	0.9
		6.80	140	0.305	6555	2000	72.5	0.9
		7.00	140	0.315	6365	2005	77.0	0.9
		7.20	140	0.320	6190	1980	80.5	0.9
		7.50	140	0.335	5940	1990	88.0	0.9
	Steel 1100 - 1300 N/mm ²	5.50	100	0.175	5785	1010	24.0	1.1
		5.80	100	0.185	5490	1015	27.0	1.1
		6.00	100	0.200	5305	1060	30.0	1.0
		6.20	100	0.210	5135	1080	32.5	1.6
		6.50	100	0.220	4895	1075	35.5	1.6
		6.80	100	0.230	4680	1075	39.0	1.6
		7.00	100	0.240	4545	1090	42.0	1.6
		7.20	100	0.245	4420	1085	44.0	1.6
		7.50	100	0.255	4245	1080	47.5	1.6

Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
Steel 1300 - 1500 N/mm ²	5.50	55	0.135	3185	430	10.0	2.6
	5.80	55	0.145	3020	440	11.5	2.5
	6.00	55	0.150	2920	440	12.5	2.5
	6.20	55	0.160	2825	450	13.5	3.9
	6.50	55	0.170	2695	460	15.5	3.8
	6.80	55	0.180	2575	465	17.0	3.7
	7.00	55	0.185	2500	465	18.0	3.7
	7.20	55	0.190	2430	460	18.5	3.7
	7.50	55	0.195	2335	455	20.0	3.8
Cold work tool steel (12% Cr) high alloyed [1.2379] Stainless steel [Cr-Ni/1.4301]	5.50	70	0.135	4050	545	13.0	2.0
	5.80	70	0.145	3840	555	14.5	2.0
	6.00	70	0.150	3715	555	15.5	2.0
	6.20	70	0.160	3595	575	17.5	3.0
	6.50	70	0.170	3430	585	19.5	3.0
	6.80	70	0.180	3275	590	21.5	2.9
	7.00	70	0.185	3185	590	22.5	2.9
	7.20	70	0.190	3095	590	24.0	2.9
	7.50	70	0.195	2970	580	25.5	2.9
Titanium alloys >300 HB [Ti6Al4V]	5.50	40	0.135	2315	315	7.5	3.5
	5.80	40	0.145	2195	320	8.5	3.5
	6.00	40	0.150	2120	320	9.0	3.5
	6.20	40	0.160	2055	330	10.0	5.3
	6.50	40	0.170	1960	335	11.0	5.2
	6.80	40	0.180	1870	335	12.0	5.2
	7.00	40	0.185	1820	335	13.0	5.1
	7.20	40	0.190	1770	335	13.5	5.1
	7.50	40	0.195	1700	330	14.5	5.2
Cast iron (lamellar / spheroidal)	5.50	240	0.265	13890	3680	87.5	0.3
	5.80	240	0.280	13170	3690	97.5	0.3
	6.00	240	0.300	12730	3820	108.0	0.3
	6.20	240	0.320	12320	3940	119.0	0.4
	6.50	240	0.335	11755	3940	130.5	0.4
	6.80	240	0.350	11235	3930	142.5	0.4
	7.00	240	0.360	10915	3930	151.0	0.4
	7.20	240	0.370	10610	3925	160.0	0.4
	7.50	240	0.385	10185	3920	173.0	0.4

Spiral flute drills XDrill®

3xd

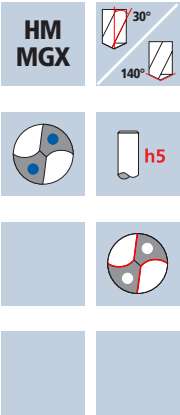

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	GG(G)
-------------	----------------	-----------------	-----------------	--------------	--	--	-------------------	----------------	-------



Example: Order-N°.							DURO-X	
Article-N°.							B72011	
ø-Code								
ø Code	d1 m7	d2 h5	l1	l2	l4	L _{max}		
.0530	5.3	6	66	28	36	18.6		●
.0540	5.4	6	66	28	36	18.5		●
.0550	5.5	6	66	28	36	18.5		●
.0560	5.6	6	66	28	36	18.4		●
.0570	5.7	6	66	28	36	18.4		●
.0580	5.8	6	66	28	36	18.4		●
.0590	5.9	6	66	28	36	18.4		●
.0600	6.0	6	66	28	36	18.5		●
.0610	6.1	8	79	34	36	29.3		●
.0620	6.2	8	79	34	36	29.2		●
.0630	6.3	8	79	34	36	29.2		●
.0640	6.4	8	79	34	36	29.1		●
.0650	6.5	8	79	34	36	29.1		●
.0660	6.6	8	79	34	36	29.0		●
.0670	6.7	8	79	34	36	29.0		●
.0680	6.8	8	79	34	36	28.8		●
.0690	6.9	8	79	34	36	28.8		●
.0700	7.0	8	79	34	36	28.7		●
.0710	7.1	8	79	41	36	28.7		●
.0720	7.2	8	79	41	36	28.6		●
.0730	7.3	8	79	41	36	28.6		●
.0740	7.4	8	79	41	36	28.5		●
.0750	7.5	8	79	41	36	28.5		●

Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
	Steel < 500 N/mm²	7.60	180	0.430	7540	3240	147.0	0.5
		8.00	180	0.455	7160	3260	164.0	0.5
		8.20	180	0.465	6985	3250	171.5	0.6
		8.50	180	0.480	6740	3235	183.5	0.6
		8.80	180	0.500	6510	3255	198.0	0.6
		9.00	180	0.510	6365	3245	206.5	0.6
		9.20	180	0.520	6230	3240	215.5	0.6
		9.50	180	0.540	6030	3255	230.5	0.6
		9.80	180	0.555	5845	3245	245.0	0.6
	Steel 500 - 850 N/mm²	7.60	160	0.370	6700	2480	112.5	0.7
		8.00	160	0.390	6365	2480	124.5	0.7
		8.20	160	0.400	6210	2485	131.0	0.8
		8.50	160	0.415	5990	2485	141.0	0.8
		8.80	160	0.425	5785	2460	149.5	0.8
		9.00	160	0.435	5660	2460	156.5	0.8
		9.20	160	0.445	5535	2465	164.0	0.8
		9.50	160	0.460	5360	2465	174.5	0.8
		9.80	160	0.475	5195	2470	186.5	0.8
	Steel 850 - 1100 N/mm²	7.60	140	0.340	5865	1995	90.5	0.9
		8.00	140	0.360	5570	2005	101.0	0.8
		8.20	140	0.365	5435	1985	105.0	1.0
		8.50	140	0.380	5245	1995	113.0	1.0
		8.80	140	0.395	5065	2000	121.5	1.0
		9.00	140	0.405	4950	2005	127.5	0.9
		9.20	140	0.410	4845	1985	132.0	1.0
		9.50	140	0.425	4690	1995	141.5	0.9
		9.80	140	0.440	4545	2000	151.0	0.9
	Steel 1100 - 1300 N/mm²	7.60	100	0.260	4190	1090	49.5	1.6
		8.00	100	0.270	3980	1075	54.0	1.6
		8.20	100	0.280	3880	1085	57.5	1.8
		8.50	100	0.290	3745	1085	61.5	1.8
		8.80	100	0.300	3615	1085	66.0	1.8
		9.00	100	0.305	3535	1080	68.5	1.8
		9.20	100	0.315	3460	1090	72.5	1.7
		9.50	100	0.325	3350	1090	77.5	1.7
		9.80	100	0.335	3250	1090	82.0	1.7

Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
Steel 1300 - 1500 N/mm²	7.60	55	0.200	2305	460	21.0	3.7
	8.00	55	0.210	2190	460	23.0	3.7
	8.20	55	0.215	2135	460	24.5	4.2
	8.50	55	0.220	2060	455	26.0	4.2
	8.80	55	0.230	1990	460	28.0	4.1
	9.00	55	0.235	1945	455	29.0	4.2
	9.20	55	0.240	1905	455	30.0	4.2
	9.50	55	0.250	1845	460	32.5	4.1
	9.80	55	0.255	1785	455	34.5	4.1
Cold work tool steel (12% Cr) high alloyed [1.2379] Stainless steel [Cr-Ni/1.4301]	7.60	70	0.200	2930	585	26.5	2.9
	8.00	70	0.210	2785	585	29.5	2.9
	8.20	70	0.215	2715	585	31.0	3.3
	8.50	70	0.220	2620	575	32.5	3.3
	8.80	70	0.230	2530	580	35.5	3.3
	9.00	70	0.235	2475	580	37.0	3.3
	9.20	70	0.240	2420	580	38.5	3.3
	9.50	70	0.250	2345	585	41.5	3.2
	9.80	70	0.255	2275	580	43.5	3.2
Titanium alloys >300 HB [Ti6Al4V]	7.60	40	0.200	1675	335	15.0	5.1
	8.00	40	0.210	1590	335	17.0	5.1
	8.20	40	0.215	1555	335	17.5	5.8
	8.50	40	0.220	1500	330	18.5	5.8
	8.80	40	0.230	1445	330	20.0	5.8
	9.00	40	0.235	1415	335	21.5	5.7
	9.20	40	0.240	1385	330	22.0	5.7
	9.50	40	0.250	1340	335	23.5	5.6
	9.80	40	0.255	1300	330	25.0	5.7
Cast iron (lamellar / spheroidal)	7.60	240	0.390	10050	3920	178.0	0.4
	8.00	240	0.410	9550	3915	197.0	0.4
	8.20	240	0.420	9315	3910	206.5	0.5
	8.50	240	0.440	8990	3955	224.5	0.5
	8.80	240	0.455	8680	3950	240.0	0.5
	9.00	240	0.465	8490	3950	251.5	0.5
	9.20	240	0.475	8305	3945	262.0	0.5
	9.50	240	0.490	8040	3940	279.5	0.5
	9.80	240	0.505	7795	3935	297.0	0.5


Spiral flute drills XDrill®

3xd

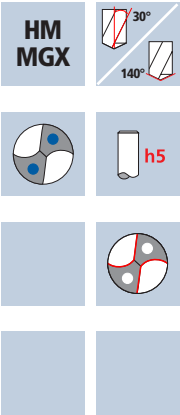

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	GG(G)
-------------	----------------	-----------------	-----------------	--------------	--	--	-------------------	----------------	-------



Example: Order-N°.							DURO-X	
Article-N°.							B72011	
ø-Code								
ø Code	d1 m7	d2 h5	l1	l2	l4	L _{max}		
.0760	7.6	8	79	41	36	28.4		●
.0770	7.7	8	79	41	36	28.4		●
.0780	7.8	8	79	41	36	28.3		●
.0790	7.9	8	79	41	36	28.4		●
.0800	8.0	8	79	41	36	28.4		●
.0810	8.1	10	89	47	40	32.3		●
.0820	8.2	10	89	47	40	32.2		●
.0830	8.3	10	89	47	40	32.2		●
.0840	8.4	10	89	47	40	32.1		●
.0850	8.5	10	89	47	40	32.1		●
.0860	8.6	10	89	47	40	31.9		●
.0870	8.7	10	89	47	40	31.9		●
.0880	8.8	10	89	47	40	31.8		●
.0890	8.9	10	89	47	40	31.8		●
.0900	9.0	10	89	47	40	31.7		●
.0910	9.1	10	89	47	40	31.7		●
.0920	9.2	10	89	47	40	31.6		●
.0930	9.3	10	89	47	40	31.6		●
.0940	9.4	10	89	47	40	31.4		●
.0950	9.5	10	89	47	40	31.4		●
.0960	9.6	10	89	47	40	31.3		●
.0970	9.7	10	89	47	40	31.3		●
.0980	9.8	10	89	47	40	31.3		●

Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
	Steel < 500 N/mm²	10.00	180	0.565	5730	3235	254.0	0.6
		10.20	180	0.575	5615	3230	264.0	0.7
		10.50	180	0.590	5455	3220	279.0	0.7
		10.80	180	0.605	5305	3210	294.0	0.7
		11.00	180	0.610	5210	3180	302.0	0.7
		11.20	180	0.615	5115	3145	310.0	0.7
		11.50	180	0.620	4980	3090	321.0	0.7
		11.80	180	0.630	4855	3060	334.5	0.7
		12.00	180	0.640	4775	3055	345.5	0.7
	Steel 500 - 850 N/mm²	10.00	160	0.485	5095	2470	194.0	0.8
		10.20	160	0.495	4995	2475	202.0	0.9
		10.50	160	0.505	4850	2450	212.0	0.9
		10.80	160	0.520	4715	2450	224.5	0.9
		11.00	160	0.525	4630	2430	231.0	0.9
		11.20	160	0.530	4545	2410	237.5	0.9
		11.50	160	0.530	4430	2350	244.0	0.9
		11.80	160	0.540	4315	2330	255.0	0.9
		12.00	160	0.550	4245	2335	264.0	0.9
	Steel 850 - 1100 N/mm²	10.00	140	0.445	4455	1980	155.5	0.9
		10.20	140	0.455	4370	1990	162.5	1.1
		10.50	140	0.465	4245	1975	171.0	1.1
		10.80	140	0.475	4125	1960	179.5	1.1
		11.00	140	0.485	4050	1965	186.5	1.1
		11.20	140	0.485	3980	1930	190.0	1.1
		11.50	140	0.490	3875	1900	197.5	1.1
		11.80	140	0.495	3775	1870	204.5	1.2
		12.00	140	0.505	3715	1875	212.0	1.2
	Steel 1100 - 1300 N/mm²	10.00	100	0.340	3185	1085	85.0	1.7
		10.20	100	0.345	3120	1075	88.0	2.1
		10.50	100	0.355	3030	1075	93.0	2.1
		10.80	100	0.365	2945	1075	98.5	2.1
		11.00	100	0.365	2895	1055	100.5	2.1
		11.20	100	0.370	2840	1050	103.5	2.1
		11.50	100	0.375	2770	1040	108.0	2.1
		11.80	100	0.380	2700	1025	112.0	2.1
		12.00	100	0.385	2655	1020	115.5	2.1

Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
Steel 1300 - 1500 N/mm²	10.00	55	0.260	1750	455	35.5	4.1
	10.20	55	0.265	1715	455	37.0	4.9
	10.50	55	0.275	1665	460	40.0	4.8
	10.80	55	0.280	1620	455	41.5	4.9
	11.00	55	0.285	1590	455	43.0	4.8
	11.20	55	0.285	1565	445	44.0	4.9
	11.50	55	0.285	1520	435	45.0	5.0
	11.80	55	0.290	1485	430	47.0	5.1
	12.00	55	0.295	1460	430	48.5	5.1
Cold work tool steel (12% Cr) high alloyed [1.2379] Stainless steel [Cr-Ni/1.4301]	10.00	70	0.260	2230	580	45.5	3.2
	10.20	70	0.265	2185	580	47.5	3.8
	10.50	70	0.275	2120	585	50.5	3.8
	10.80	70	0.280	2065	580	53.0	3.8
	11.00	70	0.285	2025	575	54.5	3.8
	11.20	70	0.285	1990	565	55.5	3.9
	11.50	70	0.285	1940	555	57.5	3.9
	11.80	70	0.290	1890	550	60.0	3.9
	12.00	70	0.295	1855	545	61.5	4.0
Titanium alloys >300 HB [Ti6Al4V]	10.00	40	0.260	1275	330	26.0	5.7
	10.20	40	0.265	1250	330	27.0	6.8
	10.50	40	0.275	1215	335	29.0	6.6
	10.80	40	0.280	1180	330	30.0	6.7
	11.00	40	0.285	1155	330	31.5	6.7
	11.20	40	0.285	1135	325	32.0	6.7
	11.50	40	0.285	1105	315	32.5	6.9
	11.80	40	0.290	1080	315	34.5	6.9
	12.00	40	0.295	1060	315	35.5	6.9
Cast iron (lamellar / spheroidal)	10.00	240	0.515	7640	3935	309.0	0.5
	10.20	240	0.520	7490	3895	318.5	0.6
	10.50	240	0.540	7275	3930	340.5	0.6
	10.80	240	0.550	7075	3890	356.5	0.6
	11.00	240	0.555	6945	3855	366.5	0.6
	11.20	240	0.560	6820	3820	376.5	0.6
	11.50	240	0.565	6645	3755	390.0	0.6
	11.80	240	0.570	6475	3690	403.5	0.6
	12.00	240	0.580	6365	3690	417.5	0.6

Spiral flute drills XDrill®

3xd

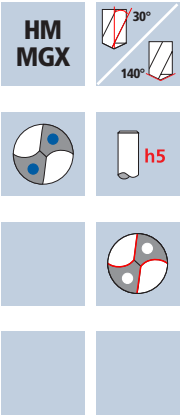


Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	GG(G)
-------------	----------------	-----------------	-----------------	--------------	--	--	-------------------	----------------	-------

Example: Order-N°.							DURO-X	
Article-N°.							B72011	
ø-Code								
ø Code	d1 m7	d2 h5	l1	l2	l4	L _{max}		
.0990	9.9	10	89	47	40	31.3		●
.1000	10.0	10	89	47	40	31.3		●
.1010	10.1	12	102	55	45	37.3		●
.1020	10.2	12	102	55	45	37.2		●
.1030	10.3	12	102	55	45	37.2		●
.1040	10.4	12	102	55	45	37.1		●
.1050	10.5	12	102	55	45	37.0		●
.1060	10.6	12	102	55	45	36.9		●
.1070	10.7	12	102	55	45	36.9		●
.1080	10.8	12	102	55	45	36.8		●
.1090	10.9	12	102	55	45	36.8		●
.1100	11.0	12	102	55	45	36.7		●
.1110	11.1	12	102	55	45	36.7		●
.1120	11.2	12	102	55	45	36.5		●
.1130	11.3	12	102	55	45	36.5		●
.1140	11.4	12	102	55	45	36.4		●
.1150	11.5	12	102	55	45	36.4		●
.1160	11.6	12	102	55	45	36.3		●
.1170	11.7	12	102	55	45	36.3		●
.1180	11.8	12	102	55	45	36.2		●
.1190	11.9	12	102	55	45	36.3		●
.1200	12.0	12	102	55	45	36.3		●

Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
	Steel < 500 N/mm ²	12.50	180	0.665	4585	3050	374.5	0.8
		13.00	180	0.695	4405	3060	406.0	0.8
		13.50	180	0.705	4340	3060	419.0	0.8
		14.00	180	0.715	4095	2930	451.0	0.8
		14.50	180	0.725	3950	2865	473.0	0.9
		15.00	180	0.745	3820	2845	503.0	0.9
		15.50	180	0.760	3695	2810	530.0	0.9
		15.80	180	0.770	3625	2790	547.0	0.9
		16.00	180	0.775	3580	2775	558.0	0.9
		12.50	160	0.570	4075	2325	285.5	1.0
	Steel 500 - 850 N/mm ²	13.00	160	0.595	3920	2330	309.5	1.0
		13.50	160	0.605	3860	2335	319.5	1.0
		14.00	160	0.610	3640	2220	341.5	1.0
		14.50	160	0.620	3510	2175	359.0	1.1
		15.00	160	0.640	3395	2175	384.5	1.1
		15.50	160	0.650	3285	2135	403.0	1.1
		15.80	160	0.660	3225	2130	417.5	1.1
		16.00	160	0.665	3185	2120	426.5	1.1
		12.50	140	0.525	3565	1870	229.5	1.2
		13.00	140	0.545	3430	1870	248.0	1.2
	Steel 850 - 1100 N/mm ²	13.50	140	0.555	3375	1875	256.5	1.2
		14.00	140	0.565	3185	1800	277.0	1.3
		14.50	140	0.570	3075	1755	290.0	1.4
		15.00	140	0.590	2970	1750	309.5	1.4
		15.50	140	0.600	2875	1725	325.5	1.4
		15.80	140	0.605	2820	1705	334.5	1.4
		16.00	140	0.610	2785	1700	342.0	1.4
		12.50	100	0.400	2545	1020	125.0	2.3
		13.00	100	0.415	2450	1015	134.5	2.3
		13.50	100	0.420	2410	1010	138.0	2.3
	Steel 1100 - 1300 N/mm ²	14.00	100	0.430	2275	980	151.0	2.3
		14.50	100	0.435	2195	955	157.5	2.6
		15.00	100	0.445	2120	945	167.0	2.6
		15.50	100	0.455	2055	935	176.5	2.6
		15.80	100	0.460	2015	925	181.5	2.6
		16.00	100	0.465	1990	925	186.0	2.6

Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
Steel 1300 - 1500 N/mm ²	12.50	55	0.310	1400	435	53.5	5.4
	13.00	55	0.320	1345	430	57.0	5.4
	13.50	55	0.325	1325	430	59.0	5.4
	14.00	55	0.330	1250	415	64.0	5.5
	14.50	55	0.335	1205	405	67.0	6.1
	15.00	55	0.345	1165	400	70.5	6.1
	15.50	55	0.350	1130	395	74.5	6.1
	15.80	55	0.355	1110	395	77.5	6.1
	16.00	55	0.355	1095	390	78.5	6.2
	12.50	70	0.310	1785	555	68.0	4.2
Cold work tool steel (12% Cr) high alloyed [1.2379] Stainless steel [Cr-Ni/1.4301]	13.00	70	0.320	1715	550	73.0	4.2
	13.50	70	0.325	1690	550	75.5	4.2
	14.00	70	0.330	1590	525	81.0	4.4
	14.50	70	0.335	1535	515	85.0	4.8
	15.00	70	0.345	1485	510	90.0	4.8
	15.50	70	0.350	1440	505	95.5	4.8
	15.80	70	0.355	1410	500	98.0	4.8
	16.00	70	0.355	1395	495	99.5	4.9
	12.50	40	0.310	1020	315	38.5	7.4
	13.00	40	0.320	980	315	42.0	7.4
Titanium alloys >300 HB [Ti6Al4V]	13.50	40	0.325	965	315	43.0	7.3
	14.00	40	0.330	910	300	46.0	7.6
	14.50	40	0.335	880	295	48.5	8.3
	15.00	40	0.345	850	295	52.0	8.3
	15.50	40	0.350	820	285	54.0	8.5
	15.80	40	0.355	805	285	56.0	8.5
	16.00	40	0.355	795	280	56.5	8.6
	12.50	240	0.605	6110	3695	453.5	0.6
	13.00	240	0.630	5875	3700	491.0	0.6
Cast iron (lamellar / spheroidal)	13.50	240	0.640	5785	3700	506.5	0.6
	14.00	240	0.650	5455	3545	545.5	0.6
	14.50	240	0.660	5270	3480	574.5	0.7
	15.00	240	0.675	5095	3440	608.0	0.7
	15.50	240	0.690	4930	3400	641.5	0.7
	15.80	240	0.700	4835	3385	663.5	0.7
	16.00	240	0.705	4775	3365	676.5	0.7

3xd



Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	GG(G)
--------------------	-----------------------	------------------------	------------------------	---------------------	--	--	--------------------------	-----------------------	--------------

[illegible]





Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
Hardened tool steel 42 - 48 HRC	3.00	35	0.060	3715	225	1.5	4.3
	4.00	35	0.080	2785	225	3.0	5.0
	4.30	35	0.085	2590	220	3.0	5.1
	5.00	35	0.100	2230	225	4.5	5.0
	5.50	35	0.110	2025	225	5.5	4.9
	6.00	35	0.120	1855	225	6.5	5.0
	6.50	35	0.130	1715	225	7.5	7.7
	6.90	35	0.135	1615	220	8.0	7.9
	8.00	35	0.155	1395	215	11.0	8.0
Hardened tool steel 48 - 52 HRC	3.00	30	0.050	3185	160	1.0	6.1
	4.00	30	0.065	2385	155	2.0	7.3
	4.30	30	0.070	2220	155	2.5	7.3
	5.00	30	0.085	1910	160	3.0	7.1
	5.50	30	0.090	1735	155	3.5	7.1
	6.00	30	0.100	1590	160	4.5	7.0
	6.50	30	0.110	1470	160	5.5	10.9
	6.90	30	0.115	1385	160	6.0	10.8
	8.00	30	0.130	1195	155	8.0	11.0
Hardened tool steel 52 - 56 HRC	3.00	20	0.045	2120	95	0.5	10.2
	4.00	20	0.055	1590	85	1.0	13.3
	4.30	20	0.060	1480	90	1.5	12.5
	5.00	20	0.070	1275	90	2.0	12.5
	5.50	20	0.080	1155	90	2.0	12.3
	6.00	20	0.085	1060	90	2.5	12.4
	6.50	20	0.095	980	95	3.0	18.3
	6.90	20	0.080	925	75	3.0	23.1
	8.00	20	0.085	795	70	3.5	24.4
Hardened tool steel 56 - 60 HRC	3.00	15	0.020	1590	30	0.0	32.4
	4.00	15	0.025	1195	30	0.5	37.8
	4.30	15	0.025	1110	30	0.5	37.5
	5.00	15	0.030	955	30	0.5	37.6
	5.50	15	0.035	870	30	0.5	36.9
	6.00	15	0.040	795	30	1.0	37.2
	6.50	15	0.040	735	30	1.0	58.1
	6.90	15	0.040	690	30	1.0	57.7
	8.00	15	0.050	595	30	1.5	57.0

Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
Hardened tool steel > 60 HRC	3.00	10	0.015	1060	15	0.0	64.8
	4.00	10	0.020	795	15	0.0	75.6
	4.30	10	0.025	740	20	0.5	56.3
	5.00	10	0.030	635	20	0.5	56.4
	5.50	10	0.030	580	15	0.5	73.8
	6.00	10	0.035	530	20	0.5	55.8
	6.50	10	0.035	490	15	0.5	116.2
	6.90	10	0.040	460	20	0.5	86.6
	8.00	10	0.045	400	20	1.0	85.5

Spiral flute drills Supradrill® HX

3xd


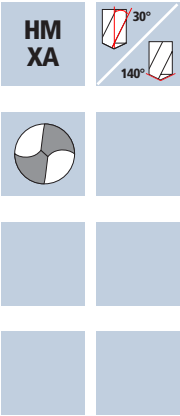


			Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60			HSS GG(G)
--	--	--	-----------------	--------------	--------------	-------------	--	--	--------------

Example: Order-N°.							DURO-SD	
Article-N°.							B52111	
ø-Code							B53111	
ø Code	d1 m7	d2 h6	l1	l2	l4	L _{max}		
.0260	2.60	6	62	20	36	14.8		●
.0300	3.00	6	62	20	36	16.2		●
.0340	3.40	6	62	20	36	15.8		●
.0350	3.50	6	62	20	36	15.8		●
.0400	4.00	6	66	24	36	18.9		●
.0420	4.20	6	66	24	36	18.8		●
.0430	4.30	6	66	24	36	18.8		●
.0450	4.50	6	66	24	36	18.6		●
.0500	5.00	6	66	28	36	18.8		●
.0510	5.10	6	66	28	36	18.8		●
.0520	5.20	6	66	28	36	18.7		●
.0550	5.50	6	66	28	36	18.5		●
.0560	5.60	6	66	28	36	18.5		●
.0600	6.00	6	66	28	36	18.6		●
.0650	6.50	8	79	34	36	29.1		●
.0670	6.70	8	79	34	36	29.0		●
.0690	6.90	8	79	34	36	28.9		●
.0700	7.00	8	79	34	36	28.8		●
.0710	7.10	8	79	41	36	28.7		●
.0750	7.50	8	79	41	36	28.5		●
.0800	8.00	8	79	41	36	28.5		●

Spiral flute drills Supradrill® HX


3xd

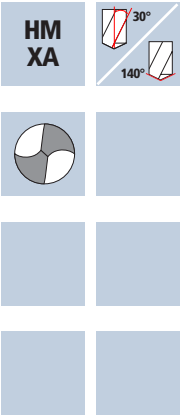

			Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60			HSS GG(G)
--	--	--	-----------------	--------------	--------------	-------------	--	--	--------------

Example: Order-N°.							DURO-SD	
Article-N°.							B52111	
ø-Code							B53111	
ø Code	d1 m7	d2 h6	l1	l2	l4	L _{max}		
.0810	8.10	10	89	47	40	32.4		●
.0850	8.50	10	89	47	40	32.1		●
.0860	8.60	10	89	47	40	32.0		●
.0885	8.85	10	89	47	40	31.8		●
.0900	9.00	10	89	47	40	31.7		●
.0910	9.10	10	89	47	40	31.7		●
.0950	9.50	10	89	47	40	31.5		●
.1000	10.00	10	89	47	40	31.5		●
.1030	10.30	12	102	55	45	37.2		●
.1040	10.40	12	102	55	45	37.1		●
.1050	10.50	12	102	55	45	37.1		●
.1070	10.70	12	102	55	45	37.0		●
.1100	11.00	12	102	55	45	36.7		●
.1150	11.50	12	102	55	45	36.5		●
.1160	11.60	12	102	55	45	36.4		●
.1190	11.90	12	102	55	45	36.4		●
.1200	12.00	12	102	55	45	36.4		●
.1210	12.10	14	107	60	45	39.3		●
.1220	12.20	14	107	60	45	39.2		●
.1250	12.50	14	107	60	45	39.1		●
.1270	12.70	14	107	60	45	39.0		●
.1300	13.00	14	107	60	45	38.7		●
.1400	14.00	14	107	60	45	38.4		●

Application



Material

Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC



d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
14.10	35	0.235	790	185	29.0	13.4
14.20	35	0.235	785	185	29.5	13.4
14.70	35	0.245	760	185	31.5	13.3
15.00	35	0.245	745	185	32.5	13.2
15.40	35	0.250	725	180	33.5	13.5
16.00	35	0.260	695	180	36.0	13.5
19.20	35	0.310	580	180	52.0	16.2
14.10	30	0.195	675	130	20.5	19.0
14.20	30	0.195	670	130	20.5	19.0
14.70	30	0.205	650	135	23.0	18.2
15.00	30	0.205	635	130	23.0	18.8
15.40	30	0.210	620	130	24.0	18.7
16.00	30	0.215	595	130	26.0	18.6
19.20	30	0.260	495	130	37.5	22.4
14.10	20	0.125	450	55	8.5	45.0
14.20	20	0.125	450	55	8.5	44.9
14.70	20	0.130	435	55	9.5	44.7
15.00	20	0.130	425	55	9.5	44.4
15.40	20	0.135	415	55	10.0	44.2
16.00	20	0.135	400	55	11.0	44.1
19.20	20	0.165	330	55	16.0	53.0
14.10	15	0.075	340	25	4.0	99.0
14.20	15	0.075	335	25	4.0	98.9
14.70	15	0.075	325	25	4.0	98.3
15.00	15	0.075	320	25	4.5	97.7
15.40	15	0.080	310	25	4.5	97.2
16.00	15	0.080	300	25	5.0	97.0
19.20	15	0.095	250	25	7.0	116.6

Material

Hardened tool steel
> 60 HRC

[illegible]

3xd



			Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60			HSS GG(G)
--	--	--	------------------------	---------------------	---------------------	--------------------	--	--	----------------------------

[illegible]



Application
Steel < 500 N/mm ²

Steel 500 - 850 N/mm ²

Steel 850 - 1100 N/mm ²

Steel 1100 - 1300 N/mm ²
--

d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
3.00	170	0.085	18040	1535	11.0	0.6
3.30	170	0.095	16400	1560	13.5	0.6
3.50	170	0.100	15460	1545	15.0	0.6
4.00	170	0.115	13530	1555	19.5	0.7
4.20	170	0.120	12885	1545	21.5	0.7
5.00	170	0.145	10825	1570	31.0	0.7
6.00	170	0.170	9020	1535	43.5	0.7
6.80	170	0.195	7960	1550	56.5	1.1
8.50	170	0.245	6365	1560	88.5	1.2
3.00	130	0.085	13795	1175	8.5	0.8
3.30	130	0.095	12540	1190	10.0	0.8
3.50	130	0.100	11825	1185	11.5	0.8
4.00	130	0.115	10345	1190	15.0	1.0
4.20	130	0.120	9850	1180	16.5	1.0
5.00	130	0.145	8275	1200	23.5	0.9
6.00	130	0.170	6895	1170	33.0	1.0
6.80	130	0.195	6085	1185	43.0	1.5
8.50	130	0.245	4870	1195	68.0	1.6
3.00	110	0.065	11670	760	5.5	1.3
3.30	110	0.075	10610	795	7.0	1.2
3.50	110	0.080	10005	800	7.5	1.2
4.00	110	0.090	8755	790	10.0	1.4
4.20	110	0.095	8335	790	11.0	1.4
5.00	110	0.110	7005	770	15.0	1.5
6.00	110	0.135	5835	790	22.5	1.4
6.80	110	0.150	5150	775	28.0	2.2
8.50	110	0.190	4120	785	44.5	2.4
3.00	70	0.055	7425	410	3.0	2.4
3.30	70	0.060	6750	405	3.5	2.4
3.50	70	0.060	6365	380	3.5	2.5
4.00	70	0.070	5570	390	5.0	2.9
4.20	70	0.075	5305	400	5.5	2.8
5.00	70	0.090	4455	400	8.0	2.8
6.00	70	0.105	3715	390	11.0	2.9
6.80	70	0.120	3275	395	14.5	4.4
8.50	70	0.150	2620	395	22.5	4.9

Material

Steel 1300 - 1500 N/mm ²
--

Cold work tool steel (12% Cr) high alloyed [1.2379] Stainless steel [Cr-Ni/1.4301]



Cast iron (lamellar / spheroidal)

Wrought aluminium alloys Si < 6%

d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
3.00	40	0.045	4245	190	1.5	5.1
3.30	40	0.045	3860	175	1.5	5.5
3.50	40	0.050	3640	180	1.5	5.3
4.00	40	0.055	3185	175	2.0	6.5
4.20	40	0.060	3030	180	2.5	6.3
5.00	40	0.070	2545	180	3.5	6.3
6.00	40	0.085	2120	180	5.0	6.2
6.80	40	0.095	1870	180	6.5	9.6
8.50	40	0.120	1500	180	10.0	10.7
3.00	60	0.045	6365	285	2.0	3.4
3.30	60	0.050	5785	290	2.5	3.3
3.50	60	0.050	5455	275	2.5	3.4
4.00	60	0.060	4775	285	3.5	4.0
4.20	60	0.065	4545	295	4.0	3.8
5.00	60	0.075	3820	285	5.5	4.0
6.00	60	0.090	3185	285	8.0	3.9
6.80	60	0.100	2810	280	10.0	6.2
8.50	60	0.125	2245	280	16.0	6.9
3.00	220	0.095	23345	2220	15.5	0.4
3.30	220	0.105	21220	2230	19.0	0.4
3.50	220	0.110	20010	2200	21.0	0.4
4.00	220	0.125	17505	2190	27.5	0.5
4.20	220	0.130	16675	2170	30.0	0.5
5.00	220	0.155	14005	2170	42.5	0.5
6.00	220	0.190	11670	2215	62.5	0.5
6.80	220	0.215	10300	2215	80.5	0.8
8.50	220	0.265	8240	2185	124.0	0.9
3.00	250	0.085	26525	2255	16.0	0.4
3.30	250	0.095	24115	2290	19.5	0.4
3.50	250	0.100	22735	2275	22.0	0.4
4.00	250	0.115	19895	2290	29.0	0.5
4.20	250	0.120	18945	2275	31.5	0.5
5.00	250	0.145	15915	2310	45.5	0.5
6.00	250	0.170	13265	2255	64.0	0.5
6.80	250	0.195	11705	2280	83.0	0.8
8.50	250	0.245	9360	2295	130.0	0.8

Spiral flute drills Supradrill® U

3xd



Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500				Inox Stainless		GG(G) Aluminium
-------------	----------------	-----------------	-----------------	--	--	--	-------------------	--	--------------------

Example: Order-N°.							NANO-U ²	
Article-N°.							B62011	
ø-Code							B63011	
ø Code	d1 m7	d2 h6	l1	l2	l4	L _{max}		
.0300	3.0	6	62	20	36	16.2		●
.0330	3.3	6	62	20	36	16.0		●
.0340	3.4	6	62	20	36	15.8		●
.0350	3.5	6	62	20	36	15.8		●
.0370	3.7	6	62	20	36	15.6		●
.0380	3.8	6	66	24	36	19.4		●
.0400	4.0	6	66	24	36	18.9		●
.0420	4.2	6	66	24	36	18.8		●
.0450	4.5	6	66	24	36	18.6		●
.0480	4.8	6	66	28	36	18.4		●
.0500	5.0	6	66	28	36	18.8		●
.0550	5.5	6	66	28	36	18.5		●
.0580	5.8	6	66	28	36	18.4		●
.0600	6.0	6	66	28	36	18.6		●
.0650	6.5	8	79	34	36	29.1		●
.0680	6.8	8	79	34	36	28.9		●
.0700	7.0	8	79	34	36	28.8		●
.0750	7.5	8	79	41	36	28.5		●
.0780	7.8	8	79	41	36	28.4		●
.0800	8.0	8	79	41	36	28.5		●
.0850	8.5	10	89	47	40	32.1		●
.0880	8.8	10	89	47	40	31.9		●
.0900	9.0	10	89	47	40	31.7		●





Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
Steel < 500 N/mm ²		10.00	170	0.285	5410	1540	121.0	1.2
		10.20	170	0.290	5305	1540	126.0	1.4
		11.00	170	0.315	4920	1550	147.5	1.4
		12.00	170	0.345	4510	1555	176.0	1.4
		13.00	170	0.370	4165	1540	204.5	1.5
		14.00	170	0.400	3865	1545	238.0	1.5
		15.00	170	0.430	3610	1550	274.0	1.6
		15.50	170	0.445	3490	1555	293.5	1.6
		16.00	170	0.455	3380	1540	309.5	1.6
		10.00	130	0.285	4140	1180	92.5	1.6
		10.20	130	0.290	4055	1175	96.0	1.9
		11.00	130	0.315	3760	1185	112.5	1.9
		12.00	130	0.345	3450	1190	134.5	1.8
		13.00	130	0.370	3185	1180	156.5	2.0
		14.00	130	0.400	2955	1180	181.5	2.0
		15.00	130	0.430	2760	1185	209.5	2.1
		15.50	130	0.445	2670	1190	224.5	2.0
		16.00	130	0.455	2585	1175	236.0	2.1
Steel 500 - 850 N/mm ²		10.00	110	0.220	3500	770	60.5	2.5
		10.20	110	0.225	3435	775	63.5	2.9
		11.00	110	0.245	3185	780	74.0	2.8
		12.00	110	0.265	2920	775	87.5	2.8
		13.00	110	0.290	2695	780	103.5	3.0
		14.00	110	0.310	2500	775	119.5	3.0
		15.00	110	0.335	2335	780	138.0	3.1
		15.50	110	0.345	2260	780	147.0	3.1
		16.00	110	0.355	2190	775	156.0	3.1
		10.00	70	0.175	2230	390	30.5	4.8
		10.20	70	0.180	2185	395	32.5	5.7
		11.00	70	0.195	2025	395	37.5	5.6
		12.00	70	0.210	1855	390	44.0	5.6
		13.00	70	0.230	1715	395	52.5	5.9
		14.00	70	0.245	1590	390	60.0	5.9
		15.00	70	0.265	1485	395	70.0	6.2
		15.50	70	0.270	1440	390	73.5	6.2
		16.00	70	0.280	1395	390	78.5	6.2

Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm³/min]	T [sek]
Steel 1300 - 1500 N/mm²	10.00	40	0.145	1275	185	14.5	10.2
	10.20	40	0.145	1250	180	14.5	12.4
	11.00	40	0.155	1155	180	17.0	12.2
	12.00	40	0.170	1060	180	20.5	12.1
	13.00	40	0.185	980	180	24.0	12.9
	14.00	40	0.200	910	180	27.5	12.8
	15.00	40	0.215	850	185	32.5	13.2
	15.50	40	0.220	820	180	34.0	13.5
	16.00	40	0.230	795	185	37.0	13.1
Cold work tool steel (12% Cr) high alloyed [1.2379] Stainless steel [Cr-Ni/1.4301]	10.00	60	0.150	1910	285	22.5	6.6
	10.20	60	0.150	1870	280	23.0	8.0
	11.00	60	0.165	1735	285	27.0	7.7
	12.00	60	0.180	1590	285	32.0	7.7
	13.00	60	0.195	1470	285	38.0	8.1
	14.00	60	0.210	1365	285	44.0	8.1
	15.00	60	0.225	1275	285	50.5	8.6
	15.50	60	0.230	1230	285	54.0	8.5
16.00	60	0.240	1195	285	57.5	8.5	
Cast iron (lamellar / spheroidal)	10.00	220	0.315	7005	2205	173.0	0.9
	10.20	220	0.320	6865	2195	179.5	1.0
	11.00	220	0.345	6365	2195	208.5	1.0
	12.00	220	0.375	5835	2190	247.5	1.0
	13.00	220	0.405	5385	2180	289.5	1.1
	14.00	220	0.440	5000	2200	338.5	1.0
	15.00	220	0.470	4670	2195	388.0	1.1
	15.50	220	0.485	4520	2190	413.0	1.1
16.00	220	0.500	4375	2190	440.5	1.1	
Wrought aluminium alloys Si < 6%	10.00	250	0.285	7960	2270	178.5	0.8
	10.20	250	0.290	7800	2260	184.5	1.0
	11.00	250	0.315	7235	2280	216.5	1.0
	12.00	250	0.345	6630	2285	258.5	1.0
	13.00	250	0.370	6120	2265	300.5	1.0
	14.00	250	0.400	5685	2275	350.0	1.0
	15.00	250	0.430	5305	2280	403.0	1.1
	15.50	250	0.445	5135	2285	431.0	1.1
16.00	250	0.455	4975	2265	455.5	1.1	

Spiral flute drills Supradrill® U

3xd



Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500				Inox Stainless		GG(G) Aluminium
-------------	----------------	-----------------	-----------------	--	--	--	-------------------	--	--------------------

Example: Order-N°.							Article-N°.		ø-Code		NANO-U ²	
							B62011		.0950		B62011	
											B63011	
ø Code	d1 m7	d2 h6	l1	l2	l4	L _{max}						
.0950	9.5	10	89	47	40	31.5					●	
.0980	9.8	10	89	47	40	31.4					●	
.1000	10.0	10	89	47	40	31.5					●	
.1020	10.2	12	102	55	45	37.2					●	
.1050	10.5	12	102	55	45	37.1					●	
.1080	10.8	12	102	55	45	36.9					●	
.1100	11.0	12	102	55	45	36.7					●	
.1150	11.5	12	102	55	45	36.5					●	
.1180	11.8	12	102	55	45	36.3					●	
.1200	12.0	12	102	55	45	36.4					●	
.1250	12.5	14	107	60	45	39.1					●	
.1280	12.8	14	107	60	45	38.9					●	
.1300	13.0	14	107	60	45	38.7					●	
.1350	13.5	14	107	60	45	38.5					●	
.1380	13.8	14	107	60	45	38.3					●	
.1400	14.0	14	107	60	45	38.4					●	
.1450	14.5	16	115	65	48	41.1					●	
.1480	14.8	16	115	65	48	40.8					●	
.1500	15.0	16	115	65	48	40.7					●	
.1550	15.5	16	115	65	48	40.5					●	
.1580	15.8	16	115	65	48	40.3					●	
.1600	16.0	16	115	65	48	40.4					●	

Application



Material

Steel
< 500 N/mm²

Steel
500 - 850 N/mm²

Steel
850 - 1100 N/mm²

Steel
1100 - 1300 N/mm²

Material

Steel
1300 - 1500 N/mm²

Cold work tool steel
(12% Cr)
high alloyed
[1.2379]
Stainless steel
[Cr-Ni/1.4301]

Titanium alloys
>300 HB
[Ti6Al4V]





Cast iron
(lamellar / spheroidal)

d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
3.00	150	0.080	15915	1275	9.0	1.3
3.30	150	0.090	14470	1300	11.0	1.2
3.50	150	0.095	13640	1295	12.5	1.2
3.80	150	0.105	12565	1320	15.0	1.6
4.00	150	0.110	11935	1315	16.5	1.6
4.20	150	0.120	11370	1365	19.0	1.5
4.50	150	0.140	10610	1485	23.5	1.4
4.80	150	0.145	9945	1440	26.0	2.0
5.00	150	0.155	9550	1480	29.0	1.9
3.00	120	0.070	12730	890	6.5	1.8
3.30	120	0.075	11575	870	7.5	1.9
3.50	120	0.080	10915	875	8.5	1.8
3.80	120	0.090	10050	905	10.5	2.3
4.00	120	0.095	9550	905	11.5	2.3
4.20	120	0.105	9095	955	13.0	2.2
4.50	120	0.120	8490	1020	16.0	2.0
4.80	120	0.125	7960	995	18.0	2.9
5.00	120	0.130	7640	995	19.5	2.9
3.00	100	0.065	10610	690	5.0	2.4
3.30	100	0.070	9645	675	6.0	2.4
3.50	100	0.075	9095	680	6.5	2.4
3.80	100	0.080	8375	670	7.5	3.2
4.00	100	0.090	7960	715	9.0	2.9
4.20	100	0.095	7580	720	10.0	2.9
4.50	100	0.110	7075	780	12.5	2.7
4.80	100	0.115	6630	760	14.0	3.7
5.00	100	0.120	6365	765	15.0	3.7
3.00	70	0.050	7425	370	2.5	4.4
3.30	70	0.055	6750	370	3.0	4.4
3.50	70	0.055	6365	350	3.5	4.6
3.80	70	0.060	5865	350	4.0	6.1
4.00	70	0.065	5570	360	4.5	5.8
4.20	70	0.070	5305	370	5.0	5.6
4.50	70	0.085	4950	420	6.5	4.9
4.80	70	0.090	4640	420	7.5	6.8
5.00	70	0.090	4455	400	8.0	7.2

d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
3.00	40	0.035	4245	150	1.0	10.9
3.30	40	0.040	3860	155	1.5	10.4
3.50	40	0.045	3640	165	1.5	9.7
3.80	40	0.045	3350	150	1.5	14.2
4.00	40	0.050	3185	160	2.0	13.1
4.20	40	0.055	3030	165	2.5	12.7
4.50	40	0.065	2830	185	3.0	11.2
4.80	40	0.070	2655	185	3.5	15.4
5.00	40	0.070	2545	180	3.5	15.9
3.00	60	0.035	6365	225	1.5	7.3
3.30	60	0.040	5785	230	2.0	7.0
3.50	60	0.045	5455	245	2.5	6.6
3.80	60	0.045	5025	225	2.5	9.4
4.00	60	0.050	4775	240	3.0	8.7
4.20	60	0.055	4545	250	3.5	8.4
4.50	60	0.065	4245	275	4.5	7.5
4.80	60	0.070	3980	280	5.0	10.2
5.00	60	0.070	3820	265	5.0	10.8
3.00	35	0.035	3715	130	1.0	12.6
3.30	35	0.040	3375	135	1.0	12.0
3.50	35	0.045	3185	145	1.5	11.1
3.80	35	0.045	2930	130	1.5	16.3
4.00	35	0.050	2785	140	2.0	15.0
4.20	35	0.055	2655	145	2.0	14.4
4.50	35	0.065	2475	160	2.5	13.0
4.80	35	0.070	2320	160	3.0	17.8
5.00	35	0.070	2230	155	3.0	18.5
3.00	220	0.075	23345	1750	12.5	0.9
3.30	220	0.080	21220	1700	14.5	1.0
3.50	220	0.085	20010	1700	16.5	0.9
3.80	220	0.095	18430	1750	20.0	1.2
4.00	220	0.100	17505	1750	22.0	1.2
4.20	220	0.110	16675	1835	25.5	1.1
4.50	220	0.125	15560	1945	31.0	1.1
4.80	220	0.135	14590	1970	35.5	1.4
5.00	220	0.140	14005	1960	38.5	1.5

Spiral flute drills XDrill®

8xd



Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500				Inox Stainless	Ti Titanium	GG(G)
-------------	----------------	-----------------	-----------------	--	--	--	-------------------	----------------	-------





Example: Order-N°.							DURO-X	
Article-N°.							B72020	
ø-Code								
ø Code	d1 m7	d2 h5	l1	l2	l4	L _{max}		
.0300	3.0	6	73	34	36	27.2		●
.0310	3.1	6	73	34	36	27.2		●
.0320	3.2	6	73	34	36	27.0		●
.0330	3.3	6	73	34	36	27.0		●
.0340	3.4	6	73	34	36	26.8		●
.0350	3.5	6	73	34	36	26.8		●
.0360	3.6	6	73	34	36	26.6		●
.0370	3.7	6	73	34	36	26.6		●
.0380	3.8	6	82	43	36	35.4		●
.0390	3.9	6	82	43	36	35.4		●
.0400	4.0	6	82	43	36	34.9		●
.0410	4.1	6	82	43	36	34.9		●
.0420	4.2	6	82	43	36	34.8		●
.0430	4.3	6	82	43	36	34.7		●
.0440	4.4	6	82	43	36	34.6		●
.0450	4.5	6	82	43	36	34.6		●
.0460	4.6	6	82	43	36	34.5		●
.0470	4.7	6	82	43	36	34.5		●
.0480	4.8	6	95	56	36	47.4		●
.0490	4.9	6	95	56	36	47.3		●
.0500	5.0	6	95	56	36	47.7		●
.0510	5.1	6	95	56	36	47.7		●
.0520	5.2	6	95	56	36	47.6		●

Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
	Steel < 500 N/mm²	5.50	150	0.170	8680	1475	35.0	1.9
		5.80	150	0.180	8230	1480	39.0	1.9
		6.00	150	0.190	7960	1510	42.5	1.9
		6.20	150	0.205	7700	1580	47.5	2.1
		6.50	150	0.210	7345	1540	51.0	2.1
		6.80	150	0.220	7020	1545	56.0	2.1
		7.00	150	0.230	6820	1570	60.5	2.1
		7.20	150	0.235	6630	1560	63.5	2.5
		7.50	150	0.245	6365	1560	69.0	2.5
		7.50	150	0.245	6365	1560	69.0	2.5
	Steel 500 - 850 N/mm²	5.50	120	0.145	6945	1005	24.0	2.8
		5.80	120	0.150	6585	990	26.0	2.9
		6.00	120	0.165	6365	1050	29.5	2.7
		6.20	120	0.175	6160	1080	32.5	3.1
		6.50	120	0.180	5875	1060	35.0	3.1
		6.80	120	0.190	5615	1065	38.5	3.1
		7.00	120	0.195	5455	1065	41.0	3.1
		7.20	120	0.200	5305	1060	43.0	3.7
		7.50	120	0.210	5095	1070	47.5	3.6
		7.50	120	0.210	5095	1070	47.5	3.6
	Steel 850 - 1100 N/mm²	5.50	100	0.135	5785	780	18.5	3.7
		5.80	100	0.140	5490	770	20.5	3.7
		6.00	100	0.150	5305	795	22.5	3.6
		6.20	100	0.160	5135	820	25.0	4.0
		6.50	100	0.170	4895	830	27.5	4.0
		6.80	100	0.175	4680	820	30.0	4.0
		7.00	100	0.180	4545	820	31.5	4.0
		7.20	100	0.185	4420	820	33.5	4.7
		7.50	100	0.195	4245	830	36.5	4.7
		7.50	100	0.195	4245	830	36.5	4.7
	Steel 1100 - 1300 N/mm²	5.50	70	0.100	4050	405	9.5	7.0
		5.80	70	0.105	3840	405	10.5	7.0
		6.00	70	0.115	3715	425	12.0	6.7
		6.20	70	0.120	3595	430	13.0	7.7
		6.50	70	0.125	3430	430	14.5	7.7
		6.80	70	0.135	3275	440	16.0	7.5
		7.00	70	0.135	3185	430	16.5	7.6
		7.20	70	0.140	3095	435	17.5	8.9
		7.50	70	0.145	2970	430	19.0	9.0
		7.50	70	0.145	2970	430	19.0	9.0

Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
Steel 1300 - 1500 N/mm²	5.50	40	0.080	2315	185	4.5	15.4
	5.80	40	0.080	2195	175	4.5	16.2
	6.00	40	0.090	2120	190	5.5	14.9
	6.20	40	0.095	2055	195	6.0	17.0
	6.50	40	0.100	1960	195	6.5	16.9
	6.80	40	0.105	1870	195	7.0	16.9
	7.00	40	0.105	1820	190	7.5	17.3
	7.20	40	0.110	1770	195	8.0	19.9
	7.50	40	0.115	1700	195	8.5	19.8
	7.50	40	0.115	1700	195	8.5	19.8
Cold work tool steel (12% Cr) high alloyed [1.2379] Stainless steel [Cr-Ni/1.4301]	5.50	60	0.080	3470	280	6.5	10.2
	5.80	60	0.080	3295	265	7.0	10.7
	6.00	60	0.090	3185	285	8.0	9.9
	6.20	60	0.095	3080	295	9.0	11.2
	6.50	60	0.100	2940	295	10.0	11.2
	6.80	60	0.105	2810	295	10.5	11.1
	7.00	60	0.105	2730	285	11.0	11.5
	7.20	60	0.110	2655	290	12.0	13.4
	7.50	60	0.115	2545	295	13.0	13.1
	7.50	60	0.115	2545	295	13.0	13.1
Titanium alloys >300 HB [Ti6Al4V]	5.50	35	0.080	2025	160	4.0	17.8
	5.80	35	0.080	1920	155	4.0	18.3
	6.00	35	0.090	1855	165	4.5	17.2
	6.20	35	0.095	1795	170	5.0	19.5
	6.50	35	0.100	1715	170	5.5	19.4
	6.80	35	0.105	1640	170	6.0	19.3
	7.00	35	0.105	1590	165	6.5	19.9
	7.20	35	0.110	1545	170	7.0	22.8
	7.50	35	0.115	1485	170	7.5	22.7
	7.50	35	0.115	1485	170	7.5	22.7
Cast iron (lamellar / spheroidal)	5.50	220	0.155	12730	1975	47.0	1.4
	5.80	220	0.160	12075	1930	51.0	1.5
	6.00	220	0.175	11670	2040	57.5	1.4
	6.20	220	0.185	11295	2090	63.0	1.6
	6.50	220	0.195	10775	2100	69.5	1.6
	6.80	220	0.200	10300	2060	75.0	1.6
	7.00	220	0.210	10005	2100	81.0	1.6
	7.20	220	0.215	9725	2090	85.0	1.9
	7.50	220	0.225	9335	2100	93.0	1.8
	7.50	220	0.225	9335	2100	93.0	1.8


Spiral flute drills XDrill®

8xd



Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500				Inox Stainless	Ti Titanium	GG(G)
-------------	----------------	-----------------	-----------------	--	--	--	-------------------	----------------	-------





Example: Order-N°.							DURO-X	
Article-N°.							B72020	
ø-Code								
ø Code	d1 m7	d2 h5	l1	l2	l4	L _{max}		
.0530	5.3	6	95	56	36	47.6		●
.0540	5.4	6	95	56	36	47.5		●
.0550	5.5	6	95	56	36	47.5		●
.0560	5.6	6	95	56	36	47.4		●
.0570	5.7	6	95	56	36	47.4		●
.0580	5.8	6	95	56	36	47.3		●
.0590	5.9	6	95	56	36	47.4		●
.0600	6.0	6	95	56	36	47.2		●
.0610	6.1	8	105	66	36	55.3		●
.0620	6.2	8	105	66	36	55.2		●
.0630	6.3	8	105	66	36	55.2		●
.0640	6.4	8	105	66	36	55.1		●
.0650	6.5	8	105	66	36	55.1		●
.0660	6.6	8	105	66	36	55.0		●
.0670	6.7	8	105	66	36	55.0		●
.0680	6.8	8	105	66	36	54.8		●
.0690	6.9	8	105	66	36	54.8		●
.0700	7.0	8	105	66	36	54.7		●
.0710	7.1	8	115	76	36	64.7		●
.0720	7.2	8	115	76	36	64.6		●
.0730	7.3	8	115	76	36	64.6		●
.0740	7.4	8	115	76	36	64.4		●
.0750	7.5	8	115	76	36	64.4		●

Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
	Steel < 500 N/mm ²	7.60	150	0.250	6280	1570	71.0	2.5
		8.00	150	0.260	5970	1550	78.0	2.5
		8.20	150	0.270	5825	1575	83.0	2.8
		8.50	150	0.280	5615	1570	89.0	2.7
		8.80	150	0.285	5425	1545	94.0	2.8
		9.00	150	0.295	5305	1565	99.5	2.7
		9.20	150	0.300	5190	1555	103.5	3.1
		9.50	150	0.310	5025	1560	110.5	3.1
		9.80	150	0.320	4870	1560	117.5	3.1
		7.60	120	0.215	5025	1080	49.0	3.6
	Steel 500 - 850 N/mm ²	8.00	120	0.225	4775	1075	54.0	3.6
		8.20	120	0.230	4660	1070	56.5	4.0
		8.50	120	0.240	4495	1080	61.5	4.0
		8.80	120	0.245	4340	1065	65.0	4.0
		9.00	120	0.250	4245	1060	67.5	4.1
		9.20	120	0.260	4150	1080	72.0	4.5
		9.50	120	0.265	4020	1065	75.5	4.5
		9.80	120	0.275	3900	1075	81.0	4.5
		7.60	100	0.195	4190	815	37.0	4.7
		8.00	100	0.205	3980	815	41.0	4.7
	Steel 850 - 1100 N/mm ²	8.20	100	0.210	3880	815	43.0	5.3
		8.50	100	0.220	3745	825	47.0	5.2
		8.80	100	0.225	3615	815	49.5	5.3
		9.00	100	0.230	3535	815	52.0	5.3
		9.20	100	0.235	3460	815	54.0	5.9
		9.50	100	0.245	3350	820	58.0	5.9
		9.80	100	0.255	3250	830	62.5	5.8
		7.60	70	0.150	2930	440	20.0	8.8
		8.00	70	0.155	2785	430	21.5	8.9
		8.20	70	0.160	2715	435	23.0	10.0
	Steel 1100 - 1300 N/mm ²	8.50	70	0.165	2620	430	24.5	10.0
		8.80	70	0.170	2530	430	26.0	10.0
		9.00	70	0.175	2475	435	27.5	9.9
		9.20	70	0.180	2420	435	29.0	11.1
		9.50	70	0.185	2345	435	31.0	11.1
		9.80	70	0.190	2275	430	32.5	11.2

Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
Steel 1300 - 1500 N/mm ²	7.60	40	0.115	1675	195	9.0	19.8
	8.00	40	0.120	1590	190	9.5	20.2
	8.20	40	0.125	1555	195	10.5	22.2
	8.50	40	0.130	1500	195	11.0	22.1
	8.80	40	0.135	1445	195	12.0	22.1
	9.00	40	0.135	1415	190	12.0	22.6
	9.20	40	0.140	1385	195	13.0	24.8
	9.50	40	0.145	1340	195	14.0	24.7
	9.80	40	0.150	1300	195	14.5	24.7
	7.60	60	0.115	2515	290	13.0	13.3
Cold work tool steel (12% Cr) high alloyed [1.2379] Stainless steel [Cr-Ni/1.4301]	8.00	60	0.120	2385	285	14.5	13.5
	8.20	60	0.125	2330	290	15.5	14.9
	8.50	60	0.130	2245	290	16.5	14.9
	8.80	60	0.135	2170	295	18.0	14.6
	9.00	60	0.135	2120	285	18.0	15.1
	9.20	60	0.140	2075	290	19.5	16.7
	9.50	60	0.145	2010	290	20.5	16.6
	9.80	60	0.150	1950	295	22.5	16.3
	7.60	35	0.115	1465	170	7.5	22.7
	8.00	35	0.120	1395	165	8.5	23.3
Titanium alloys >300 HB [Ti6Al4V]	8.20	35	0.125	1360	170	9.0	25.5
	8.50	35	0.130	1310	170	9.5	25.4
	8.80	35	0.135	1265	170	10.5	25.3
	9.00	35	0.135	1240	165	10.5	26.1
	9.20	35	0.140	1210	170	11.5	28.4
	9.50	35	0.145	1175	170	12.0	28.4
	9.80	35	0.150	1135	170	13.0	28.3
	7.60	220	0.225	9215	2075	94.0	1.9
	8.00	220	0.240	8755	2100	105.5	1.8
	8.20	220	0.245	8540	2090	110.5	2.1
Cast iron (lamellar / spheroidal)	8.50	220	0.250	8240	2060	117.0	2.1
	8.80	220	0.260	7960	2070	126.0	2.1
	9.00	220	0.265	7780	2060	131.0	2.1
	9.20	220	0.275	7610	2095	139.5	2.3
	9.50	220	0.280	7370	2065	146.5	2.3
	9.80	220	0.290	7145	2070	156.0	2.3

Spiral flute drills XDrill®

8xd







Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500				Inox Stainless	Ti Titanium	GG(G)
-------------	----------------	-----------------	-----------------	--	--	--	-------------------	----------------	-------

Example: Order-N°.							DURO-X	
Article-N°.							B72020	
ø-Code								
ø Code	d1 m7	d2 h5	l1	l2	l4	L _{max}		
.0760	7.6	8	115	76	36	64.3		●
.0770	7.7	8	115	76	36	64.4		●
.0780	7.8	8	115	76	36	64.3		●
.0790	7.9	8	115	76	36	64.3		●
.0800	8.0	8	115	76	36	64.1		●
.0810	8.1	10	129	86	40	72.3		●
.0820	8.2	10	129	86	40	72.2		●
.0830	8.3	10	129	86	40	72.2		●
.0840	8.4	10	129	86	40	72.1		●
.0850	8.5	10	129	86	40	72.0		●
.0860	8.6	10	129	86	40	71.9		●
.0870	8.7	10	129	86	40	71.9		●
.0880	8.8	10	129	86	40	71.8		●
.0890	8.9	10	129	86	40	71.8		●
.0900	9.0	10	129	86	40	71.7		●
.0910	9.1	10	138	95	40	80.7		●
.0920	9.2	10	138	95	40	80.5		●
.0930	9.3	10	138	95	40	80.5		●
.0940	9.4	10	138	95	40	80.4		●
.0950	9.5	10	138	95	40	80.4		●
.0960	9.6	10	138	95	40	80.3		●
.0970	9.7	10	138	95	40	80.3		●
.0980	9.8	10	138	95	40	80.2		●

Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
	Steel < 500 N/mm ²	10.00	150	0.325	4775	1550	121.5	3.1
		10.20	150	0.335	4680	1570	128.5	3.4
		10.50	150	0.345	4545	1570	136.0	3.4
		10.80	150	0.350	4420	1545	141.5	3.4
		11.00	150	0.355	4340	1540	146.5	3.4
		11.50	150	0.360	4150	1495	155.5	3.9
		11.80	150	0.360	4045	1455	159.0	4.0
		12.00	150	0.370	3980	1475	167.0	3.9
		12.50	150	0.385	3820	1470	180.5	4.6
	Steel 500 - 850 N/mm ²	10.00	120	0.280	3820	1070	84.0	4.5
		10.20	120	0.285	3745	1065	87.0	5.0
		10.50	120	0.295	3640	1075	93.0	4.9
		10.80	120	0.300	3535	1060	97.0	5.0
		11.00	120	0.305	3470	1060	100.5	5.0
		11.50	120	0.310	3320	1030	107.0	5.6
		11.80	120	0.310	3235	1005	110.0	5.7
		12.00	120	0.315	3185	1005	113.5	5.7
		12.50	120	0.330	3055	1010	124.0	6.7
	Steel 850 - 1100 N/mm ²	10.00	100	0.260	3185	830	65.0	5.8
		10.20	100	0.265	3120	825	67.5	6.4
		10.50	100	0.270	3030	820	71.0	6.4
		10.80	100	0.275	2945	810	74.0	6.5
		11.00	100	0.280	2895	810	77.0	6.5
		11.50	100	0.285	2770	790	82.0	7.3
		11.80	100	0.285	2700	770	84.0	7.5
		12.00	100	0.290	2655	770	87.0	7.5
		12.50	100	0.305	2545	775	95.0	8.7
	Steel 1100 - 1300 N/mm ²	10.00	70	0.195	2230	435	34.0	11.0
		10.20	70	0.200	2185	435	35.5	12.2
		10.50	70	0.205	2120	435	37.5	12.1
		10.80	70	0.210	2065	435	40.0	12.1
		11.00	70	0.215	2025	435	41.5	12.1
		11.50	70	0.215	1940	415	43.0	13.9
		11.80	70	0.215	1890	405	44.5	14.3
		12.00	70	0.220	1855	410	46.5	14.0
		12.50	70	0.230	1785	410	50.5	16.5
Material		d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
Steel 1300 - 1500 N/mm ²		10.00	40	0.150	1275	190	15.0	25.3
		10.20	40	0.155	1250	195	16.0	27.1
		10.50	40	0.160	1215	195	17.0	27.1
		10.80	40	0.160	1180	190	17.5	27.7
		11.00	40	0.165	1155	190	18.0	27.7
		11.50	40	0.165	1105	180	18.5	32.1
		11.80	40	0.165	1080	180	19.5	32.1
		12.00	40	0.170	1060	180	20.5	32.0
		12.50	40	0.175	1020	180	22.0	37.6
Cold work tool steel (12% Cr) high alloyed [1.2379] Stainless steel [Cr-Ni/1.4301]		10.00	60	0.150	1910	285	22.5	16.8
		10.20	60	0.155	1870	290	23.5	18.2
		10.50	60	0.160	1820	290	25.0	18.2
		10.80	60	0.160	1770	285	26.0	18.5
		11.00	60	0.165	1735	285	27.0	18.4
		11.50	60	0.165	1660	275	28.5	21.0
		11.80	60	0.165	1620	265	29.0	21.8
		12.00	60	0.170	1590	270	30.5	21.3
		12.50	60	0.175	1530	270	33.0	25.1
Titanium alloys >300 HB [Ti6Al4V]		10.00	35	0.150	1115	165	13.0	29.1
		10.20	35	0.155	1090	170	14.0	31.1
		10.50	35	0.160	1060	170	14.5	31.0
		10.80	35	0.160	1030	165	15.0	31.9
		11.00	35	0.165	1015	165	15.5	31.9
		11.50	35	0.165	970	160	16.5	36.1
		11.80	35	0.165	945	155	17.0	37.2
		12.00	35	0.170	930	160	18.0	36.0
		12.50	35	0.175	890	155	19.0	43.7
Cast iron (lamellar / spheroidal)		10.00	220	0.295	7005	2065	162.0	2.3
		10.20	220	0.305	6865	2095	171.0	2.5
		10.50	220	0.310	6670	2070	179.0	2.5
		10.80	220	0.315	6485	2045	187.5	2.6
		11.00	220	0.325	6365	2070	196.5	2.5
		11.50	220	0.330	6090	2010	209.0	2.9
		11.80	220	0.330	5935	1960	214.5	2.9
		12.00	220	0.335	5835	1955	221.0	2.9
		12.50	220	0.350	5600	1960	240.5	3.5


Spiral flute drills XDrill®

8xd




Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500				Inox Stainless	Ti Titanium	GG(G)
-------------	----------------	-----------------	-----------------	--	--	--	-------------------	----------------	-------

Example: Order-N°.							DURO-X	
Article-N°.							B72020	
ø-Code								
ø Code	d1 m7	d2 h5	l1	l2	l4	L _{max}		
.0990	9.9	10	138	95	40	80.3		●
.1000	10.0	10	138	95	40	80.0		●
.1010	10.1	12	153	105	45	88.3		●
.1020	10.2	12	153	105	45	88.2		●
.1030	10.3	12	153	105	45	88.1		●
.1040	10.4	12	153	105	45	88.0		●
.1050	10.5	12	153	105	45	88.0		●
.1060	10.6	12	153	105	45	87.9		●
.1070	10.7	12	153	105	45	87.9		●
.1080	10.8	12	153	105	45	87.8		●
.1090	10.9	12	153	105	45	87.8		●
.1100	11.0	12	153	105	45	87.6		●
.1110	11.1	12	162	114	45	96.6		●
.1120	11.2	12	162	114	45	96.5		●
.1130	11.3	12	162	114	45	96.5		●
.1140	11.4	12	162	114	45	96.4		●
.1150	11.5	12	162	114	45	96.4		●
.1160	11.6	12	162	114	45	96.3		●
.1170	11.7	12	162	114	45	96.3		●
.1180	11.8	12	162	114	45	96.2		●
.1190	11.9	12	162	114	45	96.2		●
.1200	12.0	12	162	114	45	95.9		●
.1250	12.5	14	181	133	45	113.0		●

Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
	Steel < 500 N/mm ²	12.80	150	0.395	3730	1475	190.0	4.6
		13.00	150	0.400	3675	1470	195.0	4.6
		13.50	150	0.405	3615	1465	200.5	4.6
		14.00	150	0.410	3410	1400	215.5	4.8
		14.50	150	0.420	3295	1385	228.5	5.6
		14.80	150	0.425	3225	1370	235.5	5.6
		15.00	150	0.430	3185	1370	242.0	5.6
		15.50	150	0.440	3080	1355	255.5	5.7
		16.00	150	0.450	2985	1345	270.5	5.7
	Steel 500 - 850 N/mm ²	12.80	120	0.335	2985	1000	128.5	6.8
		13.00	120	0.340	2940	1000	132.5	6.8
		13.50	120	0.345	2895	1000	137.0	6.7
		14.00	120	0.350	2730	955	147.0	7.0
		14.50	120	0.360	2635	950	157.0	8.1
		14.80	120	0.365	2580	940	161.5	8.2
		15.00	120	0.370	2545	940	166.0	8.2
		15.50	120	0.375	2465	925	174.5	8.3
		16.00	120	0.385	2385	920	185.0	8.3
	Steel 850 - 1100 N/mm ²	12.80	100	0.310	2485	770	99.0	8.8
		13.00	100	0.315	2450	770	102.0	8.8
		13.50	100	0.320	2410	770	105.5	8.7
		14.00	100	0.325	2275	740	114.0	9.1
		14.50	100	0.330	2195	725	119.5	10.7
		14.80	100	0.335	2150	720	124.0	10.7
		15.00	100	0.340	2120	720	127.0	10.7
		15.50	100	0.345	2055	710	134.0	10.8
		16.00	100	0.355	1990	705	141.5	10.9
	Steel 1100 - 1300 N/mm ²	12.80	70	0.235	1740	410	53.0	16.5
		13.00	70	0.240	1715	410	54.5	16.5
		13.50	70	0.245	1690	415	57.0	16.2
		14.00	70	0.245	1590	390	60.0	17.2
		14.50	70	0.250	1535	385	63.5	20.1
		14.80	70	0.255	1505	385	66.0	20.1
		15.00	70	0.260	1485	385	68.0	20.0
		15.50	70	0.265	1440	380	71.5	20.3
		16.00	70	0.270	1395	375	75.5	20.4


Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
Steel 1300 - 1500 N/mm ²	12.80	40	0.180	995	180	23.0	37.6
	13.00	40	0.185	980	180	24.0	37.5
	13.50	40	0.185	965	180	24.5	37.4
	14.00	40	0.190	910	175	27.0	38.4
	14.50	40	0.195	880	170	28.0	45.5
	14.80	40	0.195	860	170	29.0	45.4
	15.00	40	0.200	850	170	30.0	45.4
	15.50	40	0.205	820	170	32.0	45.3
	16.00	40	0.205	795	165	33.0	46.5
Cold work tool steel (12% Cr) high alloyed [1.2379] Stainless steel [Cr-Ni/1.4301]	12.80	60	0.180	1490	270	34.5	25.0
	13.00	60	0.185	1470	270	36.0	25.0
	13.50	60	0.185	1445	265	36.5	25.4
	14.00	60	0.190	1365	260	40.0	25.8
	14.50	60	0.195	1315	255	42.0	30.3
	14.80	60	0.195	1290	250	43.0	30.9
	15.00	60	0.200	1275	255	45.0	30.3
	15.50	60	0.205	1230	250	47.0	30.8
	16.00	60	0.205	1195	245	49.5	31.3
Titanium alloys >300 HB [Ti6Al4V]	12.80	35	0.180	870	155	20.0	43.6
	13.00	35	0.185	855	160	21.0	42.2
	13.50	35	0.185	845	155	21.0	43.5
	14.00	35	0.190	795	150	23.0	44.8
	14.50	35	0.195	770	150	25.0	51.5
	14.80	35	0.195	755	145	25.0	53.3
	15.00	35	0.200	745	150	26.5	51.4
	15.50	35	0.205	720	150	28.5	51.3
	16.00	35	0.205	695	140	28.0	54.8
Cast iron (lamellar / spheroidal)	12.80	220	0.355	5470	1940	249.5	3.5
	13.00	220	0.360	5385	1940	257.5	3.5
	13.50	220	0.370	5305	1965	269.0	3.4
	14.00	220	0.375	5000	1875	288.5	3.6
	14.50	220	0.380	4830	1835	303.0	4.2
	14.80	220	0.385	4730	1820	313.0	4.2
	15.00	220	0.390	4670	1820	321.5	4.2
	15.50	220	0.400	4520	1810	341.5	4.3
	16.00	220	0.405	4375	1770	356.0	4.3

8xd



Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500				Inox Stainless	Ti Titanium	GG(G)
--------------------	-----------------------	------------------------	------------------------	--	--	--	--------------------------	-----------------------	--------------


[illegible]

Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm³/min]	T [sek]
	Steel < 500 N/mm²	4.00	130	0.085	10345	880	11.0	2.4
		5.00	130	0.105	8275	870	17.0	3.3
		6.00	130	0.125	6895	860	24.5	3.3
		7.00	130	0.145	5910	855	33.0	4.5
		8.00	130	0.170	5175	880	44.0	4.3
		9.00	130	0.190	4600	875	55.5	5.5
		10.00	130	0.210	4140	870	68.5	5.5
		11.00	130	0.230	3760	865	82.0	6.7
		12.00	130	0.255	3450	880	99.5	6.6
	Steel 500 - 850 N/mm²	4.00	100	0.085	7960	675	8.5	3.1
		5.00	100	0.105	6365	670	13.0	4.3
		6.00	100	0.125	5305	665	19.0	4.3
		7.00	100	0.145	4545	660	25.5	5.8
		8.00	100	0.170	3980	675	34.0	5.6
		9.00	100	0.190	3535	670	42.5	7.2
		10.00	100	0.210	3185	670	52.5	7.2
		11.00	100	0.230	2895	665	63.0	8.7
		12.00	100	0.255	2655	675	76.5	8.6
	Steel 850 - 1100 N/mm²	4.00	70	0.065	5570	360	4.5	5.8
		5.00	70	0.080	4455	355	7.0	8.1
		6.00	70	0.095	3715	355	10.0	8.0
		7.00	70	0.110	3185	350	13.5	10.9
		8.00	70	0.130	2785	360	18.0	10.5
		9.00	70	0.145	2475	360	23.0	13.5
		10.00	70	0.160	2230	355	28.0	13.6
		11.00	70	0.175	2025	355	33.5	16.3
		12.00	70	0.190	1855	350	39.5	16.5
	Steel 1100 - 1300 N/mm²	4.00	50	0.055	3980	220	3.0	9.5
		5.00	50	0.065	3185	205	4.0	14.0
		6.00	50	0.080	2655	210	6.0	13.5
		7.00	50	0.095	2275	215	8.5	17.8
		8.00	50	0.105	1990	210	10.5	18.1
		9.00	50	0.120	1770	210	13.5	23.1
		10.00	50	0.135	1590	215	17.0	22.4
		11.00	50	0.145	1445	210	20.0	27.6
		12.00	50	0.160	1325	210	24.0	27.5

Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm³/min]	T [sek]	
Cold work tool steel (12% Cr) high alloyed [1.2379] Stainless steel [Cr-Ni/1.4301]	4.00	50	0.045	3980	180	2.5	11.6	
	5.00	50	0.055	3185	175	3.5	16.4	
	6.00	50	0.070	2655	185	5.0	15.4	
	7.00	50	0.080	2275	180	7.0	21.2	
	8.00	50	0.090	1990	180	9.0	21.1	
	9.00	50	0.105	1770	185	12.0	26.2	
	10.00	50	0.115	1590	185	14.5	26.0	
	11.00	50	0.125	1445	180	17.0	32.2	
	12.00	50	0.135	1325	180	20.5	32.1	
Cast iron (lamellar / spheroidal)	4.00	150	0.090	11935	1075	13.5	1.9	
	5.00	150	0.115	9550	1100	21.5	2.6	
	6.00	150	0.135	7960	1075	30.5	2.6	
	7.00	150	0.160	6820	1090	42.0	3.5	
	8.00	150	0.185	5970	1105	55.5	3.4	
	9.00	150	0.205	5305	1090	69.5	4.4	
	10.00	150	0.230	4775	1100	86.5	4.4	
	11.00	150	0.250	4340	1085	103.0	5.3	
	12.00	150	0.275	3980	1095	124.0	5.3	
Wrought aluminium alloys Si < 6%	4.00	200	0.080	15915	1275	16.0	1.6	
	5.00	200	0.100	12730	1275	25.0	2.2	
	6.00	200	0.120	10610	1275	36.0	2.2	
	7.00	200	0.140	9095	1275	49.0	3.0	
	8.00	200	0.160	7960	1275	64.0	3.0	
	9.00	200	0.180	7075	1275	81.0	3.8	
	10.00	200	0.200	6365	1275	100.0	3.8	
	11.00	200	0.220	5785	1275	121.0	4.5	
	12.00	200	0.240	5305	1275	144.0	4.5	

Spiral flute drills Supradrill® N

8xd



Rm < 850	Rm 850-1100	Rm 1100-1300					Inox Stainless		GG(G) Aluminium
-------------	----------------	-----------------	--	--	--	--	-------------------	--	--------------------

Example: Order-N°.							Article-N°.		ø-Code				DURO-SD	
							B52020		.0400				B52020	
													B53020	
ø Code	d1 m7	d2 h6	l1	l2	l4	L _{max}								
.0400	4.0	6	82	44	36	34.9							●	
.0420	4.2	6	82	44	36	34.8							●	
.0450	4.5	6	82	44	36	34.6							●	
.0480	4.8	6	82	44	36	34.4							●	
.0500	5.0	6	95	57	36	47.7							●	
.0550	5.5	6	95	57	36	47.5							●	
.0580	5.8	6	95	57	36	47.3							●	
.0600	6.0	6	95	57	36	47.4							●	
.0650	6.5	8	114	76	36	64.1							●	
.0680	6.8	8	114	76	36	63.8							●	
.0700	7.0	8	114	76	36	63.7							●	
.0750	7.5	8	114	76	36	63.4							●	
.0780	7.8	8	114	76	36	63.3							●	
.0800	8.0	8	114	76	36	63.3							●	
.0850	8.5	10	138	95	40	81.0							●	
.0900	9.0	10	138	95	40	80.7							●	
.0950	9.5	10	138	95	40	80.4							●	
.1000	10.0	10	138	95	40	80.2							●	
.1050	10.5	12	162	114	45	97.0							●	
.1100	11.0	12	162	114	45	96.6							●	
.1150	11.5	12	162	114	45	96.4							●	
.1200	12.0	12	162	114	45	96.2							●	



Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
Steel < 500 N/mm ²		12.50	130	0.265	3310	875	107.5	7.7
		13.00	130	0.275	3185	875	116.0	7.7
		13.50	130	0.285	3065	875	125.0	7.7
		14.00	130	0.295	2955	870	134.0	7.7
		14.50	130	0.305	2855	870	143.5	8.9
		15.00	130	0.315	2760	870	153.5	8.9
		16.00	130	0.335	2585	865	174.0	8.9
Steel 500 - 850 N/mm ²		12.50	100	0.265	2545	675	83.0	10.0
		13.00	100	0.275	2450	675	89.5	10.0
		13.50	100	0.285	2360	675	96.5	10.0
		14.00	100	0.295	2275	670	103.0	10.0
		14.50	100	0.305	2195	670	110.5	11.5
		15.00	100	0.315	2120	670	118.5	11.5
		16.00	100	0.335	1990	665	133.5	11.5
Steel 850 - 1100 N/mm ²		12.50	70	0.200	1785	355	43.5	19.1
		13.00	70	0.210	1715	360	48.0	18.8
		13.50	70	0.215	1650	355	51.0	19.0
		14.00	70	0.225	1590	360	55.5	18.7
		14.50	70	0.230	1535	355	58.5	21.8
		15.00	70	0.240	1485	355	62.5	21.7
		16.00	70	0.255	1395	355	71.5	21.6
Steel 1100 - 1300 N/mm ²		12.50	50	0.165	1275	210	26.0	32.3
		13.00	50	0.175	1225	215	28.5	31.4
		13.50	50	0.180	1180	210	30.0	32.1
		14.00	50	0.185	1135	210	32.5	32.0
		14.50	50	0.195	1100	215	35.5	36.0
		15.00	50	0.200	1060	210	37.0	36.7
		16.00	50	0.215	995	215	43.0	35.7

Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
Cold work tool steel (12% Cr) high alloyed [1.2379] Stainless steel [Cr-Ni/1.4301]	12.50	50	0.145	1275	185	22.5	36.6
	13.00	50	0.150	1225	185	24.5	36.5
	13.50	50	0.155	1180	185	26.5	36.4
	14.00	50	0.160	1135	180	27.5	37.4
	14.50	50	0.165	1100	180	29.5	43.0
	15.00	50	0.170	1060	180	32.0	42.9
	16.00	50	0.185	995	185	37.0	41.5
Cast iron (lamellar / spheroidal)	12.50	150	0.285	3820	1090	134.0	6.2
	13.00	150	0.295	3675	1085	144.0	6.2
	13.50	150	0.310	3535	1095	156.5	6.2
	14.00	150	0.320	3410	1090	168.0	6.2
	14.50	150	0.330	3295	1085	179.0	7.1
	15.00	150	0.345	3185	1100	194.5	7.0
	16.00	150	0.365	2985	1090	219.0	7.0
Wrought aluminium alloys Si < 6%	12.50	200	0.250	5095	1275	156.5	5.3
	13.00	200	0.260	4895	1275	169.0	5.3
	13.50	200	0.270	4715	1275	182.5	5.3
	14.00	200	0.280	4545	1275	196.5	5.3
	14.50	200	0.290	4390	1275	210.5	6.1
	15.00	200	0.300	4245	1275	225.5	6.1
	16.00	200	0.320	3980	1275	256.5	6.0



8xd



Rm < 850	Rm 850-1100	Rm 1100-1300					Inox Stainless		GG(G) Aluminium
--------------------	-----------------------	------------------------	--	--	--	--	--------------------------	--	---------------------------

[illegible]


15xd



Rm < 850	Rm 850-1100	Rm 1100-1300						GG(G) Aluminium
--------------------	-----------------------	------------------------	--	--	--	--	--	----------------------------------

[illegible]



20xd



Rm < 850	Rm 850-1100	Rm 1100-1300							GG(G) Aluminium
-------------	----------------	-----------------	--	--	--	--	--	--	--------------------

[illegible]


25xd




Rm < 850	Rm 850-1100	Rm 1100-1300						GG(G) Aluminium
--------------------	-----------------------	------------------------	--	--	--	--	--	----------------------------------

Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
	Steel < 500 N/mm ²	3.00	90	0.120	9550	1145	8.0	5.5
		4.00	90	0.120	7160	860	11.0	8.4
		5.00	90	0.120	5730	690	13.5	13.2
		6.00	90	0.150	4775	715	20.0	15.4
		7.00	90	0.150	4095	615	23.5	20.4
		8.00	90	0.150	3580	535	27.0	27.0
		9.00	90	0.200	3185	635	40.5	25.5
		10.00	90	0.200	2865	575	45.0	31.6
		12.00	90	0.200	2385	475	53.5	46.1
	Steel 500 - 850 N/mm ²	3.00	70	0.115	7425	855	6.0	7.4
		4.00	70	0.115	5570	640	8.0	11.3
		5.00	70	0.115	4455	510	10.0	17.8
		6.00	70	0.145	3715	540	15.5	20.3
		7.00	70	0.145	3185	460	17.5	27.3
		8.00	70	0.145	2785	405	20.5	35.7
		9.00	70	0.190	2475	470	30.0	34.4
		10.00	70	0.190	2230	425	33.5	42.8
		12.00	70	0.190	1855	350	39.5	62.6
	Steel 850 - 1100 N/mm ²	3.00	45	0.100	4775	480	3.5	13.2
		4.00	45	0.100	3580	360	4.5	20.0
		5.00	45	0.100	2865	285	5.5	31.9
		6.00	45	0.140	2385	335	9.5	32.8
		7.00	45	0.140	2045	285	11.0	44.1
		8.00	45	0.140	1790	250	12.5	57.8
		9.00	45	0.180	1590	285	18.0	56.7
		10.00	45	0.180	1430	255	20.0	71.3
		12.00	45	0.180	1195	215	24.5	101.9
	Steel 1100 - 1300 N/mm ²	3.00	30	0.090	3185	285	2.0	22.2
		4.00	30	0.090	2385	215	2.5	33.5
		5.00	30	0.090	1910	170	3.5	53.5
		6.00	30	0.125	1590	200	5.5	54.9
		7.00	30	0.125	1365	170	6.5	73.9
		8.00	30	0.125	1195	150	7.5	96.4
		9.00	30	0.160	1060	170	11.0	95.1
		10.00	30	0.160	955	155	12.0	117.3
		12.00	30	0.160	795	125	14.0	175.2
Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]	
Cold work tool steel (12% Cr) high alloyed [1.2379]	3.00	35	0.100	3715	370	2.5	17.1	
	4.00	35	0.100	2785	280	3.5	25.7	
	5.00	35	0.100	2230	225	4.5	40.4	
	6.00	35	0.140	1855	260	7.5	42.2	
	7.00	35	0.140	1590	225	8.5	55.9	
	8.00	35	0.140	1395	195	10.0	74.2	
	9.00	35	0.180	1240	225	14.5	71.9	
	10.00	35	0.180	1115	200	15.5	90.9	
	12.00	35	0.180	930	165	18.5	132.7	
Cast iron (lamellar / spheroidal)	3.00	70	0.160	7425	1190	8.5	5.3	
	4.00	70	0.160	5570	890	11.0	8.1	
	5.00	70	0.160	4455	715	14.0	12.7	
	6.00	70	0.210	3715	780	22.0	14.1	
	7.00	70	0.210	3185	670	26.0	18.8	
	8.00	70	0.210	2785	585	29.5	24.7	
	9.00	70	0.260	2475	645	41.0	25.1	
	10.00	70	0.260	2230	580	45.5	31.3	
	12.00	70	0.260	1855	480	54.5	45.6	
Wrought aluminium alloys Si < 6%	3.00	160	0.120	16975	2035	14.5	3.1	
	4.00	160	0.120	12730	1530	19.0	4.7	
	5.00	160	0.120	10185	1220	24.0	7.5	
	6.00	160	0.150	8490	1275	36.0	8.6	
	7.00	160	0.150	7275	1090	42.0	11.5	
	8.00	160	0.150	6365	955	48.0	15.1	
	9.00	160	0.200	5660	1130	72.0	14.3	
	10.00	160	0.200	5095	1020	80.0	17.8	
	12.00	160	0.200	4245	850	96.0	25.8	

30xd






Rm < 850	Rm 850-1100	Rm 1100-1300							GG(G) Aluminium
-------------	----------------	-----------------	--	--	--	--	--	--	--------------------

Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
	Steel < 500 N/mm ²	0.20	100	0.004	60000	240	0.0	0.3
		0.30	100	0.006	60000	360	0.0	0.3
		0.40	100	0.008	60000	480	0.0	0.3
		0.50	100	0.010	60000	600	0.0	0.3
		0.60	100	0.012	53050	635	0.0	0.3
		0.70	100	0.014	45475	635	0.0	0.3
		0.80	100	0.016	39790	635	0.5	0.4
		0.90	100	0.018	35370	635	0.5	0.4
		1.00	100	0.020	31830	635	0.5	0.5
		0.20	80	0.004	60000	240	0.0	0.3
	Steel 500 - 850 N/mm ²	0.30	80	0.007	60000	420	0.0	0.2
		0.40	80	0.009	60000	540	0.0	0.2
		0.50	80	0.011	50930	560	0.0	0.3
		0.60	80	0.013	42440	550	0.0	0.3
		0.70	80	0.016	36380	580	0.0	0.4
		0.80	80	0.018	31830	575	0.5	0.4
		0.90	80	0.020	28295	565	0.5	0.5
		1.00	80	0.022	25465	560	0.5	0.5
		0.20	40	0.003	60000	180	0.0	0.3
		0.30	40	0.005	42440	210	0.0	0.5
	Steel 850 - 1100 N/mm ²	0.40	40	0.006	31830	190	0.0	0.6
		0.50	40	0.008	25465	205	0.0	0.8
		0.60	40	0.009	21220	190	0.0	0.9
		0.70	40	0.011	18190	200	0.0	1.1
		0.80	40	0.012	15915	190	0.0	1.3
		0.90	40	0.014	14145	200	0.0	1.4
		1.00	40	0.015	12730	190	0.0	1.6
		0.20	50	0.004	60000	240	0.0	0.3
		0.30	50	0.005	53050	265	0.0	0.4
		0.40	50	0.007	39790	280	0.0	0.4
	Stainless steel [Cr-Ni/1.4301]	0.50	50	0.009	31830	285	0.0	0.5
		0.60	50	0.011	26525	290	0.0	0.6
		0.70	50	0.013	22735	295	0.0	0.7
		0.80	50	0.015	19895	300	0.0	0.8
		0.90	50	0.016	17685	285	0.0	1.0
		1.00	50	0.018	15915	285	0.0	1.1
		0.20	130	0.004	60000	240	0.0	0.3
		0.30	130	0.007	60000	420	0.0	0.2
		0.40	130	0.009	60000	540	0.0	0.2
		0.50	130	0.011	60000	660	0.0	0.2
	Cast iron (lamellar / spheroidal)	0.60	130	0.013	60000	780	0.0	0.2
		0.70	130	0.016	59115	945	0.5	0.2
		0.80	130	0.018	51725	930	0.5	0.3
		0.90	130	0.020	45980	920	0.5	0.3
		1.00	130	0.022	41380	910	0.5	0.3
	Wrought aluminium alloys Si < 6%	0.20	160	0.004	60000	240	0.0	0.3
		0.30	160	0.007	60000	420	0.0	0.2
		0.40	160	0.009	60000	540	0.0	0.2
		0.50	160	0.011	60000	660	0.0	0.2
		0.60	160	0.013	60000	780	0.0	0.2
		0.70	160	0.016	60000	960	0.5	0.2
		0.80	160	0.018	60000	1080	0.5	0.2
		0.90	160	0.020	56590	1130	0.5	0.2
		1.00	160	0.022	50930	1120	1.0	0.3

Micro drills Microdrill NX

5xd






Rm < 850	Rm 850-1100	Rm 1100-1300					Inox Stainless		GG(G) Aluminium
-------------	----------------	-----------------	--	--	--	--	-------------------	--	--------------------

Example: Order-N°.							DURO-SD	
Article-N°.							B57014	
ø-Code								
ø Code	d1 m7	d2 h5	l1	l2	L _{max}			
.0020	0.20	3	42	1.3	1.0		●	
.0025	0.25	3	42	1.6	1.2		●	
.0030	0.30	3	42	2.0	1.6		●	
.0035	0.35	3	42	2.3	1.8		●	
.0040	0.40	3	42	2.6	2.0		●	
.0045	0.45	3	42	2.9	2.2		●	
.0050	0.50	3	42	3.3	2.6		●	
.0055	0.55	3	42	3.6	2.8		●	
.0060	0.60	3	42	3.9	3.0		●	
.0065	0.65	3	42	4.2	3.2		●	
.0070	0.70	3	42	4.6	3.6		●	
.0075	0.75	3	42	4.9	3.8		●	
.0080	0.80	3	42	5.2	4.0		●	
.0085	0.85	3	42	5.5	4.2		●	
.0087	0.87	3	42	5.7	4.4		●	
.0090	0.90	3	42	5.9	4.6		●	
.0095	0.95	3	42	6.2	4.8		●	
.0100	1.00	3	42	6.5	5.0		●	
.0105	1.05	3	42	6.8	5.2		●	
.0107	1.07	3	42	7.0	5.4		●	

Micro drills Microdrill NX

5xd






Rm < 850	Rm 850-1100	Rm 1100-1300					Inox Stainless		GG(G) Aluminium
-------------	----------------	-----------------	--	--	--	--	-------------------	--	--------------------

Example: Order-N°.						Article-N°.		ø-Code				DURO-SD	
						B57014		.0110				B57014	
ø Code	d1 m7	d2 h5	l1	l2	L _{max}								
.0110	1.10	3	42	7.2	5.6							●	
.0115	1.15	3	42	7.5	5.8							●	
.0120	1.20	3	42	7.8	6.0							●	
.0125	1.25	3	42	8.1	6.2							●	
.0130	1.30	3	42	8.5	6.6							●	
.0135	1.35	3	42	8.8	6.8							●	
.0140	1.40	3	42	9.1	7.0							●	
.0142	1.42	3	42	9.2	7.1							●	
.0145	1.45	3	42	9.4	7.2							●	
.0150	1.50	3	42	9.8	7.6							●	
.0155	1.55	3	42	10.1	7.8							●	
.0160	1.60	3	42	10.4	8.0							●	
.0162	1.62	3	42	10.5	8.1							●	
.0165	1.65	3	42	10.7	8.2							●	
.0170	1.70	3	42	11.1	8.6							●	
.0175	1.75	3	42	11.4	8.8							●	
.0180	1.80	3	42	11.7	9.0							●	
.0185	1.85	3	50	12.0	9.2							●	
.0190	1.90	3	50	12.4	9.6							●	
.0195	1.95	3	50	12.7	9.8							●	

Micro drills Microdrill NX

5xd






Rm < 850	Rm 850-1100	Rm 1100-1300					Inox Stainless		GG(G) Aluminium
-------------	----------------	-----------------	--	--	--	--	-------------------	--	--------------------

Example: Order-N°.							DURO-SD	
Article-N°.							B57014	
ø-Code								
ø Code	d1 m7	d2 h5	l1	l2	L _{max}			
.0200	2.00	3	50	13.0	10.0		●	
.0205	2.05	3	50	13.3	10.2		●	
.0210	2.10	3	50	13.7	10.6		●	
.0215	2.15	3	50	14.0	10.8		●	
.0220	2.20	3	50	14.3	11.0		●	
.0225	2.25	3	50	14.6	11.2		●	
.0230	2.30	3	50	15.0	11.6		●	
.0235	2.35	3	50	15.3	11.8		●	
.0240	2.40	3	50	15.6	12.0		●	
.0245	2.45	3	50	15.9	12.2		●	
.0250	2.50	3	50	16.3	12.6		●	
.0255	2.55	3	50	16.6	12.8		●	
.0260	2.60	3	50	16.9	13.0		●	
.0265	2.65	3	50	17.2	13.2		●	
.0270	2.70	3	50	17.6	13.6		●	
.0275	2.75	3	50	17.9	13.8		●	
.0280	2.80	3	50	18.2	14.0		●	
.0285	2.85	3	50	18.5	14.2		●	
.0290	2.90	3	50	18.9	14.6		●	
.0295	2.95	3	50	19.2	14.8		●	

Micro drills Microdrill NX

5xd






Rm < 850	Rm 850-1100	Rm 1100-1300					Inox Stainless		GG(G) Aluminium
-------------	----------------	-----------------	--	--	--	--	-------------------	--	--------------------

Example: Order-N°.							DURO-SD	
Article-N°.							B57015	
ø-Code								
ø Code	d1 m7	d2 h5	l1	l2	L _{max}			
new! .0080	0.80	3	46	5.2	4.0		●	
new! .0085	0.85	3	46	5.5	4.2		●	
new! .0090	0.90	3	46	5.9	4.6		●	
new! .0095	0.95	3	46	6.2	4.8		●	
new! .0100	1.00	3	48	6.5	5.0		●	
new! .0105	1.05	3	48	6.8	5.2		●	
new! .0110	1.10	3	48	7.2	5.6		●	
new! .0115	1.15	3	48	7.5	5.8		●	
new! .0120	1.20	3	48	7.8	6.0		●	
new! .0125	1.25	3	48	8.1	6.2		●	
new! .0130	1.30	3	48	8.5	6.6		●	
new! .0135	1.35	3	48	8.8	6.8		●	
new! .0140	1.40	3	50	9.1	7.0		●	
new! .0145	1.45	3	50	9.4	7.2		●	
new! .0150	1.50	3	50	9.8	7.6		●	
new! .0155	1.55	3	50	10.1	7.8		●	
new! .0160	1.60	3	50	10.4	8.0		●	
new! .0165	1.65	3	50	10.7	8.2		●	
new! .0170	1.70	3	52	11.1	8.6		●	
new! .0175	1.75	3	52	11.4	8.8		●	
new! .0180	1.80	3	52	11.7	9.0		●	
new! .0185	1.85	3	52	12.0	9.2		●	

Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
	Steel < 500 N/mm ²	2.00	160	0.049	25465	1250	4.0	0.5
		2.10	160	0.051	24250	1235	4.5	0.5
		2.20	160	0.054	23150	1250	5.0	0.5
		2.35	160	0.059	21670	1280	5.5	0.6
		2.50	160	0.064	20370	1305	6.5	0.6
		2.60	160	0.067	19590	1315	7.0	0.6
		2.75	160	0.072	18520	1335	8.0	0.6
		2.85	160	0.075	17870	1340	8.5	0.6
		2.95	160	0.080	17265	1380	9.5	0.6
	Steel 500 - 850 N/mm ²	2.00	120	0.049	19100	935	3.0	0.6
		2.10	120	0.051	18190	930	3.0	0.7
		2.20	120	0.054	17360	935	3.5	0.7
		2.35	120	0.059	16255	960	4.0	0.7
		2.50	120	0.064	15280	980	5.0	0.8
		2.60	120	0.067	14690	985	5.0	0.8
		2.75	120	0.072	13890	1000	6.0	0.8
		2.85	120	0.075	13405	1005	6.5	0.8
		2.95	120	0.080	12950	1035	7.0	0.9
	Steel 850 - 1100 N/mm ²	2.00	100	0.049	15915	780	2.5	0.8
		2.10	100	0.051	15160	775	2.5	0.8
		2.20	100	0.054	14470	780	3.0	0.8
		2.35	100	0.059	13545	800	3.5	0.9
		2.50	100	0.064	12730	815	4.0	0.9
		2.60	100	0.067	12245	820	4.5	1.0
		2.75	100	0.072	11575	835	5.0	1.0
		2.85	100	0.075	11170	840	5.5	1.0
		2.95	100	0.080	10790	865	6.0	1.0
	Stainless steel [Cr-Ni-Mo/1.4571]	2.00	70	0.045	11140	500	1.5	1.2
		2.10	70	0.048	10610	510	2.0	1.2
		2.20	70	0.050	10130	505	2.0	1.3
		2.35	70	0.055	9480	520	2.5	1.4
		2.50	70	0.058	8915	515	2.5	1.5
		2.60	70	0.062	8570	530	3.0	1.5
		2.75	70	0.067	8100	545	3.0	1.5
		2.85	70	0.071	7820	555	3.5	1.5
		2.95	70	0.074	7555	560	4.0	1.6
	Cast iron (lamellar / spheroidal)	2.00	200	0.057	31830	1815	5.5	0.3
		2.10	200	0.060	30315	1820	6.5	0.3
		2.20	200	0.063	28935	1825	7.0	0.4
		2.35	200	0.069	27090	1870	8.0	0.4
		2.50	200	0.074	25465	1885	9.5	0.4
		2.60	200	0.079	24485	1935	10.5	0.4
		2.75	200	0.083	23150	1920	11.5	0.4
		2.85	200	0.086	22340	1920	12.0	0.4
		2.95	200	0.089	21580	1920	13.0	0.5
	Wrought aluminium alloys Si < 6%	2.00	250	0.057	39790	2270	7.0	0.3
		2.10	250	0.060	37895	2275	8.0	0.3
		2.20	250	0.063	36170	2280	8.5	0.3
		2.35	250	0.069	33865	2335	10.0	0.3
		2.50	250	0.074	31830	2355	11.5	0.3
		2.60	250	0.079	30605	2420	13.0	0.3
		2.75	250	0.083	28935	2400	14.5	0.3
		2.85	250	0.086	27920	2400	15.5	0.4
		2.95	250	0.089	26975	2400	16.5	0.4

Micro drills Microdrill NX

5xd






Rm < 850	Rm 850-1100	Rm 1100-1300					Inox Stainless		GG(G) Aluminium
-------------	----------------	-----------------	--	--	--	--	-------------------	--	--------------------

Example: Order-N°.							DURO-SD	
Article-N°.							B57015	
ø-Code								
ø Code	d1 m7	d2 h5	l1	l2	L _{max}			
new! .0190	1.90	3	52	12.4	9.6		●	
new! .0195	1.95	3	52	12.7	9.8		●	
.0200	2.00	3	56	13.0	10.0		●	
.0205	2.05	3	56	13.3	10.2		●	
.0210	2.10	3	56	13.7	10.6		●	
.0215	2.15	3	56	14.0	10.8		●	
.0220	2.20	3	56	14.3	11.0		●	
.0225	2.25	3	56	14.6	11.2		●	
.0230	2.30	3	56	15.0	11.6		●	
.0235	2.35	3	56	15.3	11.8		●	
.0240	2.40	3	56	15.6	12.0		●	
.0245	2.45	3	56	15.9	12.2		●	
.0250	2.50	3	56	16.3	12.6		●	
.0255	2.55	3	60	16.6	12.8		●	
.0260	2.60	3	60	16.9	13.0		●	
.0265	2.65	3	60	17.2	13.2		●	
.0270	2.70	3	60	17.6	13.6		●	
.0275	2.75	3	60	17.9	13.8		●	
.0280	2.80	3	60	18.2	14.0		●	
.0285	2.85	3	60	18.5	14.2		●	
.0290	2.90	3	60	18.9	14.6		●	
.0295	2.95	3	60	19.2	14.8		●	

Micro drills Microdrill NX

8xd






Rm < 850	Rm 850-1100	Rm 1100-1300					Inox Stainless		GG(G) Aluminium
-------------	----------------	-----------------	--	--	--	--	-------------------	--	--------------------

Example: Order-N°.							DURO-SD	
Article-N°.							B57020	
ø-Code								
ø Code	d1 m7	d2 h5	l1	l2	L _{max}			
new! .0080	0.80	3	46	7.6	6.4		●	
new! .0085	0.85	3	46	8.1	6.8		●	
new! .0090	0.90	3	46	8.5	7.2		●	
new! .0095	0.95	3	46	9.0	7.6		●	
new! .0100	1.00	3	48	9.5	8.0		●	
new! .0105	1.05	3	48	10.0	8.4		●	
new! .0110	1.10	3	48	10.4	8.8		●	
new! .0115	1.15	3	48	10.9	9.2		●	
new! .0120	1.20	3	48	11.4	9.6		●	
new! .0125	1.25	3	48	11.9	10.0		●	
new! .0130	1.30	3	48	12.3	10.4		●	
new! .0135	1.35	3	48	12.8	10.8		●	
new! .0140	1.40	3	50	13.3	11.2		●	
new! .0145	1.45	3	50	13.8	11.6		●	
new! .0150	1.50	3	50	14.2	12.0		●	
new! .0155	1.55	3	50	14.7	12.4		●	
new! .0160	1.60	3	50	15.2	12.8		●	
new! .0165	1.65	3	50	15.7	13.2		●	
new! .0170	1.70	3	52	16.1	13.6		●	
new! .0175	1.75	3	52	16.6	14.0		●	
new! .0180	1.80	3	52	17.1	14.4		●	
new! .0185	1.85	3	52	17.6	14.8		●	


Micro drills Microdrill NX

8xd



Rm < 850	Rm 850-1100	Rm 1100-1300					Inox Stainless		GG(G) Aluminium
-------------	----------------	-----------------	--	--	--	--	-------------------	--	--------------------


Example: Order-N°.							DURO-SD	
Article-N°.							B57020	
ø-Code								
ø Code	d1 m7	d2 h5	l1	l2	L _{max}			
new! .0190	1.90	3	52	18.0	15.2			●
new! .0195	1.95	3	52	18.5	15.6			●
.0200	2.00	3	56	19.0	16.0			●
.0205	2.05	3	56	19.5	16.4			●
.0210	2.10	3	56	20.0	16.9			●
.0215	2.15	3	56	20.4	17.2			●
.0220	2.20	3	56	20.9	17.6			●
.0225	2.25	3	56	21.4	18.0			●
.0230	2.30	3	56	21.9	18.5			●
.0235	2.35	3	56	22.3	18.8			●
.0240	2.40	3	56	22.8	19.2			●
.0245	2.45	3	56	23.3	19.6			●
.0250	2.50	3	56	23.8	20.1			●
.0255	2.55	3	60	24.2	20.4			●
.0260	2.60	3	60	24.7	20.8			●
.0265	2.65	3	60	25.2	21.2			●
.0270	2.70	3	60	25.7	21.7			●
.0275	2.75	3	60	26.1	22.0			●
.0280	2.80	3	60	26.6	22.4			●
.0285	2.85	3	60	27.1	22.8			●
.0290	2.90	3	60	27.6	23.3			●
.0295	2.95	3	60	28.0	23.6			●



Application	Material	d1 [mm]	for	v _c [m/min]	f [mm]	L _K [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]
Steel < 500 N/mm ²		2.50	M3	110	0.045	9.6	11670	525	3.5
		3.30	M4	110	0.055	12.5	8755	480	6.0
		4.20	M5	110	0.070	14.9	7005	490	9.5
		5.00	M6	110	0.085	18.1	5835	495	14.0
		6.80	M8	110	0.115	23.0	4375	505	25.5
		8.50	M10	110	0.145	28.0	3500	505	39.5
		10.20	M12	110	0.170	33.1	2920	495	56.0
		14.00	M16	110	0.230	42.4	2190	505	101.5
Steel 500 - 850 N/mm ²		2.50	M3	80	0.045	9.6	8490	380	2.5
		3.30	M4	80	0.055	12.5	6365	350	4.5
		4.20	M5	80	0.070	14.9	5095	355	7.0
		5.00	M6	80	0.085	18.1	4245	360	10.0
		6.80	M8	80	0.115	23.0	3185	365	18.5
		8.50	M10	80	0.145	28.0	2545	370	29.0
		10.20	M12	80	0.170	33.1	2120	360	40.5
		14.00	M16	80	0.230	42.4	1590	365	73.5
Steel 850 - 1100 N/mm ²		2.50	M3	55	0.040	9.6	5835	235	1.5
		3.30	M4	55	0.050	12.5	4375	220	3.0
		4.20	M5	55	0.065	14.9	3500	230	4.5
		5.00	M6	55	0.075	18.1	2920	220	6.0
		6.80	M8	55	0.100	23.0	2190	220	11.0
		8.50	M10	55	0.125	28.0	1750	220	17.5
		10.20	M12	55	0.150	33.1	1460	220	25.0
		14.00	M16	55	0.200	42.4	1095	220	44.0
Cast iron (lamellar / spheroidal)		2.50	M3	160	0.080	9.6	16975	1360	9.5
		3.30	M4	160	0.105	12.5	12730	1335	17.0
		4.20	M5	160	0.130	14.9	10185	1325	26.0
		5.00	M6	160	0.160	18.1	8490	1360	38.5
		6.80	M8	160	0.210	23.0	6365	1335	67.0
		8.50	M10	160	0.265	28.0	5095	1350	106.0
		10.20	M12	160	0.315	33.1	4245	1335	151.0
		14.00	M16	160	0.420	42.4	3185	1340	269.5



Material	d1 [mm]	for	v _c [m/min]	f [mm]	L _K [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]
Wrought aluminium alloys Si < 6%	2.50	M3	200	0.080	9.6	21220	1700	12.0
	3.30	M4	200	0.105	12.5	15915	1670	21.0
	4.20	M5	200	0.130	14.9	12730	1655	32.5
	5.00	M6	200	0.160	18.1	10610	1700	48.0
	6.80	M8	200	0.210	23.0	7960	1670	84.0
	8.50	M10	200	0.265	28.0	6365	1685	132.5
	10.20	M12	200	0.315	33.1	5305	1670	189.0
	14.00	M16	200	0.420	42.4	3980	1670	336.0

3xd, for core drill sizes for taps

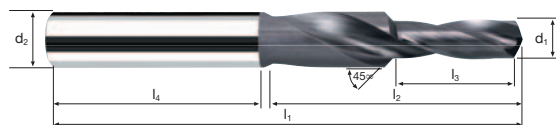[illegible]

Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
	Material CFC	3.00	100	0.050	10610	530	3.5	1.8
		4.00	100	0.060	7960	480	6.0	2.4
		4.83	100	0.080	6590	525	9.5	2.1
		5.00	100	0.090	6365	575	11.5	2.0
		6.00	100	0.095	5305	505	14.5	3.5
		6.35	100	0.100	5015	500	16.0	3.5

3xd



CFK



[illegible]

Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
	Material CFC/Ti	4.83	20	0.060	1320	80	1.5	25.7
		6.35	20	0.080	1005	80	2.5	30.8
	Material CFC/Al	4.83	40	0.060	2635	160	3.0	12.9
		6.35	40	0.080	2005	160	5.0	15.4

Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	T [sek]
	Material CFC	1.50	100	0.050	21220	1060	2.0	0.3
		2.00	100	0.060	15915	875	2.5	0.4

Micro drills Microdrill CFC

3xd

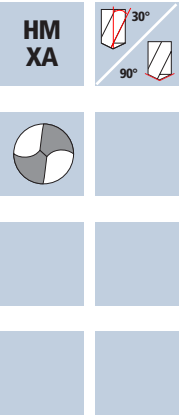


						DIAPLUS
Example: Order-N°.						B57710
Article-N°.						
ø-Code						
B57710 .0150						
ø Code	d1	d2 h5	l1	l2	Lmax	
.0150	1.50	3	40	6.8	4.6	•
.0200	2.00	3	40	9.0	6.0	•
Other versions available on request						

Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	
	Steel < 500 N/mm²	3	160	0.070	16975	1190	
		4	160	0.095	12730	1210	
		5	160	0.120	10185	1220	
		6	160	0.145	8490	1230	
		8	160	0.190	6365	1210	
		10	160	0.240	5095	1225	
		12	160	0.285	4245	1210	
		16	160	0.380	3185	1210	
	Steel 500 - 850 N/mm²	3	120	0.070	12730	890	
		4	120	0.095	9550	905	
		5	120	0.120	7640	915	
		6	120	0.145	6365	925	
		8	120	0.190	4775	905	
		10	120	0.240	3820	915	
		12	120	0.285	3185	910	
		16	120	0.380	2385	905	
	Steel 850 - 1100 N/mm²	3	90	0.030	9550	285	
		4	90	0.040	7160	285	
		5	90	0.050	5730	285	
		6	90	0.060	4775	285	
		8	90	0.080	3580	285	
		10	90	0.095	2865	270	
		12	90	0.115	2385	275	
		16	90	0.155	1790	275	
	Steel 1100 - 1300 N/mm²	3	60	0.025	6365	160	
		4	60	0.035	4775	165	
		5	60	0.040	3820	155	
		6	60	0.050	3185	160	
		8	60	0.065	2385	155	
		10	60	0.080	1910	155	
		12	60	0.095	1590	150	
		16	60	0.130	1195	155	
Material		d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	
Steel 1300 - 1500 N/mm²	3	30	0.025	3185	80		
	4	30	0.035	2385	85		
	5	30	0.040	1910	75		
	6	30	0.050	1590	80		
	8	30	0.065	1195	80		
	10	30	0.080	955	75		
	12	30	0.095	795	75		
	16	30	0.130	595	75		
Cold work tool steel (12% Cr) high alloyed [1.2379] Stainless steel [Cr-Ni/1.4301]	3	40	0.015	4245	65		
	4	40	0.020	3185	65		
	5	40	0.025	2545	65		
	6	40	0.030	2120	65		
	8	40	0.040	1590	65		
	10	40	0.045	1275	55		
	12	40	0.060	1060	65		
	16	40	0.075	795	60		
Cast iron (lamellar / spheroidal)	3	180	0.075	19100	1435		
	4	180	0.105	14325	1505		
	5	180	0.130	11460	1490		
	6	180	0.160	9550	1530		
	8	180	0.210	7160	1505		
	10	180	0.265	5730	1520		
	12	180	0.315	4775	1505		
	16	180	0.420	3580	1505		
Wrought aluminium alloys Si < 6%	3	220	0.075	23345	1750		
	4	220	0.105	17505	1840		
	5	220	0.130	14005	1820		
	6	220	0.160	11670	1865		
	8	220	0.210	8755	1840		
	10	220	0.265	7005	1855		
	12	220	0.315	5835	1840		
	16	220	0.420	4375	1840		

90°

Technical drawing of a drill bit. The drawing shows a cylindrical body with diameter d_2 and a total length l_1 . The cutting edge has a diameter d_1 and a 90° point angle.

GG(G)
Aluminium[illegible]



Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	
Steel < 500 N/mm ²		3	160	0.070	16975	1190	
		4	160	0.095	12730	1210	
		5	160	0.120	10185	1220	
		6	160	0.145	8490	1230	
		8	160	0.190	6365	1210	
		10	160	0.240	5095	1225	
		12	160	0.285	4245	1210	
		16	160	0.380	3185	1210	
Steel 500 - 850 N/mm ²		3	120	0.070	12730	890	
		4	120	0.095	9550	905	
		5	120	0.120	7640	915	
		6	120	0.145	6365	925	
		8	120	0.190	4775	905	
		10	120	0.240	3820	915	
		12	120	0.285	3185	910	
		16	120	0.380	2385	905	
Steel 850 - 1100 N/mm ²		3	90	0.060	9550	575	
		4	90	0.075	7160	535	
		5	90	0.095	5730	545	
		6	90	0.115	4775	550	
		8	90	0.155	3580	555	
		10	90	0.190	2865	545	
		12	90	0.230	2385	550	
		16	90	0.310	1790	555	
Steel 1100 - 1300 N/mm ²		3	60	0.050	6365	320	
		4	60	0.065	4775	310	
		5	60	0.080	3820	305	
		6	60	0.095	3185	305	
		8	60	0.125	2385	300	
		10	60	0.160	1910	305	
		12	60	0.190	1590	300	
		16	60	0.255	1195	305	

Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	
Steel 1300 - 1500 N/mm ²	3	30	0.050	3185	160	
	4	30	0.065	2385	155	
	5	30	0.080	1910	155	
	6	30	0.095	1590	150	
	8	30	0.125	1195	150	
	10	30	0.160	955	155	
	12	30	0.190	795	150	
	16	30	0.255	595	150	
Cold work tool steel (12% Cr) high alloyed [1.2379] Stainless steel [Cr-Ni/1.4301]	3	60	0.040	6365	255	
	4	60	0.055	4775	265	
	5	60	0.070	3820	265	
	6	60	0.080	3185	255	
	8	60	0.110	2385	260	
	10	60	0.135	1910	260	
	12	60	0.165	1590	260	
	16	60	0.220	1195	265	
Cast iron (lamellar / spheroidal)	3	180	0.080	19100	1530	
	4	180	0.105	14325	1505	
	5	180	0.130	11460	1490	
	6	180	0.160	9550	1530	
	8	180	0.210	7160	1505	
	10	180	0.265	5730	1520	
	12	180	0.315	4775	1505	
	16	180	0.420	3580	1505	
Wrought aluminium alloys Si < 6%	3	220	0.080	23345	1870	
	4	220	0.105	17505	1840	
	5	220	0.130	14005	1820	
	6	220	0.160	11670	1865	
	8	220	0.210	8755	1840	
	10	220	0.265	7005	1855	
	12	220	0.315	5835	1840	
	16	220	0.420	4375	1840	

Application	Material	d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	
	Steel < 500 N/mm²	3	160	0.070	16975	1190	
		4	160	0.095	12730	1210	
		5	160	0.120	10185	1220	
		6	160	0.145	8490	1230	
		8	160	0.190	6365	1210	
		10	160	0.240	5095	1225	
		12	160	0.285	4245	1210	
		16	160	0.380	3185	1210	
	Steel 500 - 850 N/mm²	3	120	0.070	12730	890	
		4	120	0.095	9550	905	
		5	120	0.120	7640	915	
		6	120	0.145	6365	925	
		8	120	0.190	4775	905	
		10	120	0.240	3820	915	
		12	120	0.285	3185	910	
		16	120	0.380	2385	905	
	Steel 850 - 1100 N/mm²	3	90	0.060	9550	575	
		4	90	0.075	7160	535	
		5	90	0.095	5730	545	
		6	90	0.115	4775	550	
		8	90	0.155	3580	555	
		10	90	0.190	2865	545	
		12	90	0.230	2385	550	
		16	90	0.310	1790	555	
	Steel 1100 - 1300 N/mm²	3	60	0.050	6365	320	
		4	60	0.065	4775	310	
		5	60	0.080	3820	305	
		6	60	0.095	3185	305	
		8	60	0.125	2385	300	
		10	60	0.160	1910	305	
		12	60	0.190	1590	300	
		16	60	0.255	1195	305	
Material		d1 [mm]	v _c [m/min]	f [mm]	n [min ⁻¹]	v _f [mm/min]	
Steel 1300 - 1500 N/mm²	3	30	0.050	3185	160		
	4	30	0.065	2385	155		
	5	30	0.080	1910	155		
	6	30	0.095	1590	150		
	8	30	0.125	1195	150		
	10	30	0.160	955	155		
	12	30	0.190	795	150		
	16	30	0.255	595	150		
Cold work tool steel (12% Cr) high alloyed [1.2379] Stainless steel [Cr-Ni/1.4301]	3	60	0.040	6365	255		
	4	60	0.055	4775	265		
	5	60	0.070	3820	265		
	6	60	0.080	3185	255		
	8	60	0.110	2385	260		
	10	60	0.135	1910	260		
	12	60	0.165	1590	260		
	16	60	0.220	1195	265		
Cast iron (lamellar / spheroidal)	3	180	0.080	19100	1530		
	4	180	0.105	14325	1505		
	5	180	0.130	11460	1490		
	6	180	0.160	9550	1530		
	8	180	0.210	7160	1505		
	10	180	0.265	5730	1520		
	12	180	0.315	4775	1505		
	16	180	0.420	3580	1505		
Wrought aluminium alloys Si < 6%	3	220	0.080	23345	1870		
	4	220	0.105	17505	1840		
	5	220	0.130	14005	1820		
	6	220	0.160	11670	1865		
	8	220	0.210	8755	1840		
	10	220	0.265	7005	1855		
	12	220	0.315	5835	1840		
	16	220	0.420	4375	1840		

90°


GG(G)
Aluminium

www.fraisa.com

Countersinks

90°

HSS	



Rm < 850	Rm 850-1100						Inox Stainless		GG(G) Aluminium
-------------	----------------	--	--	--	--	--	-------------------	--	--------------------

Example: Order-N°.						Article-N°.		ø-Code				U-4XD	
						B92310		.0530				B92300	B92310
ø Code	d1 z9	d2 h9	d3	l1	z								
.0530	5.3	4	1.5	40	3							●	●
.0580	5.8	5	1.5	45	3							●	●
.0630	6.3	5	1.5	45	3							●	●
.0730	7.3	6	1.8	50	3							●	●
.0830	8.3	6	2.0	50	3							●	●
.0940	9.4	6	2.2	50	3							●	●
.1040	10.4	6	2.5	50	3							●	●
.1150	11.5	8	2.8	56	3							●	●
.1240	12.4	8	2.8	56	3							●	●
.1340	13.4	8	2.9	56	3							●	●
.1500	15.0	10	3.2	60	3							●	●
.1650	16.5	10	3.2	60	3							●	●
.1900	19.0	10	3.5	63	3							●	●
.2050	20.5	10	3.5	63	3							●	●
.2500	25.0	10	3.8	67	3							●	●
.3100	31.0	12	4.2	71	3							●	●
.9999	Assortment of rose countersinks containing:											●	●
	1 pce. ø 6.3 / 8.3 / 10.4 / 12.4 / 16.5 / 20.5												



Metric coarse thread M

Tolerance ISO 2 (6H)

N° EH0100 / EH0101



N° EH10310 / EH10311 s-tap



N° EH0502 / EH0503 x-tap



N° EH0570 / EH0571 x-tap



N° EH0580 / EH0581 x-tap



N° EH0590 x-tap-R



N° EH0591 x-tap-R



N° EH0512 / EH0513



N° EH0595 / EH0596 h-tap



N° EH6900 / EH6901 durotap H



N° ET0400 / ET0401 Inotap



N° ET0570 / ET0571 x-tap



N° ET0580 / ET0581 x-tap



N° ET0590 x-tap-R



N° ET0591 x-tap-R



N° EH0600 / EH0601 c-tap



	HSS PM/F		Rm <850		143
	HSS-E Co5		Rm <850		145
	HSS PM/F		Rm 850-1100		147
	HSS PM/F		Rm 850-1100		149
	HSS PM/F		Rm 850-1100		153
	HSS PM/F		Rm 850-1100		155
	HSS PM/F		Rm 850-1100		157
	HSS PM/F		Rm 1100-1500		159
	HSS PM/F		Rm 1100-1500		161
	HM MG10		HRC 48- >60		163
	HSS PM/F		Inox Stainless		165
	HSS PM/F		Inox Stainless		167
	HSS PM/F		Inox Stainless		169
	HSS PM/F		Inox Stainless		171
	HSS PM/F		Inox Stainless		173
	HSS PM/F		GG(G) Cast iron		175

M

Metric coarse thread M

Tolerance ISO 2 (6H)

N° EH0620 / EH0621	c-tap	
N° EH6500	durotap GG-R	
N° EH6501	durotap GG-R	
N° EH6550 / EH6551	durotap GG	
N° EI0020 / EI0021		
N° EI0050 / EI0051		
N° EH6300	durotap A-R	
N° EH6301	durotap A-R	
N° EH6350 / EH6351	durotap A	
N° ET0705 / ET0706	titap	
N° ET0755 / ET0756	titap	
N° E0598	n-tap	
N° EH0109	polytap-R	
N° EH0110	polytap-R	
N° EH0229	polytap-R	
N° EH0230	polytap-R	

	HSS PM/F		GG(G) Cast iron		177
	HM MG10		GG(G) Cast iron		179
	HM MG10		GG(G) Cast iron		181
	HM MG10		GG(G) Cast iron		183
	HSS PM/F		Al Aluminium Alloy	Cu Copper	185
	HSS PM/F		Al Aluminium Alloy	Cu Copper	187
	HM MG10		Al Aluminium Cast		189
	HM MG10		Al Aluminium Cast		191
	HM MG10		Al Aluminium Cast		193
	HSS PM/F		Ti Titanium		195
	HSS PM/F		Ti Titanium		199
	HSS PM/F		Ni Nickel Alloy		201
	HSS PM/F		Rm <850-1100	Inox Stainless	203
	HSS PM/F		Rm <850-1100	Inox Stainless	205
	HSS PM/F		Rm <850-1100	Inox Stainless	207
	HSS PM/F		Rm <850-1100	Inox Stainless	209

Metric coarse thread M

Tolerance ISO 2 (6H)

N° E10800 / E10801 u-tap



HSS-E
Co5



Rm
<850

211

N° E10820 / E10821 u-tap



HSS-E
Co5



Rm
<850

215

N° E10340 extra lang



HSS
PM/F



Rm
<850

219

N° E10350 extra lang



HSS
PM/F



Rm
<850

221

M

Tolerance ISO 2 (6H) LH

N° E10122 / E10123



HSS-E
Co5



Rm
<850

223

N° E10222 / E10223



HSS-E
Co5



Rm
<850

225

Tolerance ISO 2 +0.1

N° E10118 / E10119



HSS-E
Co5



Rm
<850

227

N° E10220 / E10221



HSS-E
Co5



Rm
<850

229

Tolerance ISO 3 (6G)

N° EH0504 / EH0505 x-tap



HSS
PM/F



Rm
850-1100

231

N° EH0572 / EH0573 x-tap



HSS
PM/F



Rm
850-1100

233

Tolerance ISO 1 (4H)

N° E10110



HSS-E
Co5



Rm
<850

235

N° E10214



HSS-E
Co5




Rm
<850

237



Metric coarse thread M / MJ


Tolerance 7G

N° E10114 / E10115			HSS-E Co5		Rm <850		239
N° E10218 / E10219			HSS-E Co5		Rm <850		241

MJ Tolerance 4H

N° E0599			HSS PM/F		Ni Nickel Alloy		243
----------	--	---	-------------	---	-----------------------	--	-----

M

Application	Material	M	ø [mm]	P [mm]	V _c 1.5 x d [min ⁻¹]	n [100%]	V _c 2.0 x d [min ⁻¹]	n [100%]	V _f [100%]	V _c 3.0 x d [min ⁻¹]	n [100%]	V _f [100%]	
	Steel < 500 N/mm ²	M 2	2.0	0.40	28	4455	1782	23	3660	1464	18	2865	1146
		M 2.5	2.5	0.45	28	3565	1604	23	2930	1319	18	2290	1031
		M 3	3.0	0.50	28	2970	1485	23	2440	1220	18	1910	955
		M 4	4.0	0.70	28	2230	1561	23	1830	1281	18	1430	1001
		M 5	5.0	0.80	28	1785	1428	23	1465	1172	18	1145	916
		M 6	6.0	1.00	28	1485	1485	23	1220	1220	18	955	955
		M 8	8.0	1.25	28	1115	1394	23	915	1144	18	715	894
		M10	10.0	1.50	28	890	1335	23	730	1095	18	575	863
		M12	12.0	1.75	28	745	1304	23	610	1068	18	475	831
Steel < 500 N/mm ²	M14	14.0	2.00	28	635	1270	23	525	1050	18	410	820	
	M16	16.0	2.00	28	555	1110	23	460	920	18	360	720	
	M18	18.0	2.50	28	495	1238	23	405	1013	18	320	800	
	M20	20.0	2.50	28	445	1113	23	365	913	18	285	713	
	M22	22.0	2.50	28	405	1013	23	335	838	18	260	650	
	M24	24.0	3.00	28	370	1110	23	305	915	18	240	720	
Steel 500 - 850 N/mm ²	M 2	2.0	0.40	25	3980	1592	20	3185	1274	15	2385	954	
	M 2.5	2.5	0.45	25	3185	1433	20	2545	1145	15	1910	860	
	M 3	3.0	0.50	25	2655	1328	20	2120	1060	15	1590	795	
	M 4	4.0	0.70	25	1990	1393	20	1590	1113	15	1195	837	
	M 5	5.0	0.80	25	1590	1272	20	1275	1020	15	955	764	
	M 6	6.0	1.00	25	1325	1325	20	1060	1060	15	795	795	
	M 8	8.0	1.25	25	995	1244	20	795	994	15	595	744	
	M10	10.0	1.50	25	795	1193	20	635	953	15	475	713	
	M12	12.0	1.75	25	665	1164	20	530	928	15	400	700	
Steel 500 - 850 N/mm ²	M14	14.0	2.00	25	570	1140	20	455	910	15	340	680	
	M16	16.0	2.00	25	495	990	20	400	800	15	300	600	
	M18	18.0	2.50	25	440	1100	20	355	888	15	265	663	
	M20	20.0	2.50	25	400	1000	20	320	800	15	240	600	
	M22	22.0	2.50	25	360	900	20	290	725	15	215	538	
	M24	24.0	3.00	25	330	990	20	265	795	15	200	600	




M

ISO 2
(6H)

HSS
PM/F

DIN
371/376

Form B

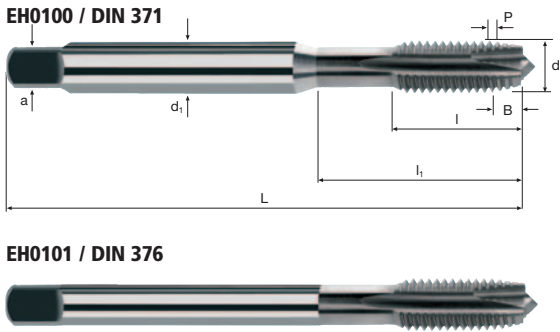


M

Rm < 850	Rm 850-1100									
-------------	----------------	--	--	--	--	--	--	--	--	--

Example: Order-Nº. Article-Nº. ø-Code EH0100 .034										TiCN
Ø Code	d	P	L	l	l1	d1	a			EH0100
.034	M 2	0.40	45	8	—	2.8	2.1	2	1.60	●
.040	M 2.5	0.45	50	9	—	2.8	2.1	2	2.05	●
.044	M 3	0.50	56	12	18.0	3.5	2.7	3	2.50	●
.058	M 4	0.70	63	13	21.0	4.5	3.4	3	3.30	●
.084	M 5	0.80	70	15	25.0	6.0	4.9	3	4.20	●
.088	M 6	1.00	80	17	30.0	6.0	4.9	3	5.00	●
.160	M 8	1.25	90	20	35.0	8.0	6.2	3	6.80	●
.174	M10	1.50	100	22	39.0	10.0	8.0	3	8.50	●

Example: Order-Nº. Article-Nº. ø-Code EH0101 .240										TiCN
Ø Code	d	P	L	l	l1	d1	a			EH0101
.240	M12	1.75	110	24	40.0	9.0	7.0	3	10.20	●
.244	M14	2.00	110	26	40.0	11.0	9.0	3	12.00	●
.246	M16	2.00	110	27	40.0	12.0	9.0	3	14.00	●
.312	M18	2.50	125	30	45.0	14.0	11.0	4	15.50	●
.314	M20	2.50	140	32	50.0	16.0	12.0	4	17.50	●
.316	M22	2.50	140	32	50.0	18.0	14.5	4	19.50	●
.320	M24	3.00	160	34	60.0	18.0	14.5	4	21.00	●

Application	Material	M	ø [mm]	P [mm]	V _c 1.0 x d	n [min ⁻¹]	v _f [100%]	V _c 1.5 x d	n [min ⁻¹]	v _f [100%]	V _c 2.0 x d	n [min ⁻¹]	v _f [100%]
	Steel < 500 N/mm ²	M 2	2.0	0.40	25	3980	1592	20	3185	1274	18	2865	1146
		M 2.5	2.5	0.45	25	3185	1433	20	2545	1145	18	2290	1031
		M 3	3.0	0.50	25	2655	1328	20	2120	1060	18	1910	955
		M 4	4.0	0.70	25	1990	1393	20	1590	1113	18	1430	1001
		M 5	5.0	0.80	25	1590	1272	20	1275	1020	18	1145	916
		M 6	6.0	1.00	25	1325	1325	20	1060	1060	18	955	955
		M 8	8.0	1.25	25	995	1244	20	795	994	18	715	894
		M10	10.0	1.50	25	795	1193	20	635	953	18	575	863
		M12	12.0	1.75	25	665	1164	20	530	928	18	475	831
		M14	14.0	2.00	25	570	1140	20	455	910	18	410	820
		M16	16.0	2.00	25	495	990	20	400	800	18	360	720
		M18	18.0	2.50	25	440	1100	20	355	888	18	320	800
	Steel < 500 N/mm ²	M20	20.0	2.50	25	400	1000	20	320	800	18	285	713
		M22	22.0	2.50	25	360	900	20	290	725	18	260	650
		M24	24.0	3.00	25	330	990	20	265	795	18	240	720
	Steel 500 - 850 N/mm ²	M 2	2.0	0.40	16	2545	1018	14	2230	892	12	1910	764
		M 2.5	2.5	0.45	16	2035	916	14	1785	803	12	1530	689
		M 3	3.0	0.50	16	1700	850	14	1485	743	12	1275	638
		M 4	4.0	0.70	16	1275	893	14	1115	781	12	955	669
		M 5	5.0	0.80	16	1020	816	14	890	712	12	765	612
		M 6	6.0	1.00	16	850	850	14	745	745	12	635	635
		M 8	8.0	1.25	16	635	794	14	555	694	12	475	594
		M10	10.0	1.50	16	510	765	14	445	668	12	380	570
		M12	12.0	1.75	16	425	744	14	370	648	12	320	560
		M14	14.0	2.00	16	365	730	14	320	640	12	275	550
		M16	16.0	2.00	16	320	640	14	280	560	12	240	480
		M18	18.0	2.50	16	285	713	14	250	625	12	210	525
	Steel 500 - 850 N/mm ²	M20	20.0	2.50	16	255	638	14	225	563	12	190	475
		M22	22.0	2.50	16	230	575	14	205	513	12	175	438
		M24	24.0	3.00	16	210	630	14	185	555	12	160	480

Taps s-tap




M

ISO 2
(6H)

HSS-E
Co5

Form C

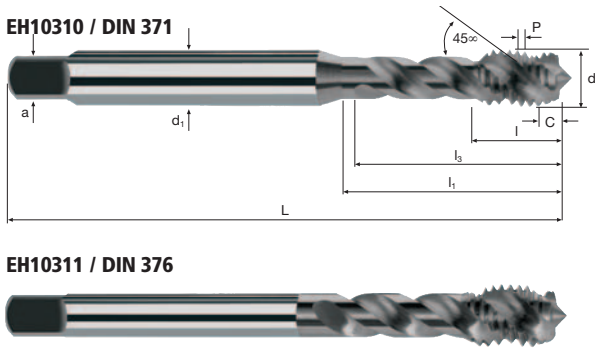

M

Rm < 850	Rm 850-1100										
-------------	----------------	--	--	--	--	--	--	--	--	--	--

Example: Order-N°.											TiCN
Article-N°.											EH10310
ø-Code											
ø Code	d	P	L	l	l1	l3	d1	a			
.034	M 2	0.40	45	8.0	—	10.5	2.8	2.1	3	1.60	●
.040	M 2.5	0.45	50	9.0	—	13.0	2.8	2.1	3	2.05	●
.044	M 3	0.50	56	4.0	18.0	16.0	3.5	2.7	3	2.50	●
.058	M 4	0.70	63	5.6	21.0	19.0	4.5	3.4	3	3.30	●
.084	M 5	0.80	70	6.4	25.0	23.0	6.0	4.9	3	4.20	●
.088	M 6	1.00	80	8.0	30.0	28.0	6.0	4.9	3	5.00	●
.160	M 8	1.25	90	10.0	35.0	33.0	8.0	6.2	3	6.80	●
.174	M10	1.50	100	12.0	39.0	37.0	10.0	8.0	3	8.50	●

Example: Order-N°.											TiCN
Article-N°.											EH10311
ø-Code											
ø Code	d	P	L	l	l1	l3	d1	a			
.240	M12	1.75	110	14.0	50.0	48.0	9.0	7.0	3	10.20	●
.244	M14	2.00	110	16.0	58.0	56.0	11.0	9.0	4	12.00	●
.246	M16	2.00	110	16.0	58.0	56.0	12.0	9.0	4	14.00	●
.312	M18	2.50	125	20.0	65.0	63.0	14.0	11.0	4	15.50	●
.314	M20	2.50	140	20.0	72.0	70.0	16.0	12.0	4	17.50	●
.316	M22	2.50	140	20.0	72.0	70.0	18.0	14.5	4	19.50	●
.320	M24	3.00	160	24.0	74.0	72.0	18.0	14.5	4	21.00	●


M

ISO 2
(6H)

HSS
PM/F

DIN
371/376

Form B

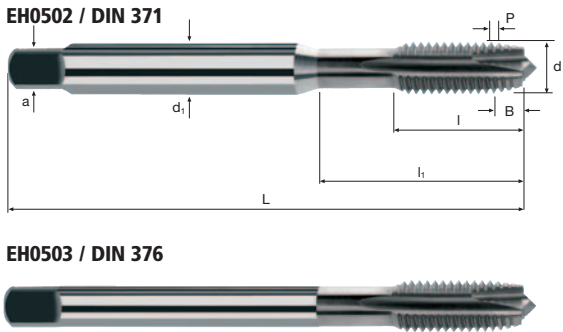


Rm < 850	Rm 850-1100	Rm 1100-1300								
-------------	----------------	-----------------	--	--	--	--	--	--	--	--

Example: Order-Nº. Article-Nº. EH0502 ø-Code .034										TiCN
										EH0502
Ø Code	d	P	L	I	l ₁	d ₁	a			
.034	M 2	0.40	45	8	—	2.8	2.1	2	1.60	●
.040	M 2.5	0.45	50	9	—	2.8	2.1	2	2.05	●
.044	M 3	0.50	56	12	18.0	3.5	2.7	3	2.50	●
.058	M 4	0.70	63	13	21.0	4.5	3.4	3	3.30	●
.084	M 5	0.80	70	15	25.0	6.0	4.9	3	4.20	●
.088	M 6	1.00	80	17	30.0	6.0	4.9	3	5.00	●
.160	M 8	1.25	90	20	35.0	8.0	6.2	3	6.80	●
.174	M10	1.50	100	22	39.0	10.0	8.0	3	8.50	●

Example: Order-Nº. Article-Nº. EH0503 ø-Code .240										TiCN
										EH0503
Ø Code	d	P	L	I	l ₁	d ₁	a			
.240	M12	1.75	110	24	40.0	9.0	7.0	3	10.20	●
.244	M14	2.00	110	26	40.0	11.0	9.0	3	12.00	●
.246	M16	2.00	110	27	40.0	12.0	9.0	3	14.00	●
.312	M18	2.50	125	30	45.0	14.0	11.0	4	15.50	●
.314	M20	2.50	140	32	50.0	16.0	12.0	4	17.50	●
.316	M22	2.50	140	32	50.0	18.0	14.5	4	19.50	●
.320	M24	3.00	160	34	60.0	18.0	14.5	4	21.00	●

Application



Material

Steel
500 - 850 N/mm²

Steel
850 - 1100 N/mm²

M


ISO 2
(6H)



**HSS
PM/F**

DIN
371

Form C

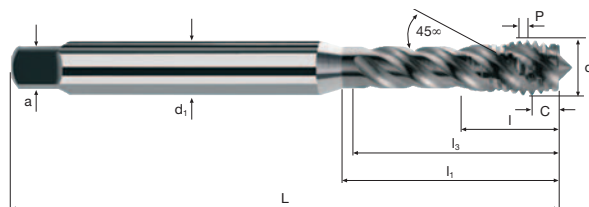

M


Rm


< 850

Rm

850-1100

[illegible]

Application	Material	M	ø [mm]	P [mm]	V _c 1.0 x d [min ⁻¹]	n _f [100%]	V _c 1.5 x d [min ⁻¹]	n _f [100%]	V _c 2.0 x d [min ⁻¹]	n _f [100%]
	Steel 500 - 850 N/mm ²	M12	12.0	1.75	32	850	1488	28	745	1304
		M14	14.0	2.00	32	730	1460	28	635	1270
		M16	16.0	2.00	32	635	1270	28	555	1110
		M18	18.0	2.50	32	565	1413	28	495	1238
		M20	20.0	2.50	32	510	1275	28	445	1113
		M22	22.0	2.50	32	465	1163	28	405	1013
		M24	24.0	3.00	32	425	1275	28	370	1110
		M27	27.0	3.00	32	375	1125	28	330	990
		M30	30.0	3.50	32	340	1190	28	295	1033
Steel 500 - 850 N/mm ²	M33	33.0	3.50	32	310	1085	28	270	945	22
	M36	36.0	4.00	32	285	1140	28	250	1000	22
	M39	39.0	4.00	32	260	1040	28	230	920	22
	M42	42.0	4.50	32	245	1103	28	210	945	22
Steel 850 - 1100 N/mm ²	M12	12.0	1.75	20	530	928	16	425	744	10
	M14	14.0	2.00	20	455	910	16	365	730	10
	M16	16.0	2.00	20	400	800	16	320	640	10
	M18	18.0	2.50	20	355	888	16	285	713	10
	M20	20.0	2.50	20	320	800	16	255	638	10
	M22	22.0	2.50	20	290	725	16	230	575	10
	M24	24.0	3.00	20	265	795	16	210	630	10
	M27	27.0	3.00	20	235	705	16	190	570	10
	M30	30.0	3.50	20	210	735	16	170	595	10
Steel 850 - 1100 N/mm ²	M33	33.0	3.50	20	195	683	16	155	543	10
	M36	36.0	4.00	20	175	700	16	140	560	10
	M39	39.0	4.00	20	165	660	16	130	520	10
	M42	42.0	4.50	20	150	675	16	120	540	10

Application	Material	M	ø [mm]	P [mm]	V _c 1.0 x d [min ⁻¹]	n [100%]	V _c 1.5 x d [min ⁻¹]	n [100%]	V _f [100%]	V _c 2.0 x d [min ⁻¹]	n [100%]	V _f [100%]	
	Steel 500 - 850 N/mm ²	M 4	4.0	0.70	32	2545	1782	28	2230	1561	22	1750	1225
		M 5	5.0	0.80	32	2035	1628	28	1785	1428	22	1400	1120
		M 6	6.0	1.00	32	1700	1700	28	1485	1485	22	1165	1165
		M 8	8.0	1.25	32	1275	1594	28	1115	1394	22	875	1094
		M10	10.0	1.50	32	1020	1530	28	890	1335	22	700	1050
		M12	12.0	1.75	32	850	1488	28	745	1304	22	585	1024
		M14	14.0	2.00	32	730	1460	28	635	1270	22	500	1000
		M16	16.0	2.00	32	635	1270	28	555	1110	22	440	880
		M18	18.0	2.50	32	565	1413	28	495	1238	22	390	975
	Steel 500 - 850 N/mm ²	M20	20.0	2.50	32	510	1275	28	445	1113	22	350	875
		M22	22.0	2.50	32	465	1163	28	405	1013	22	320	800
		M24	24.0	3.00	32	425	1275	28	370	1110	22	290	870
	Steel 850 - 1100 N/mm ²	M 4	4.0	0.70	20	1590	1113	16	1275	893	10	795	557
		M 5	5.0	0.80	20	1275	1020	16	1020	816	10	635	508
		M 6	6.0	1.00	20	1060	1060	16	850	850	10	530	530
		M 8	8.0	1.25	20	795	994	16	635	794	10	400	500
		M10	10.0	1.50	20	635	953	16	510	765	10	320	480
		M12	12.0	1.75	20	530	928	16	425	744	10	265	464
		M14	14.0	2.00	20	455	910	16	365	730	10	225	450
		M16	16.0	2.00	20	400	800	16	320	640	10	200	400
		M18	18.0	2.50	20	355	888	16	285	713	10	175	438
	Steel 850 - 1100 N/mm ²	M20	20.0	2.50	20	320	800	16	255	638	10	160	400
		M22	22.0	2.50	20	290	725	16	230	575	10	145	363
		M24	24.0	3.00	20	265	795	16	210	630	10	135	405

Taps x-tap

Incool




M

ISO 2
(6H)

HSS
PM/F

X - P
Form C

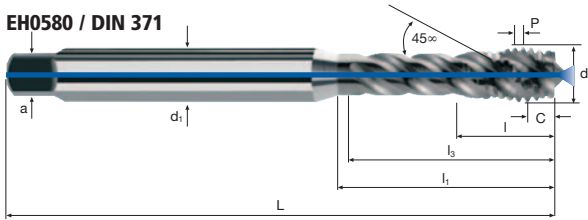

EH0581 / DIN 376



Rm < 850	Rm 850-1100										
-------------	----------------	--	--	--	--	--	--	--	--	--	--

Example: Order-N°.											TiCN
Article-N°.											EH0580
ø-Code											
ø	d	P	L	l	l1	l3	d1	a			
.058	M 4	0.70	63	7	—	19	4.5	3.4	3	3.30	●
.084	M 5	0.80	70	8	—	23	6.0	4.9	3	4.20	●
.088	M 6	1.00	80	10	—	28	6.0	4.9	3	5.00	●
.160	M 8	1.25	90	13	35	33	8.0	6.2	3	6.80	●
.174	M10	1.50	100	15	39	37	10.0	8.0	4	8.50	●

Example: Order-N°.											TiCN
Article-N°.											EH0581
ø-Code											
ø	d	P	L	l	l1	l3	d1	a			
.240	M12	1.75	110	18	50	48	9.0	7.0	4	10.20	●
.244	M14	2.00	110	20	58	56	11.0	9.0	4	12.00	●
.246	M16	2.00	110	20	58	56	12.0	9.0	4	14.00	●
.312	M18	2.50	125	25	65	63	14.0	11.0	4	15.50	●
.314	M20	2.50	140	25	72	70	16.0	12.0	4	17.50	●
.316	M22	2.50	140	25	72	70	18.0	14.5	5	19.50	●
.320	M24	3.00	160	30	74	72	18.0	14.5	5	21.00	●

Application	Material	M	ø	P	v_c	n	v_c	n	v_c	n
			[mm]	[mm]	$1.0 \times d$	[min ⁻¹]	$1.5 \times d$	[min ⁻¹]	$2.0 \times d$	[min ⁻¹]
	Steel 500 - 850 N/mm ²	M 3	3.0	0.50	34	3610	30	3185	24	2545
		M 4	4.0	0.70	34	2705	30	2385	24	1910
		M 5	5.0	0.80	34	2165	30	1910	24	1530
		M 6	6.0	1.00	34	1805	30	1590	24	1275
		M 8	8.0	1.25	34	1355	30	1195	24	955
		M10	10.0	1.50	34	1080	30	955	24	765
		M12	12.0	1.75	34	900	30	795	24	635
		M14	14.0	2.00	34	775	30	680	24	545
		M16	16.0	2.00	34	675	30	595	24	475
	Steel 500 - 850 N/mm ²	M18	18.0	2.50	34	600	30	530	24	425
		M20	20.0	2.50	34	540	30	475	24	380
		M22	22.0	2.50	34	490	30	435	24	345
		M24	24.0	3.00	34	450	30	400	24	320
	Steel 850 - 1100 N/mm ²	M 3	3.0	0.50	22	2335	18	1910	12	1275
		M 4	4.0	0.70	22	1750	18	1430	12	955
		M 5	5.0	0.80	22	1400	18	1145	12	765
		M 6	6.0	1.00	22	1165	18	955	12	635
		M 8	8.0	1.25	22	875	18	715	12	475
		M10	10.0	1.50	22	700	18	575	12	380
		M12	12.0	1.75	22	585	18	475	12	320
		M14	14.0	2.00	22	500	18	410	12	275
		M16	16.0	2.00	22	440	18	360	12	240
	Steel 850 - 1100 N/mm ²	M18	18.0	2.50	22	390	18	320	12	210
		M20	20.0	2.50	22	350	18	285	12	190
		M22	22.0	2.50	22	320	18	260	12	175
		M24	24.0	3.00	22	290	18	240	12	160

Taps x-tap-R




M

ISO 2
(6H)

HSS
PM/F

X - P
Form C

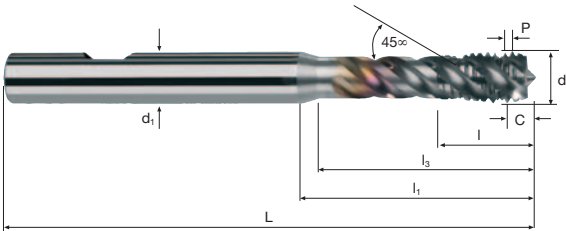


M

Rm
< 850

Rm
850-1100

Example: Order-N°.										TiCN
Article-N°.										EH0590
ø-Code										
ø Code	d	P	L	I	I1	I3	d1 h6			
.044	M 3	0.50	63	5	—	16	6	3	2.50	●
.058	M 4	0.70	66	7	—	19	6	3	3.30	●
.084	M 5	0.80	70	8	—	23	6	3	4.20	●
.088	M 6	1.00	80	10	—	28	6	3	5.00	●
.160	M 8	1.25	90	13	35	33	8	3	6.80	●
.174	M10	1.50	100	15	39	37	10	4	8.50	●
.240	M12	1.75	110	18	45	43	12	4	10.20	●
.244	M14	2.00	110	20	46	44	16	4	12.00	●
.246	M16	2.00	110	20	50	48	16	4	14.00	●
.312	M18	2.50	125	25	60	58	16	4	15.50	●
.314	M20	2.50	140	25	64	62	16	4	17.50	●
.316	M22	2.50	140	25	64	62	20	5	19.50	●
.320	M24	3.00	160	30	74	72	20	5	21.00	●

Application	Material									
	Steel 500 - 850 N/mm ²	M	ø	P	v _c	n				
			[mm]	[mm]	1.0 x d	[min ⁻¹]				
					1.5 x d	[min ⁻¹]				
					2.0 x d	[min ⁻¹]				
		M 4	4.0	0.70	28	2230	24	1910	18	1430
		M 5	5.0	0.80	28	1785	24	1530	18	1145
		M 6	6.0	1.00	28	1485	24	1275	18	955
		M 8	8.0	1.25	28	1115	24	955	18	715
		M10	10.0	1.50	28	890	24	765	18	575
		M12	12.0	1.75	28	745	24	635	18	475
		M14	14.0	2.00	28	635	24	545	18	410
		M16	16.0	2.00	28	555	24	475	18	360
		M18	18.0	2.50	28	495	24	425	18	320
	Steel 500 - 850 N/mm ²	M20	20.0	2.50	28	445	24	380	18	285
		M22	22.0	2.50	28	405	24	345	18	260
		M24	24.0	3.00	28	370	24	320	18	240
	Steel 850 - 1100 N/mm ²	M 4	4.0	0.70	22	1750	18	1430	12	955
		M 5	5.0	0.80	22	1400	18	1145	12	765
		M 6	6.0	1.00	22	1165	18	955	12	635
		M 8	8.0	1.25	22	875	18	715	12	475
		M10	10.0	1.50	22	700	18	575	12	380
		M12	12.0	1.75	22	585	18	475	12	320
		M14	14.0	2.00	22	500	18	410	12	275
		M16	16.0	2.00	22	440	18	360	12	240
		M18	18.0	2.50	22	390	18	320	12	210
	Steel 850 - 1100 N/mm ²	M20	20.0	2.50	22	350	18	285	12	190
		M22	22.0	2.50	22	320	18	260	12	175
		M24	24.0	3.00	22	290	18	240	12	160

Taps x-tap-R

Incool




M

ISO 2
(6H)

HSS
PM/F

Form C

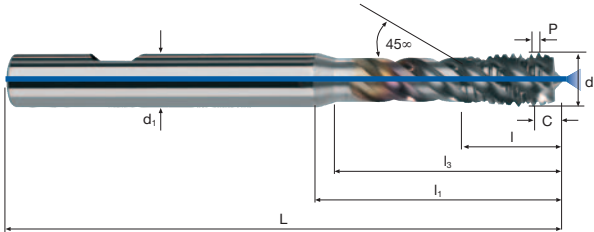


M

Rm
< 850

Rm
850-1100

Example: Order-N°.										TiCN	
Article-N°.										EH0591	
ø-Code											
ø Code	d	P	L	l	l ₁	l ₃	d ₁ h6				
.058	M 4	0.70	66	7	—	19	6	3	3.30		●
.084	M 5	0.80	70	8	—	23	6	3	4.20		●
.088	M 6	1.00	80	10	—	28	6	3	5.00		●
.160	M 8	1.25	90	13	35	33	8	3	6.80		●
.174	M10	1.50	100	15	39	37	10	4	8.50		●
.240	M12	1.75	110	18	45	43	12	4	10.20		●
.244	M14	2.00	110	20	46	44	16	4	12.00		●
.246	M16	2.00	110	20	50	48	16	4	14.00		●
.312	M18	2.50	125	25	60	58	16	4	15.50		●
.314	M20	2.50	140	25	64	62	16	4	17.50		●
.316	M22	2.50	140	25	64	62	20	5	19.50		●
.320	M24	3.00	160	30	74	72	20	5	21.00		●

Application



Material

Steel
1100 - 1300 N/mm²



Steel
1100 - 1300 N/mm²



Steel
1300 - 1500 N/mm²



Steel
1300 - 1500 N/mm²



M	ø	P	v_c	n	v_f	v_c	n	v_f	v_c	n	v_f
	[mm]	[mm]	1.0 x d	[min ⁻¹]	[100%]	1.5 x d	[min ⁻¹]	[100%]	2.0 x d	[min ⁻¹]	[100%]
M 2	2.0	0.40	10	1590	636	8	1275	510	5	795	318
M 2.5	2.5	0.45	10	1275	574	8	1020	459	5	635	286
M 3	3.0	0.50	10	1060	530	8	850	425	5	530	265
M 4	4.0	0.70	10	795	557	8	635	445	5	400	280
M 5	5.0	0.80	10	635	508	8	510	408	5	320	256
M 6	6.0	1.00	10	530	530	8	425	425	5	265	265
M 8	8.0	1.25	10	400	500	8	320	400	5	200	250
M10	10.0	1.50	10	320	480	8	255	383	5	160	240
M12	12.0	1.75	10	265	464	8	210	368	5	135	236
M14	14.0	2.00	10	225	450	8	180	360	5	115	230
M16	16.0	2.00	10	200	400	8	160	320	5	100	200
M18	18.0	2.50	10	175	438	8	140	350	5	90	225
M20	20.0	2.50	10	160	400	8	125	313	5	80	200
M22	22.0	2.50	10	145	363	8	115	288	5	70	175
M24	24.0	3.00	10	135	405	8	105	315	5	65	195
M 2	2.0	0.40	6	955	382	4	635	254	3	475	190
M 2.5	2.5	0.45	6	765	344	4	510	230	3	380	171
M 3	3.0	0.50	6	635	318	4	425	213	3	320	160
M 4	4.0	0.70	6	475	333	4	320	224	3	240	168
M 5	5.0	0.80	6	380	304	4	255	204	3	190	152
M 6	6.0	1.00	6	320	320	4	210	210	3	160	160
M 8	8.0	1.25	6	240	300	4	160	200	3	120	150
M10	10.0	1.50	6	190	285	4	125	188	3	95	143
M12	12.0	1.75	6	160	280	4	105	184	3	80	140
M14	14.0	2.00	6	135	270	4	90	180	3	70	140
M16	16.0	2.00	6	120	240	4	80	160	3	60	120
M18	18.0	2.50	6	105	263	4	70	175	3	55	138
M20	20.0	2.50	6	95	238	4	65	163	3	50	125
M22	22.0	2.50	6	85	213	4	60	150	3	45	113
M24	24.0	3.00	6	80	240	4	55	165	3	40	120


M

ISO 2
(6H)

HSS
PM/F

DIN
371/376

Form B

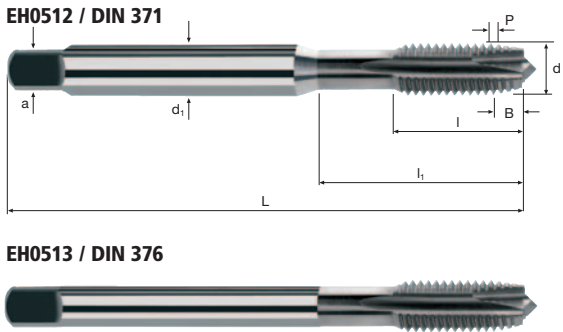

		Rm 1100-1300	Rm 1300-1500						
--	--	-----------------	-----------------	--	--	--	--	--	--

Example: Order-Nº. Article-Nº. Ø-Code EH0512 .034										TiCN
Ø Code	d	P	L	I	I1	d1	a			EH0512
.034	M 2	0.40	45	8	—	2.8	2.1	2	1.70 *	●
.040	M 2.5	0.45	50	9	—	2.8	2.1	2	2.10	●
.044	M 3	0.50	56	12	18.0	3.5	2.7	3	2.60 *	●
.058	M 4	0.70	63	13	21.0	4.5	3.4	3	3.40	●
.084	M 5	0.80	70	15	25.0	6.0	4.9	3	4.30	●
.088	M 6	1.00	80	17	30.0	6.0	4.9	3	5.10	●
.160	M 8	1.25	90	20	35.0	8.0	6.2	3	6.90	●
.174	M10	1.50	100	22	39.0	10.0	8.0	3	8.60	●

Example: Order-Nº. Article-Nº. Ø-Code EH0513 .240										TiCN
Ø Code	d	P	L	I	I1	d1	a			EH0513
.240	M12	1.75	110	24	40.0	9.0	7.0	3	10.40	●
.244	M14	2.00	110	26	40.0	11.0	9.0	3	12.20	●
.246	M16	2.00	110	27	40.0	12.0	9.0	3	14.20	●
.312	M18	2.50	125	30	45.0	14.0	11.0	4	15.70	●
.314	M20	2.50	140	32	50.0	16.0	12.0	4	17.70	●
.316	M22	2.50	140	32	50.0	18.0	14.5	4	19.70	●
.320	M24	3.00	160	34	60.0	18.0	14.5	4	21.20	●
* The given dimension is out of norm										

Application	Material									
		M	ø	P	v_c	n	v_f	v_c	n	v_f
			[mm]	[mm]	1.0 x d	[min ⁻¹]	[100%]	1.5 x d	[min ⁻¹]	[100%]
	Steel 1100 - 1300 N/mm ²	M 3	3.0	0.50	6	635	318	5	530	265
		M 4	4.0	0.70	6	475	333	5	400	280
		M 5	5.0	0.80	6	380	304	5	320	256
		M 6	6.0	1.00	6	320	320	5	265	265
		M 8	8.0	1.25	6	240	300	5	200	250
		M10	10.0	1.50	6	190	285	5	160	240
		M12	12.0	1.75	6	160	280	5	135	236
		M14	14.0	2.00	6	135	270	5	115	230
		M16	16.0	2.00	6	120	240	5	100	200
	Steel 1100 - 1300 N/mm ²	M18	18.0	2.50	6	105	263	5	90	225
		M20	20.0	2.50	6	95	238	5	80	200
		M22	22.0	2.50	6	85	213	5	70	175
		M24	24.0	3.00	6	80	240	5	65	195
	Steel 1300 - 1500 N/mm ²	M 3	3.0	0.50	5	530	265	4	425	213
		M 4	4.0	0.70	5	400	280	4	320	224
		M 5	5.0	0.80	5	320	256	4	255	204
		M 6	6.0	1.00	5	265	265	4	210	210
		M 8	8.0	1.25	5	200	250	4	160	200
		M10	10.0	1.50	5	160	240	4	125	188
		M12	12.0	1.75	5	135	236	4	105	184
		M14	14.0	2.00	5	115	230	4	90	180
		M16	16.0	2.00	5	100	200	4	80	160
	Steel 1300 - 1500 N/mm ²	M18	18.0	2.50	5	90	225	4	70	175
		M20	20.0	2.50	5	80	200	4	65	163
		M22	22.0	2.50	5	70	175	4	60	150
		M24	24.0	3.00	5	65	195	4	55	165

Taps h-tap




M

ISO 2
(6H)

HSS
PM/F

X - P
Form C

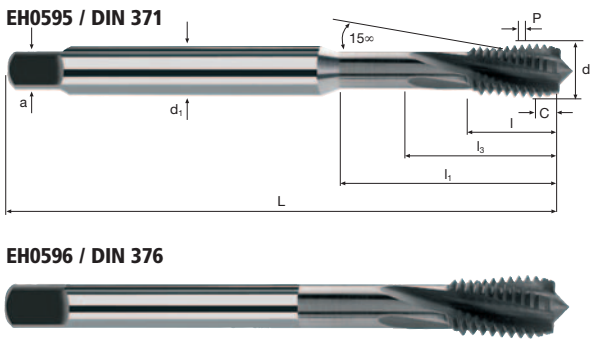

		Rm 1100-1300	Rm 1300-1500							
--	--	-----------------	-----------------	--	--	--	--	--	--	--

Example: Order-N°.											TiCN
Article-N°.											EH0595
ø-Code											
ø	d	P	L	l	l1	l3	d1	a			
.044	M 3	0.50	56	5	18	16	3.5	2.7	3	2.60 *	●
.058	M 4	0.70	63	7	21	19	4.5	3.4	3	3.40	●
.084	M 5	0.80	70	8	25	23	6.0	4.9	3	4.30	●
.088	M 6	1.00	80	10	30	28	6.0	4.9	3	5.10	●
.160	M 8	1.25	90	13	35	33	8.0	6.2	3	6.90	●
.174	M10	1.50	100	15	39	37	10.0	8.0	4	8.60	●

Example: Order-N°.											TiCN
Article-N°.											EH0596
ø-Code											
ø	d	P	L	l	l1	l3	d1	a			
.240	M12	1.75	110	18	50	48	9.0	7.0	4	10.40	●
.244	M14	2.00	110	20	58	56	11.0	9.0	4	12.20	●
.246	M16	2.00	110	20	58	56	12.0	9.0	4	14.20	●
.312	M18	2.50	125	25	65	63	14.0	11.0	4	15.70	●
.314	M20	2.50	140	25	72	70	16.0	12.0	4	17.70	●
.316	M22	2.50	140	25	72	70	18.0	14.5	4	19.70	●
.320	M24	3.00	160	30	74	72	18.0	14.5	5	21.20	●
* The given dimension is out of norm											

Taps durotap H




M

ISO 2
(6H)

HM
MG10

X - P
Form C

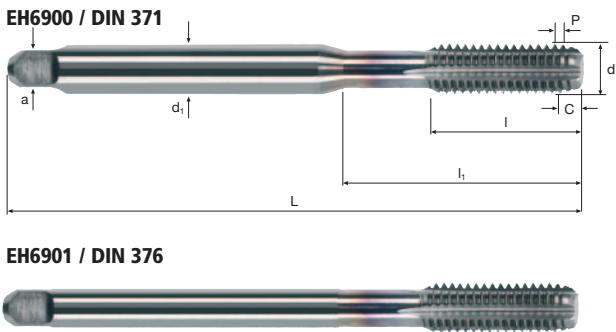

M

HRC
48-56

HRC
56-60

HRC
> 60

Example: Order-N°.										TiCN	
Article-N°.										EH6900	
ø-Code											
ø	d	P	L	I	I ₁	d ₁	a				
.058	M 4	0.70	63	13	21	4.5	3.4	4	3.40	●	
.084	M 5	0.80	70	15	25	6.0	4.9	4	4.30	●	
.088	M 6	1.00	80	17	30	6.0	4.9	4	5.10	●	
.160	M 8	1.25	90	20	35	8.0	6.2	5	6.90	●	
.174	M10	1.50	100	22	39	10.0	8.0	5	8.60	●	

Example: Order-N°.										TiCN	
Article-N°.										EH6901	
ø-Code											
ø	d	P	L	I	I ₁	d ₁	a				
.240	M12	1.75	110	24	40	9.0	7.0	5	10.40	●	
.244	M14	2.00	110	26	40	11.0	9.0	5	12.20	●	
.246	M16	2.00	110	27	40	12.0	9.0	5	14.20	●	




M

ISO 2
(6H)

HSS
PM/F

DIN
371/376

Form B

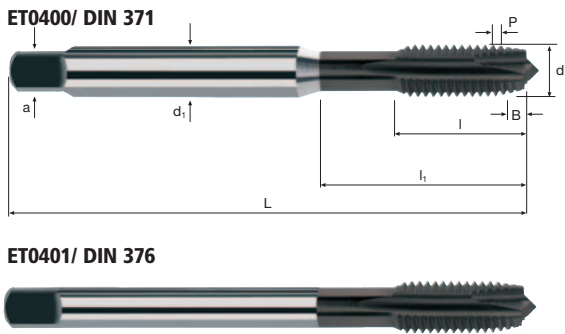

M

Inox
Stainless

Example: Order-N°.										TRIBO	
Article-N°.										ET0400	
ø-Code											
ø Code	d	P	L	l	l ₁	d ₁	a				
.034	M 2	0.40	45	8	—	2.8	2.1	2	1.70 *		●
.040	M 2.5	0.45	50	9	—	2.8	2.1	2	2.10		●
.044	M 3	0.50	56	12	18.0	3.5	2.7	3	2.60 *		●
.058	M 4	0.70	63	13	21.0	4.5	3.4	3	3.40		●
.084	M 5	0.80	70	15	25.0	6.0	4.9	3	4.30		●
.088	M 6	1.00	80	17	30.0	6.0	4.9	3	5.10		●
.160	M 8	1.25	90	20	35.0	8.0	6.2	3	6.90		●
.174	M10	1.50	100	22	39.0	10.0	8.0	3	8.60		●

Example: Order-N°.										TRIBO	
Article-N°.										ET0401	
ø-Code											
ø Code	d	P	L	l	l ₁	d ₁	a				
.240	M12	1.75	110	24	40.0	9.0	7.0	3	10.40		●
.244	M14	2.00	110	26	40.0	11.0	9.0	3	12.20		●
.246	M16	2.00	110	27	40.0	12.0	9.0	3	14.20		●
.312	M18	2.50	125	30	45.0	14.0	11.0	4	15.70		●
.314	M20	2.50	140	32	50.0	16.0	12.0	4	17.70		●
.316	M22	2.50	140	32	50.0	18.0	14.5	4	19.70		●
.320	M24	3.00	160	34	60.0	18.0	14.5	4	21.20		●
* The given dimension is out of norm											

Taps x-tap




M

ISO 2
(6H)

HSS
PM/F

DIN
371/376

Form C

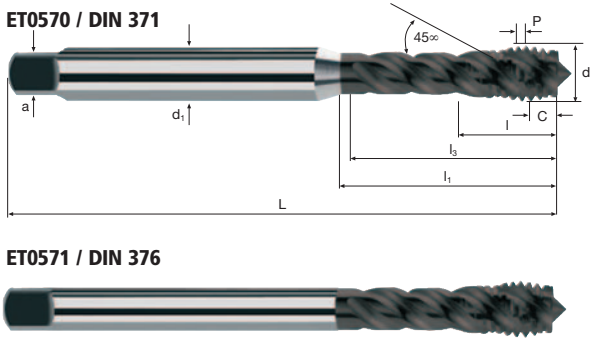

Inox
Stainless

Example: Order-N°.											TRIBO
Article-N°.											ET0570
ø-Code											
ø Code	d	P	L	l	l1	l3	d1	a			
.034	M 2	0.40	45	8	—	10.5	2.8	2.1	3	1.70 *	●
.040	M 2.5	0.45	50	9	—	13.0	2.8	2.1	3	2.10	●
.044	M 3	0.50	56	5	—	16.0	3.5	2.7	3	2.60 *	●
.058	M 4	0.70	63	7	—	19.0	4.5	3.4	3	3.40	●
.084	M 5	0.80	70	8	—	23.0	6.0	4.9	3	4.30	●
.088	M 6	1.00	80	10	—	28.0	6.0	4.9	3	5.10	●
.160	M 8	1.25	90	13	35.0	33.0	8.0	6.2	3	6.90	●
.174	M10	1.50	100	15	39.0	37.0	10.0	8.0	4	8.60	●

Example: Order-N°.											TRIBO
Article-N°.											ET0571
ø-Code											
ø Code	d	P	L	l	l1	l3	d1	a			
.240	M12	1.75	110	18	50.0	48.0	9.0	7.0	4	10.40	●
.244	M14	2.00	110	20	58.0	56.0	11.0	9.0	4	12.20	●
.246	M16	2.00	110	20	58.0	56.0	12.0	9.0	4	14.20	●
.312	M18	2.50	125	25	65.0	63.0	14.0	11.0	4	15.70	●
.314	M20	2.50	140	25	72.0	70.0	16.0	12.0	4	17.70	●
.316	M22	2.50	140	25	72.0	70.0	18.0	14.5	5	19.70	●
.320	M24	3.00	160	30	74.0	72.0	18.0	14.5	5	21.20	●
* The given dimension is out of norm											

A schematic diagram of a mechanical system. It consists of a mass (represented by a grey rectangle) supported by a spring (represented by a coiled line) and a damper (represented by a piston in a fluid-filled cylinder). The mass is connected to a fixed base (represented by a hatched rectangle) via the spring and damper. Red arrows indicate the displacement of the mass from its equilibrium position.

Stainless steel
ferritic/martensitic

[illegible]

Stainless steel
[Cr-Ni-Mo-.../1.4571]

[illegible]

Taps x-tap

Incool




M ISO 2 (6H)

60° HSS PM/F

DIN 371/376

X-P Form C

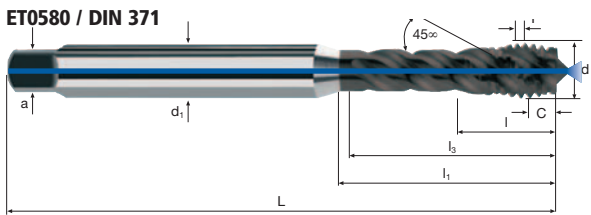

ET0581 / DIN 376



Article-N°.											TRIBO
Example: Order-N°.											ET0580
Ø Code	d	P	L	l	l1	l3	d1	a			
.058	M 4	0.70	63	7	—	19	4.5	3.4	3	3.40	●
.084	M 5	0.80	70	8	—	23	6.0	4.9	3	4.30	●
.088	M 6	1.00	80	10	—	28	6.0	4.9	3	5.10	●
.160	M 8	1.25	90	13	35	33	8.0	6.2	3	6.90	●
.174	M10	1.50	100	15	39	37	10.0	8.0	4	8.60	●

Article-N°.											TRIBO
Example: Order-N°.											ET0581
Ø Code	d	P	L	l	l1	l3	d1	a			
.240	M12	1.75	110	18	50	48	9.0	7.0	4	10.40	●
.244	M14	2.00	110	20	58	56	11.0	9.0	4	12.20	●
.246	M16	2.00	110	20	58	56	12.0	9.0	4	14.20	●
.312	M18	2.50	125	25	65	63	14.0	11.0	4	15.70	●
.314	M20	2.50	140	25	72	70	16.0	12.0	4	17.70	●
.316	M22	2.50	140	25	72	70	18.0	14.5	5	19.70	●
.320	M24	3.00	160	30	74	72	18.0	14.5	5	21.20	●

Taps x-tap-R

Incool




M

ISO 2
(6H)

HSS
PM/F

X - P
Form C

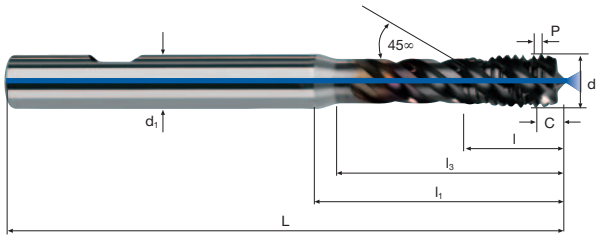

M

Inox
Stainless

Example: Order-N°.										TRIBO	
Article-N°.										ET0591	
ø-Code											
ø Code	d	P	L	l	l1	l3	d1 h6				
.058	M 4	0.70	66	7	—	19	6	3	3.40		●
.084	M 5	0.80	70	8	—	23	6	3	4.30		●
.088	M 6	1.00	80	10	—	28	6	3	5.10		●
.160	M 8	1.25	90	13	35	33	8	3	6.90		●
.174	M10	1.50	100	15	39	37	10	4	8.60		●
.240	M12	1.75	110	18	45	43	12	4	10.40		●
.244	M14	2.00	110	20	46	44	16	4	12.20		●
.246	M16	2.00	110	20	50	48	16	4	14.20		●
.312	M18	2.50	125	25	60	58	16	4	15.70		●
.314	M20	2.50	140	25	64	62	16	4	17.70		●
.316	M22	2.50	140	25	64	62	20	5	19.70		●
.320	M24	3.00	160	30	74	72	20	5	21.20		●

Taps c-tap




M

ISO 2
(6H)

HSS
PM/F


X - P
Form C

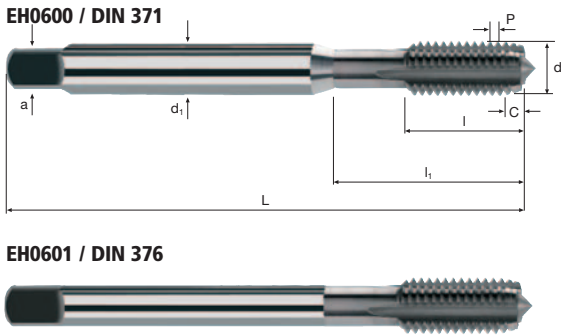


GG(G)

Example: Order-Nº. Article-Nº. ø-Code EH0600 .034											TiCN
Ø Code	d	P	L	I	I ₁	d ₁	a				EH0600
.034	M 2	0.40	45	8	—	2.8	2.1	3	1.60		●
.040	M 2.5	0.45	50	9	—	2.8	2.1	3	2.05		●
.044	M 3	0.50	56	12	18.0	3.5	2.7	3	2.50		●
.058	M 4	0.70	63	13	21.0	4.5	3.4	3	3.30		●
.084	M 5	0.80	70	15	25.0	6.0	4.9	3	4.20		●
.088	M 6	1.00	80	17	30.0	6.0	4.9	4	5.00		●
.160	M 8	1.25	90	20	35.0	8.0	6.2	4	6.80		●
.174	M10	1.50	100	22	39.0	10.0	8.0	4	8.50		●

Example: Order-Nº. Article-Nº. ø-Code EH0601 .240											TiCN
Ø Code	d	P	L	I	I ₁	d ₁	a				EH0601
.240	M12	1.75	110	24	40.0	9.0	7.0	4	10.20		●
.244	M14	2.00	110	26	40.0	11.0	9.0	4	12.00		●
.246	M16	2.00	110	27	40.0	12.0	9.0	4	14.00		●
.312	M18	2.50	125	30	45.0	14.0	11.0	4	15.50		●
.314	M20	2.50	140	32	50.0	16.0	12.0	4	17.50		●
.316	M22	2.50	140	32	50.0	18.0	14.5	5	19.50		●
.320	M24	3.00	160	34	60.0	18.0	14.5	5	21.00		●

Application	Material	M	ø	P	V _c	n	v _f	V _c	n	v _f	V _c	n	v _f
			[mm]	[mm]	1.0 x d	[min ⁻¹]	[100%]	1.5 x d	[min ⁻¹]	[100%]	2.0 x d	[min ⁻¹]	[100%]
	Cast iron GG	M 4	4.0	0.70	28	2230	1561	24	1910	1337	20	1590	1113
		M 5	5.0	0.80	28	1785	1428	24	1530	1224	20	1275	1020
		M 6	6.0	1.00	28	1485	1485	24	1275	1275	20	1060	1060
		M 8	8.0	1.25	28	1115	1394	24	955	1194	20	795	994
		M10	10.0	1.50	28	890	1335	24	765	1148	20	635	953
		M12	12.0	1.75	28	745	1304	24	635	1111	20	530	928
		M14	14.0	2.00	28	635	1270	24	545	1090	20	455	910
		M16	16.0	2.00	28	555	1110	24	475	950	20	400	800
		M18	18.0	2.50	28	495	1238	24	425	1063	20	355	888
Cast iron GG	M20	20.0	2.50	28	445	1113	24	380	950	20	320	800	
	M22	22.0	2.50	28	405	1013	24	345	863	20	290	725	
	M24	24.0	3.00	28	370	1110	24	320	960	20	265	795	
Cast iron GGG	M 4	4.0	0.40	20	1590	636	18	1430	572	15	1195	478	
	M 5	5.0	0.45	20	1275	574	18	1145	515	15	955	430	
	M 6	6.0	0.50	20	1060	530	18	955	478	15	795	398	
	M 8	8.0	0.70	20	795	557	18	715	500	15	595	417	
	M10	10.0	0.80	20	635	508	18	575	460	15	475	380	
	M12	12.0	1.00	20	530	530	18	475	475	15	400	400	
	M14	14.0	1.25	20	455	569	18	410	513	15	340	425	
	M16	16.0	1.50	20	400	600	18	360	540	15	300	450	
	M18	18.0	1.75	20	355	621	18	320	560	15	265	464	
Cast iron GGG	M20	20.0	2.00	20	320	640	18	285	570	15	240	480	
	M22	22.0	2.00	20	290	580	18	260	520	15	215	430	
	M24	24.0	2.50	20	265	663	18	240	600	15	200	500	


**ISO 2
(6H)**

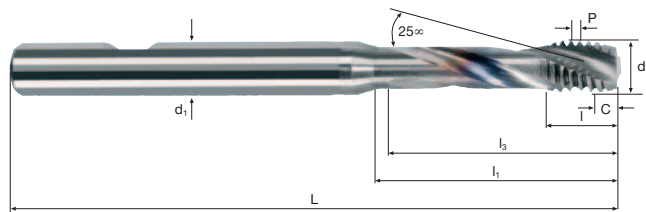

M

GG(G)

www.fraisa.com

Application	Material	M	ø	P	v_c	n	v_c	n	v_c	n
			[mm]	[mm]	$1.0 \times d$	[min ⁻¹]	$1.5 \times d$	[min ⁻¹]	$2.0 \times d$	[min ⁻¹]
	Cast iron GG	M 6	6.0	1.00	80	4245	70	3715	50	2655
		M 8	8.0	1.25	80	3185	70	2785	50	1990
		M10	10.0	1.50	80	2545	70	2230	50	1590
		M12	12.0	1.75	80	2120	70	1855	50	1325
	Cast iron GGG	M 6	6.0	1.00	60	3185	40	2120	30	1590
		M 8	8.0	1.25	60	2385	40	1590	30	1195
		M10	10.0	1.50	60	1910	40	1275	30	955
		M12	12.0	1.75	60	1590	40	1060	30	795

Taps durotap GG-R

Incool




M

**ISO 2
(6H)**



**HM
MG10**

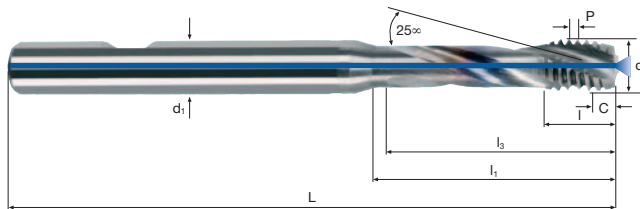

M

GG(G)

Application	Material	M	ø	P	v_c	n	v_c	n	v_c	n
			[mm]	[mm]	$1.0 \times d$	[min ⁻¹]	$1.5 \times d$	[min ⁻¹]	$2.0 \times d$	[min ⁻¹]
	Cast iron GG	M 3	3.0	0.50	80	8490	70	7425	50	5305
		M 4	4.0	0.70	80	6365	70	5570	50	3980
		M 5	5.0	0.80	80	5095	70	4455	50	3185
		M 6	6.0	1.00	80	4245	70	3715	50	2655
		M 8	8.0	1.25	80	3185	70	2785	50	1990
		M10	10.0	1.50	80	2545	70	2230	50	1590
		M12	12.0	1.75	80	2120	70	1855	50	1325
Cast iron GGG		M 3	3.0	0.50	60	6365	40	4245	30	3185
		M 4	4.0	0.70	60	4775	40	3185	30	2385
		M 5	5.0	0.80	60	3820	40	2545	30	1910
		M 6	6.0	1.00	60	3185	40	2120	30	1590
		M 8	8.0	1.25	60	2385	40	1590	30	1195
		M10	10.0	1.50	60	1910	40	1275	30	955
		M12	12.0	1.75	60	1590	40	1060	30	795

Incool



ISO 2
(6H)




**HM
MG10**



A cross-sectional diagram of a butt joint. Two plates, represented by diagonal hatching, are joined by a square groove weld. The weld metal is shown as a solid white area filling the square groove. The root of the joint is indicated by a small gap at the bottom center.



Form C

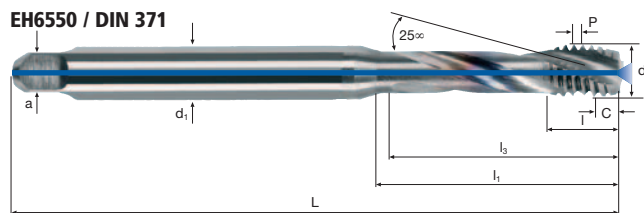**EH6551 / DIN 376**

GG(G)

[illegible]




M

ISO 2
(6H)

HSS
PM/F

DIN
371/376

Form B

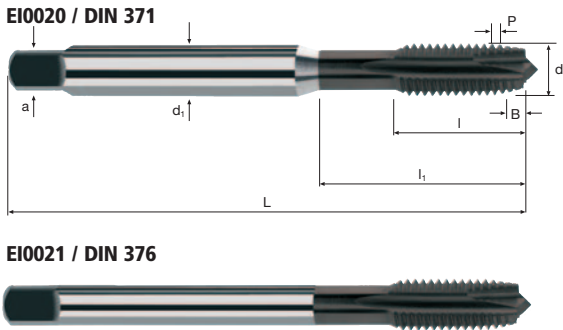

Al
Aluminium
> 99%

Al
Aluminium
Alloy

Al
Aluminium
Cast

Cu
Copper

Plastic
Thermoplast

Example: Order-Nº.										INTEGRAL	
Article-Nº. ø-Code										EI0020	
ø Code	d	P	L	l	l ₁	d ₁	a				
.034	M 2	0.40	45	8	—	2.8	2.1	2	1.60		●
.040	M 2.5	0.45	50	9	—	2.8	2.1	2	2.05		●
.044	M 3	0.50	56	12	18.0	3.5	2.7	2	2.50		●
.058	M 4	0.70	63	13	21.0	4.5	3.4	2	3.30		●
.084	M 5	0.80	70	15	25.0	6.0	4.9	2	4.20		●
.088	M 6	1.00	80	17	30.0	6.0	4.9	2	5.00		●
.160	M 8	1.25	90	20	35.0	8.0	6.2	2	6.80		●
.174	M10	1.50	100	22	39.0	10.0	8.0	2	8.50		●

Example: Order-Nº.										INTEGRAL	
Article-Nº. ø-Code										EI0021	
ø Code	d	P	L	l	l ₁	d ₁	a				
.240	M12	1.75	110	24	40.0	9.0	7.0	3	10.20		●
.244	M14	2.00	110	26	40.0	11.0	9.0	3	12.00		●
.246	M16	2.00	110	27	40.0	12.0	9.0	3	14.00		●
.312	M18	2.50	125	30	45.0	14.0	11.0	3	15.50		●
.314	M20	2.50	140	32	50.0	16.0	12.0	3	17.50		●
.316	M22	2.50	140	32	50.0	18.0	14.5	3	19.50		●
.320	M24	3.00	160	34	60.0	18.0	14.5	3	21.00		●




M

ISO 2
(6H)

HSS
PM/F

DIN
371/376

Form C

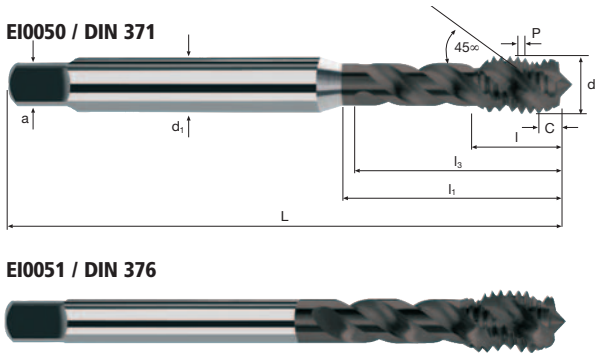

M

Al
Aluminium
> 99%

Al
Aluminium
Alloy

Al
Aluminium
Cast


Cu
Copper

Plastic
Thermoplast

Article-Nº. ø-Code											INTEGRAL	
Example: Order-Nº. E10050 .034											E10050	
Ø Code	d	P	L	l	l1	l2	d1	a				
.034	M 2	0.40	45	8	—	10.5	2.8	2.1	3	1.60		●
.040	M 2.5	0.45	50	9	—	13.0	2.8	2.1	3	2.05		●
.044	M 3	0.50	56	5	18.0	16.0	3.5	2.7	3	2.50		●
.058	M 4	0.70	63	7	21.0	19.0	4.5	3.4	3	3.30		●
.084	M 5	0.80	70	8	25.0	23.0	6.0	4.9	3	4.20		●
.088	M 6	1.00	80	10	30.0	28.0	6.0	4.9	3	5.00		●
.160	M 8	1.25	90	13	35.0	33.0	8.0	6.2	3	6.80		●
.174	M10	1.50	100	15	39.0	37.0	10.0	8.0	3	8.50		●

Article-Nº. ø-Code											INTEGRAL	
Example: Order-Nº. E10051 .240											E10051	
Ø Code	d	P	L	l	l1	l2	d1	a				
.240	M12	1.75	110	18	50.0	48.0	9.0	7.0	3	10.20		●
.244	M14	2.00	110	20	58.0	56.0	11.0	9.0	4	12.00		●
.246	M16	2.00	110	20	58.0	56.0	12.0	9.0	4	14.00		●
.312	M18	2.50	125	25	65.0	63.0	14.0	11.0	4	15.50		●
.314	M20	2.50	140	25	72.0	70.0	16.0	12.0	4	17.50		●
.316	M22	2.50	140	25	72.0	70.0	18.0	14.5	4	19.50		●
.320	M24	3.00	160	30	74.0	72.0	18.0	14.5	4	21.00		●

ISO 2
(6H)

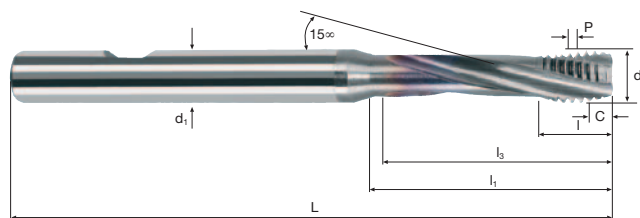

M

Cu
Copper

GG(G)

www.fraisa.com

Application	Material	M	ø	P	v_c	n	v_c	n	v_c	n
			[mm]	[mm]	$1.0 \times d$	[min ⁻¹]	$1.5 \times d$	[min ⁻¹]	$2.0 \times d$	[min ⁻¹]
	Cast aluminium	M 6	6.0	1.00	80	4245	60	3185	40	2120
		M 7	7.0	1.00	80	3640	60	2730	40	1820
		M 8	8.0	1.25	80	3185	60	2385	40	1590
		M10	10.0	1.50	80	2545	60	1910	40	1275
CuAlFe (Ampco)		M 6	6.0	1.00	10	530	8	425	7	370
		M 7	7.0	1.00	10	455	8	365	7	320
		M 8	8.0	1.25	10	400	8	320	7	280
		M10	10.0	1.50	10	320	8	255	7	225

Application	Material	M	ø	P	v_c	n	v_f	v_c	n	v_f	v_c	n	v_f
			[mm]	[mm]	$1.0 \times d$	[min ⁻¹]	[100%]	$1.5 \times d$	[min ⁻¹]	[100%]	$2.0 \times d$	[min ⁻¹]	[100%]
	Cast aluminium	M 4	4.0	0.70	80	6365	4456	60	4775	3343	40	3185	2230
		M 5	5.0	0.80	80	5095	4076	60	3820	3056	40	2545	2036
		M 6	6.0	1.00	80	4245	4245	60	3185	3185	40	2120	2120
		M 8	8.0	1.25	80	3185	3981	60	2385	2981	40	1590	1988
		M10	10.0	1.50	80	2545	3818	60	1910	2865	40	1275	1913
		M12	12.0	1.75	80	2120	3710	60	1590	2783	40	1060	1855
		M14	14.0	2.00	80	1820	3640	60	1365	2730	40	910	1820
		M16	16.0	2.00	80	1590	3180	60	1195	2390	40	795	1590
	CuAlFe (Ampco)	M 4	4.0	0.70	10	795	557	8	635	445	7	555	389
		M 5	5.0	0.80	10	635	508	8	510	408	7	445	356
		M 6	6.0	1.00	10	530	530	8	425	425	7	370	370
		M 8	8.0	1.25	10	400	500	8	320	400	7	280	350
		M10	10.0	1.50	10	320	480	8	255	383	7	225	338
		M12	12.0	1.75	10	265	464	8	210	368	7	185	324
		M14	14.0	2.00	10	225	450	8	180	360	7	160	320
		M16	16.0	2.00	10	200	400	8	160	320	7	140	280

Taps durotap A

Incool




M

ISO 2
(6H)

HM
MG10

X - P
Form C

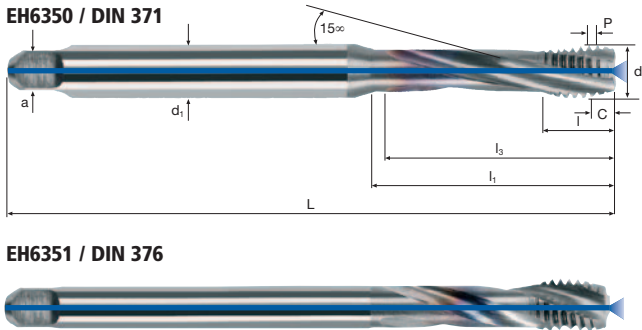

Al
Aluminium
Cast

Cu
Copper

GG(G)

Example: Order-N°.											TiCN
Article-N°.											EH6350
ø-Code											
ø	d	P	L	I	I1	I3	d1	a			
.058 *	M 4	0.70	63	7	21	19	4.5	3.4	3	3.30	●
.084 *	M 5	0.80	70	8	25	23	6.0	4.9	3	4.20	●
.088	M 6	1.00	80	10	30	28	6.0	4.9	3	5.00	●
.160	M 8	1.25	90	13	35	33	8.0	6.2	3	6.80	●
.174	M10	1.50	100	15	39	37	10.0	8.0	3	8.50	●

Example: Order-N°.											TiCN
Article-N°.											EH6351
ø-Code											
ø	d	P	L	I	I1	I3	d1	a			
.240	M12	1.75	110	18	50	48	9.0	7.0	3	10.20	●
.244	M14	2.00	110	20	58	56	11.0	9.0	4	12.00	●
.246	M16	2.00	110	20	58	56	12.0	9.0	4	14.00	●
* without internal cooling											

Application	Material	M	ø	P	v_c	n	v_f	v_c	n	v_f	v_c	n	v_f
		[mm]	[mm]		1.5 x d	[min ⁻¹]	[100%]	2.0 x d	[min ⁻¹]	[100%]	3.0 x d	[min ⁻¹]	[100%]
	Titanium alloys > 300 HB [Ti6Al4V] 	M 1.2	1.2	0.25	4	1060	265	3	795	199	2	530	133
		M 1.4	1.4	0.30	4	910	273	3	680	204	2	455	137
		M 1.6	1.6	0.35	4	795	278	3	595	208	2	400	140
		M 1.8	1.8	0.35	4	705	247	3	530	186	2	355	124
		M 2	2.0	0.40	4	635	254	3	475	190	2	320	128
		M 2.5	2.5	0.45	4	510	230	3	380	171	2	255	115
		M 3	3.0	0.50	5	530	265	4	425	213	3	320	160
		M 3.5	3.5	0.60	5	455	273	4	365	219	3	275	165
		M 4	4.0	0.70	5	400	280	4	320	224	3	240	168
	Titanium alloys > 300 HB [Ti6Al4V] 	M 5	5.0	0.80	5	320	256	4	255	204	3	190	152
		M 6	6.0	1.00	5	265	265	4	210	210	3	160	160
		M 8	8.0	1.25	5	200	250	4	160	200	3	120	150
		M10	10.0	1.50	5	160	240	4	125	188	3	95	143

Application	Material	<table> <tr> <th>M</th><th>ø</th><th>P</th><th>v_c</th><th>n</th><th>v_f</th><th>v_c</th><th>n</th><th>v_f</th><th>v_c</th><th>n</th><th>v_f</th></tr> <tr> <th></th><th>[mm]</th><th>[mm]</th><th>$1.5 \times d$</th><th>[min⁻¹]</th><th>[100%]</th><th>$2.0 \times d$</th><th>[min⁻¹]</th><th>[100%]</th><th>$3.0 \times d$</th><th>[min⁻¹]</th><th>[100%]</th></tr> </table>												M	ø	P	v_c	n	v_f	v_c	n	v_f	v_c	n	v_f		[mm]	[mm]	$1.5 \times d$	[min ⁻¹]	[100%]	$2.0 \times d$	[min ⁻¹]	[100%]	$3.0 \times d$	[min ⁻¹]	[100%]
M	ø	P	v_c	n	v_f	v_c	n	v_f	v_c	n	v_f																										
	[mm]	[mm]	$1.5 \times d$	[min ⁻¹]	[100%]	$2.0 \times d$	[min ⁻¹]	[100%]	$3.0 \times d$	[min ⁻¹]	[100%]																										
	Titanium alloys > 300 HB [Ti6Al4V]  	M12	12.0	1.75	5	135	236	4	105	184	3	80	140																								
		M14	14.0	2.00	5	115	230	4	90	180	3	70	140																								
		M16	16.0	2.00	5	100	200	4	80	160	3	60	120																								
		M18	18.0	2.50	5	90	225	4	70	175	3	55	138																								
		M20	20.0	2.50	5	80	200	4	65	163	3	50	125																								
		M22	22.0	2.50	5	70	175	4	60	150	3	45	113																								
		M24	24.0	3.00	5	65	195	4	55	165	3	40	120																								




M

ISO 2
(6H)



**HSS
PM/F**

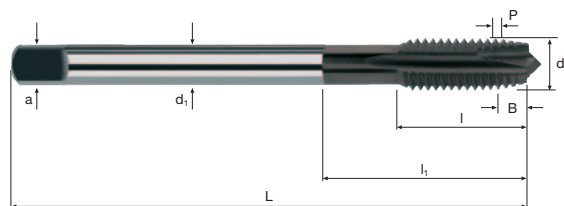

M

Ti
Titanium

[illegible]

Application	Material	M	ø	P	v_c	n	v_f	v_c	n	v_f	
			[mm]	[mm]	1.0 x d	[min ⁻¹]	[100%]	1.5 x d	[min ⁻¹]	[100%]	
	Titanium alloys > 300 HB [Ti6Al4V]	M 2	2.0	0.40	4	635	254	3	475	190	
		M 2.5	2.5	0.45	4	510	230	3	380	171	
		M 3	3.0	0.50	5	530	265	4	425	213	
		M 3.5	3.5	0.60	5	455	273	4	365	219	
		M 4	4.0	0.70	5	400	280	4	320	224	
		M 5	5.0	0.80	5	320	256	4	255	204	
		M 6	6.0	1.00	5	265	265	4	210	210	
		M 8	8.0	1.25	5	200	250	4	160	200	
		M10	10.0	1.50	5	160	240	4	125	188	
	Titanium alloys > 300 HB [Ti6Al4V]	M12	12.0	1.75	5	135	236	4	105	184	
		M14	14.0	2.00	5	115	230	4	90	180	
		M16	16.0	2.00	5	100	200	4	80	160	
		M18	18.0	2.50	5	90	225	4	70	175	
		M20	20.0	2.50	5	80	200	4	65	163	
		M22	22.0	2.50	5	70	175	4	60	150	
		M24	24.0	3.00	5	65	195	4	55	165	




M

ISO 2
(6H)

HSS
PM/F

DIN
371/376

Form C

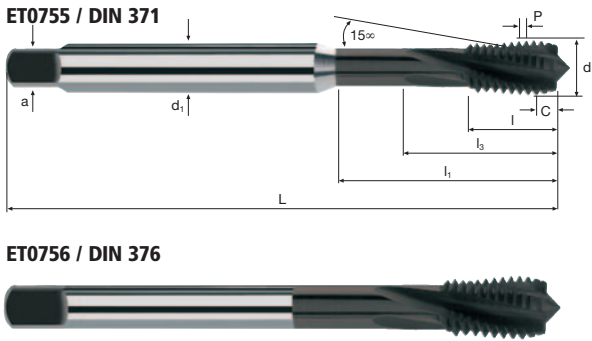


Ti
Titanium

Example: Order-Nº. Article-Nº. ø-Code ET0755 .034											TRIBO
Ø Code	d	P	L	l	l1	l3	d1	a			ET0755
.034	M 2	0.40	45	8	—	10.5	2.8	2.1	3	1.70 *	●
.040	M 2.5	0.45	50	9	—	13.0	2.8	2.1	3	2.10	●
.044	M 3	0.50	56	5	18.0	16.0	3.5	2.7	3	2.60 *	●
.056	M 3.5	0.60	56	6	20.0	18.0	4.0	3.0	3	3.00	●
.058	M 4	0.70	63	7	21.0	19.0	4.5	3.4	3	3.40	●
.084	M 5	0.80	70	8	25.0	23.0	6.0	4.9	3	4.30	●
.088	M 6	1.00	80	10	30.0	28.0	6.0	4.9	3	5.10	●
.160	M 8	1.25	90	13	35.0	33.0	8.0	6.2	3	6.90	●
.174	M10	1.50	100	15	39.0	37.0	10.0	8.0	4	8.60	●


Example: Order-Nº. Article-Nº. ø-Code ET0756 .240											TRIBO
Ø Code	d	P	L	l	l1	l3	d1	a			ET0756
.240	M12	1.75	110	18	50.0	48.0	9.0	7.0	4	10.40	●
.244	M14	2.00	110	20	58.0	56.0	11.0	9.0	4	12.20	●
.246	M16	2.00	110	20	58.0	56.0	12.0	9.0	4	14.20	●
.312	M18	2.50	125	25	65.0	63.0	14.0	11.0	5	15.70	●
.314	M20	2.50	140	25	72.0	70.0	16.0	12.0	5	17.70	●
.316	M22	2.50	140	25	72.0	70.0	18.0	14.5	5	19.70	●
.320	M24	3.00	160	30	74.0	72.0	18.0	14.5	5	21.20	●
* The given dimension is out of norm											



Form B

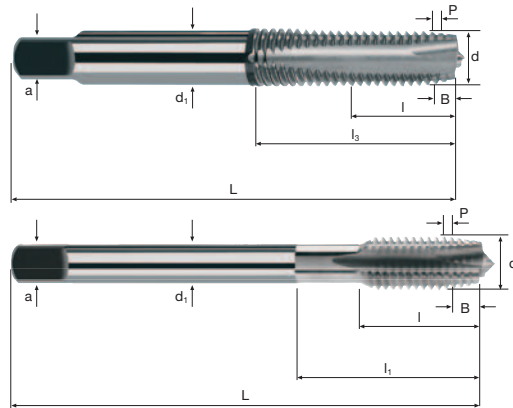

Form B

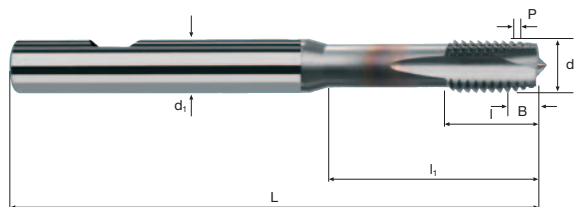

M

GG(G)
Aluminium

www.fraisa.com

Incool




M

**ISO 2
(6H)**



**HSS
PM/F**

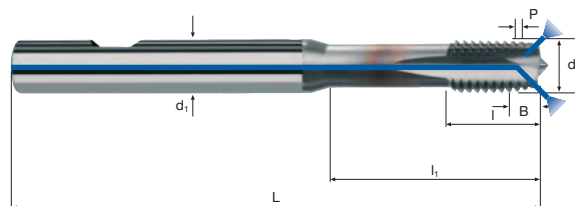

M

Rm

< 850

Rm

850-1100


Inox

Stainless

GG(G)


Aluminium

[illegible]

Application	Material									
	Steel < 500 N/mm ²	M	ø [mm]	P [mm]	v_c 1.0 x d	n [min ⁻¹]	v_c 1.5 x d	n [min ⁻¹]	v_c 2.0 x d	n [min ⁻¹]
		M 3	3.0	0.50	25	2655	22	2335	15	1590
		M 4	4.0	0.70	25	1990	22	1750	15	1195
		M 5	5.0	0.80	25	1590	22	1400	15	955
		M 6	6.0	1.00	25	1325	22	1165	15	795
		M 8	8.0	1.25	25	995	22	875	15	595
		M10	10.0	1.50	25	795	22	700	15	475
		M12	12.0	1.75	25	665	22	585	15	400
		M16	16.0	2.00	25	495	22	440	15	300
		M20	20.0	2.50	25	400	22	350	15	240
	Steel 500 - 850 N/mm ²	M 3	3.0	0.50	22	2335	20	2120	12	1275
		M 4	4.0	0.70	22	1750	20	1590	12	955
		M 5	5.0	0.80	22	1400	20	1275	12	765
		M 6	6.0	1.00	22	1165	20	1060	12	635
		M 8	8.0	1.25	22	875	20	795	12	475
		M10	10.0	1.50	22	700	20	635	12	380
		M12	12.0	1.75	22	585	20	530	12	320
		M16	16.0	2.00	22	440	20	400	12	240
		M20	20.0	2.50	22	350	20	320	12	190
	Steel 850 - 1100 N/mm ²	M 3	3.0	0.50	18	1910	12	1275	8	850
		M 4	4.0	0.70	18	1430	12	955	8	635
		M 5	5.0	0.80	18	1145	12	765	8	510
		M 6	6.0	1.00	18	955	12	635	8	425
		M 8	8.0	1.25	18	715	12	475	8	320
		M10	10.0	1.50	18	575	12	380	8	255
		M12	12.0	1.75	18	475	12	320	8	210
		M16	16.0	2.00	18	360	12	240	8	160
		M20	20.0	2.50	18	285	12	190	8	125
	Cast iron GG(G)	M 3	3.0	0.50	18	1910	15	1590	12	1275
		M 4	4.0	0.70	18	1430	15	1195	12	955
		M 5	5.0	0.80	18	1145	15	955	12	765
		M 6	6.0	1.00	18	955	15	795	12	635
		M 8	8.0	1.25	18	715	15	595	12	475
		M10	10.0	1.50	18	575	15	475	12	380
		M12	12.0	1.75	18	475	15	400	12	320
		M16	16.0	2.00	18	360	15	300	12	240
		M20	20.0	2.50	18	285	15	240	12	190

Material									
M	ø [mm]	P [mm]	v_c 1.0 x d	n [min ⁻¹]	v_c 1.5 x d	n [min ⁻¹]	v_c 2.0 x d	n [min ⁻¹]	
Stainless steel [Cr-Ni/1.4301] 	M 3	3.0	0.50	4	425	3	320	2	210
	M 4	4.0	0.70	4	320	3	240	2	160
	M 5	5.0	0.80	4	255	3	190	2	125
	M 6	6.0	1.00	4	210	3	160	2	105
	M 8	8.0	1.25	4	160	3	120	2	80
	M10	10.0	1.50	4	125	3	95	2	65
	M12	12.0	1.75	4	105	3	80	2	55
	M16	16.0	2.00	4	80	3	60	2	40
	M20	20.0	2.50	4	65	3	50	2	30
Wrought aluminium alloys Si < 6% hardened	M 3	3.0	0.50	12	1275	10	1060	8	850
	M 4	4.0	0.70	12	955	10	795	8	635
	M 5	5.0	0.80	12	765	10	635	8	510
	M 6	6.0	1.00	12	635	10	530	8	425
	M 8	8.0	1.25	12	475	10	400	8	320
	M10	10.0	1.50	12	380	10	320	8	255
	M12	12.0	1.75	12	320	10	265	8	210
	M16	16.0	2.00	12	240	10	200	8	160
	M20	20.0	2.50	12	190	10	160	8	125

Form C

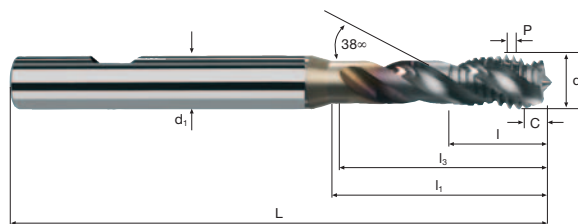

M

GG(G)
Aluminium

www.fraisa.com

Incool




M

**ISO 2
(6H)**



**HSS
PM/F**

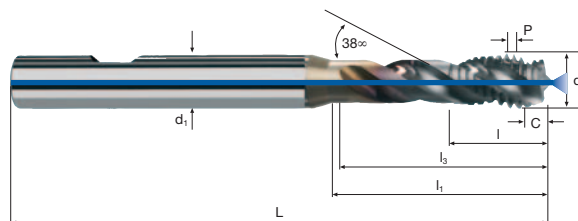

M

Rm

< 850

Rm

850-1100

Inox

Stainless

GG(G)

Aluminium

[illegible]

Taps u-tap




M **ISO 2 (6H)**

HSS-E Co5

DIN 371


Form B

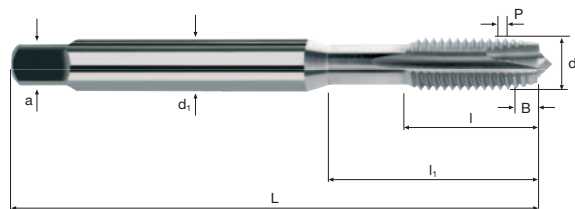

M

Rm < 850 **Inox Stainless** **GG(G) Aluminium Copper**

Example: Order-N°. Article-N°. E10800 Ø-Code .010										VAP	
										E10800	EV10800
Ø Code	d	P	L	I	I1	d1	a				
.010	M 1	0.25	40	5.5	—	2.5	2.1	2	0.80 *	●	●
.012	M 1.2	0.25	40	5.5	—	2.5	2.1	2	1.00	●	●
.020	M 1.4	0.30	40	7.0	—	2.5	2.1	2	1.15 *	●	●
.022	M 1.6	0.35	40	8.0	—	2.5	2.1	2	1.30	●	●
.024	M 1.7	0.35	40	8.0	—	2.5	2.1	2	1.40	●	●
.026	M 1.8	0.35	40	8.0	—	2.5	2.1	2	1.50	●	●
.034	M 2	0.40	45	8.0	—	2.8	2.1	2	1.60	●	●
.036	M 2.2	0.45	45	9.0	—	2.8	2.1	2	1.75	●	●
.038	M 2.3	0.40	45	9.0	—	2.8	2.1	2	1.90	●	●
.040	M 2.5	0.45	50	9.0	—	2.8	2.1	2	2.05	●	●
.042	M 2.6	0.45	50	9.0	—	2.8	2.1	2	2.15	●	●
.044	M 3	0.50	56	12.0	18.0	3.5	2.7	3	2.50	●	●
.056	M 3.5	0.60	56	12.0	20.0	4.0	3.0	3	2.90	●	●
.058	M 4	0.70	63	13.0	21.0	4.5	3.4	3	3.30	●	●
.061	M 4.5	0.75	70	14.0	25.0	6.0	4.9	3	3.75	●	●
.084	M 5	0.80	70	15.0	25.0	6.0	4.9	3	4.20	●	●
.088	M 6	1.00	80	17.0	30.0	6.0	4.9	3	5.00	●	●
.089	M 7	1.00	80	17.0	30.0	7.0	6.2	3	6.00	●	●
.160	M 8	1.25	90	20.0	35.0	8.0	6.2	3	6.80	●	●
.174	M10	1.50	100	22.0	39.0	10.0	8.0	3	8.50	●	●
≤ M1.4 Tolerance ISO 1 (4H)											
* The given dimension is out of norm											
For larger dimensions see article no. E10801, page 213											

Application	Material	M	ø [mm]	P [mm]	V _c 1.5 x d [min ⁻¹]	n [100%]	V _c 2.0 x d [min ⁻¹]	n [100%]	V _c 3.0 x d [min ⁻¹]	n [100%]	V _f [100%]			
	Steel < 500 N/mm ²	M12	12.0	1.75	18	475	831	15	400	700	12	320	560	
		M14	14.0	2.00	18	410	820	15	340	680	12	275	550	
		M16	16.0	2.00	18	360	720	15	300	600	12	240	480	
		M18	18.0	2.50	18	320	800	15	265	663	12	210	525	
		M20	20.0	2.50	18	285	713	15	240	600	12	190	475	
		M22	22.0	2.50	18	260	650	15	215	538	12	175	438	
		M24	24.0	3.00	18	240	720	15	200	600	12	160	480	
	Steel 500 - 850 N/mm ²	M12	12.0	1.75	15	400	700	10	265	464	8	210	368	
		M14	14.0	2.00	15	340	680	10	225	450	8	180	360	
		M16	16.0	2.00	15	300	600	10	200	400	8	160	320	
		M18	18.0	2.50	15	265	663	10	175	438	8	140	350	
		M20	20.0	2.50	15	240	600	10	160	400	8	125	313	
		M22	22.0	2.50	15	215	538	10	145	363	8	115	288	
		M24	24.0	3.00	15	200	600	10	135	405	8	105	315	
	Wrought aluminium alloys Si < 6% hardened	M12	12.0	1.75	15	400	700	12	320	560	10	265	464	
		M14	14.0	2.00	15	340	680	12	275	550	10	225	450	
		M16	16.0	2.00	15	300	600	12	240	480	10	200	400	
		M18	18.0	2.50	15	265	663	12	210	525	10	175	438	
		M20	20.0	2.50	15	240	600	12	190	475	10	160	400	
		M22	22.0	2.50	15	215	538	12	175	438	10	145	363	
		M24	24.0	3.00	15	200	600	12	160	480	10	135	405	
	Recommendation: uncoated													
	Stainless steel [Cr-Ni/1.4301]	M12	2.6	0.45	5	610	275	4	490	221	3	365	164	
		M14	3.0	0.50	5	530	265	4	425	213	3	320	160	
		M16	3.5	0.60	5	455	273	4	365	219	3	275	165	
		M18	4.0	0.70	5	400	280	4	320	224	3	240	168	
		M20	4.5	0.75	5	355	266	4	285	214	3	210	158	
		M22	5.0	0.80	5	320	256	4	255	204	3	190	152	
		M24	6.0	1.00	5	265	265	4	210	210	3	160	160	

Taps u-tap




M

ISO 2
(6H)

HSS-E
Co5

X - P
Form C

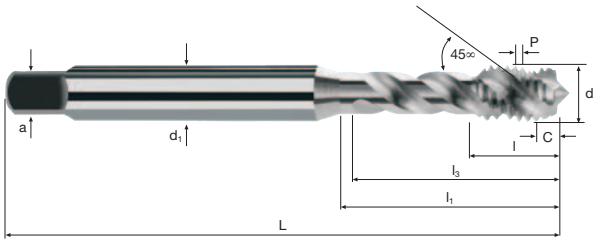

M

Rm
< 850

Inox
Stainless

GG(G)
Aluminium
Copper

Example: Order-N°. Article-N°. E10820 Ø-Code .022												VAP
											E10820	EV10820
Ø Code	d	P	L	l	l ₁	l ₃	d ₁	a				
.022	M 1.6	0.35	40	8.0	—	9.0	2.5	2.1	3	1.30	●	●
.024	M 1.7	0.35	40	8.0	—	9.0	2.5	2.1	3	1.40	●	●
.026	M 1.8	0.35	40	8.0	—	9.0	2.5	2.1	3	1.50	●	●
.034	M 2	0.40	45	8.0	—	10.5	2.8	2.1	3	1.60	●	●
.036	M 2.2	0.45	45	9.0	—	12.5	2.8	2.1	3	1.75	●	●
.038	M 2.3	0.40	45	9.0	—	12.5	2.8	2.1	3	1.90	●	●
.040	M 2.5	0.45	50	9.0	—	13.0	2.8	2.1	3	2.05	●	●
.042	M 2.6	0.45	50	9.0	—	13.0	2.8	2.1	3	2.15	●	●
.044	M 3	0.50	56	4.0	18.0	16.0	3.5	2.7	3	2.50	●	●
.056	M 3.5	0.60	56	4.8	20.0	18.0	4.0	3.0	3	2.90	●	●
.058	M 4	0.70	63	5.6	21.0	19.0	4.5	3.4	3	3.30	●	●
.061	M 4.5	0.75	70	6.0	25.0	23.0	6.0	4.9	3	3.75	●	●
.084	M 5	0.80	70	6.4	25.0	23.0	6.0	4.9	3	4.20	●	●
.088	M 6	1.00	80	8.0	30.0	28.0	6.0	4.9	3	5.00	●	●
.089	M 7	1.00	80	8.0	30.0	28.0	7.0	6.2	3	6.00	●	●
.160	M 8	1.25	90	10.0	35.0	33.0	8.0	6.2	3	6.80	●	●
.174	M10	1.50	100	12.0	39.0	37.0	10.0	8.0	3	8.50	●	●
For larger dimensions see article no. E10821, page 217												

Taps u-tap




M

ISO 2
(6H)

HSS-E
Co5

Form C

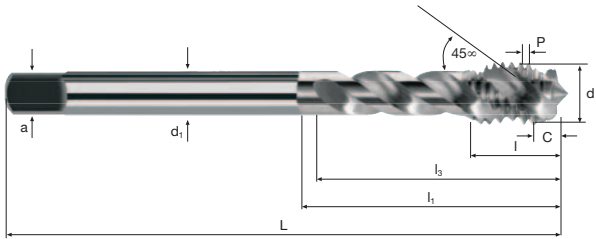


M

Rm
< 850

Inox
Stainless

GG(G)
Aluminium
Copper

Example: Order-N°. Article-N°. E10821 Ø-Code .240												VAP
											E10821	EV10821
Ø Code	d	P	L	l	l ₁	l ₃	d ₁	a				
.240	M12	1.75	110	14	50	48	9	7.0	3	10.20	●	●
.244	M14	2.00	110	16	58	56	11	9.0	4	12.00	●	●
.246	M16	2.00	110	16	58	56	12	9.0	4	14.00	●	●
.312	M18	2.50	125	20	65	63	14	11.0	4	15.50	●	●
.314	M20	2.50	140	20	72	70	16	12.0	4	17.50	●	●
.316	M22	2.50	140	20	72	70	18	14.5	4	19.50	●	●
.320	M24	3.00	160	24	74	72	18	14.5	4	21.00	●	●
.322	M27	3.00	160	30	84	82	20	16.0	4	24.00	●	●
.374	M30	3.50	180	35	92	90	22	18.0	4	26.50	●	●
.376	M33	3.50	180	35	100	98	25	20.0	4	29.50	●	●
.378	M36	4.00	200	40	101	99	28	22.0	4	32.00	●	●
.380	M39	4.00	200	40	101	99	32	24.0	4	35.00	●	●
.382	M42	4.50	200	45	106	104	32	24.0	4	37.50	●	●

Application	Material	M	ø	P	v_c	n	v_f	v_c	n	v_f	v_c	n	v_f
			[mm]	[mm]	$1.5 \times d$	[min ⁻¹]	[100%]	$2.0 \times d$	[min ⁻¹]	[100%]	$3.0 \times d$	[min ⁻¹]	[100%]
	Steel < 500 N/mm ²	M 3	3.0	0.50	8	850	425	6	635	318	4	425	213
		M 4	4.0	0.70	8	635	445	6	475	333	4	320	224
		M 5	5.0	0.80	8	510	408	6	380	304	4	255	204
		M 6	6.0	1.00	8	425	425	6	320	320	4	210	210
		M 8	8.0	1.25	8	320	400	6	240	300	4	160	200
		M10	10.0	1.50	8	255	383	6	190	285	4	125	188
	Steel 500 - 850 N/mm ²	M 3	3.0	0.50	5	530	265	4	425	213	3	320	160
		M 4	4.0	0.70	5	400	280	4	320	224	3	240	168
		M 5	5.0	0.80	5	320	256	4	255	204	3	190	152
		M 6	6.0	1.00	5	265	265	4	210	210	3	160	160
		M 8	8.0	1.25	5	200	250	4	160	200	3	120	150
		M10	10.0	1.50	5	160	240	4	125	188	3	95	143
	Wrought aluminium alloys Si < 6% hardened	M 3	3.0	0.50	8	850	425	6	635	318	4	425	213
		M 4	4.0	0.70	8	635	445	6	475	333	4	320	224
		M 5	5.0	0.80	8	510	408	6	380	304	4	255	204
		M 6	6.0	1.00	8	425	425	6	320	320	4	210	210
		M 8	8.0	1.25	8	320	400	6	240	300	4	160	200
		M10	10.0	1.50	8	255	383	6	190	285	4	125	188
	Cast iron GG(G)	M 3	3.0	0.50	12	1275	638	10	1060	530	8	850	425
		M 4	4.0	0.70	12	955	669	10	795	557	8	635	445
		M 5	5.0	0.80	12	765	612	10	635	508	8	510	408
		M 6	6.0	1.00	12	635	635	10	530	530	8	425	425
		M 8	8.0	1.25	12	475	594	10	400	500	8	320	400
		M10	10.0	1.50	12	380	570	10	320	480	8	255	383

Special long execution



M


**ISO 2
(6H)**



**HSS
PM/F**




Form B

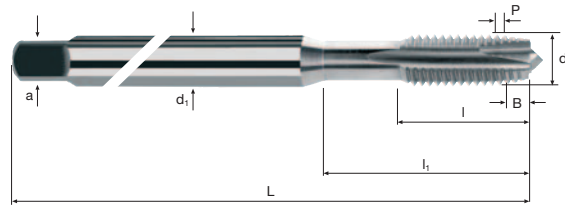

M

Rm
< 850

GG(G)
Aluminium[illegible]

Application	Material									
	Steel < 500 N/mm ²	M	ø	P	v _c	n	v _f	v _c	n	v _f
			[mm]	[mm]	1.0 x d	[min ⁻¹]	[100%]	1.5 x d	[min ⁻¹]	[100%]
		M 3	3.0	0.50	8	850	425	6	635	318
		M 4	4.0	0.70	8	635	445	6	475	333
		M 5	5.0	0.80	8	510	408	6	380	304
		M 6	6.0	1.00	8	425	425	6	320	320
		M 8	8.0	1.25	8	320	400	6	240	300
		M10	10.0	1.50	8	255	383	6	190	285
	Steel 500 - 850 N/mm ²	M 3	3.0	0.50	5	530	265	4	425	213
		M 4	4.0	0.70	5	400	280	4	320	224
		M 5	5.0	0.80	5	320	256	4	255	204
		M 6	6.0	1.00	5	265	265	4	210	210
		M 8	8.0	1.25	5	200	250	4	160	200
		M10	10.0	1.50	5	160	240	4	125	188
	Wrought aluminium alloys Si < 6% hardened	M 3	3.0	0.50	8	850	425	6	635	318
		M 4	4.0	0.70	8	635	445	6	475	333
		M 5	5.0	0.80	8	510	408	6	380	304
		M 6	6.0	1.00	8	425	425	6	320	320
		M 8	8.0	1.25	8	320	400	6	240	300
		M10	10.0	1.50	8	255	383	6	190	285
	Cast iron GG(G)	M 3	3.0	0.50	12	1275	638	10	1060	530
		M 4	4.0	0.70	12	955	669	10	795	557
		M 5	5.0	0.80	12	765	612	10	635	508
		M 6	6.0	1.00	12	635	635	10	530	530
		M 8	8.0	1.25	12	475	594	10	400	500
		M10	10.0	1.50	12	380	570	10	320	480

Special long execution



M


**ISO 2
(6H)**



**HSS
PM/F**



Form C

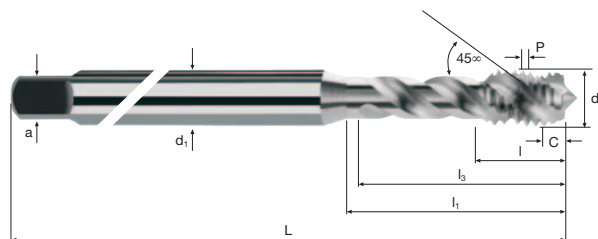

M

Rm
< 850

GG(G)
Aluminium[illegible]




M-LH

ISO 2
(6H)

HSS-E
Co5

Form B

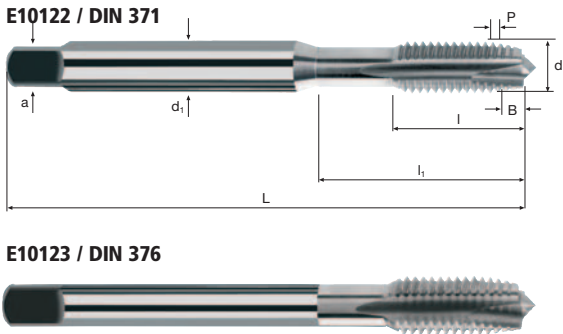

Rm
< 850

Inox
Stainless

GG(G)
Aluminium
Copper

Example: Order-N°.											Article-N°.		ø-Code			
											E10122		.034			
ø Code	d	P		L	l	l ₁	d ₁	a								
.034	M 2	0.40	LH	45	8.0	—	2.8	2.1	2	1.60	●					
.040	M 2.5	0.45	LH	50	9.0	—	2.8	2.1	2	2.05	●					
.044	M 3	0.50	LH	56	12.0	18.0	3.5	2.7	3	2.50	●					
.058	M 4	0.70	LH	63	13.0	21.0	4.5	3.4	3	3.30	●					
.084	M 5	0.80	LH	70	15.0	25.0	6.0	4.9	3	4.20	●					
.088	M 6	1.00	LH	80	17.0	30.0	6.0	4.9	3	5.00	●					
.160	M 8	1.25	LH	90	20.0	35.0	8.0	6.2	3	6.80	●					
.174	M10	1.50	LH	100	22.0	39.0	10.0	8.0	3	8.50	●					

Example: Order-N°.											Article-N°.		ø-Code			
											E10123		.240			
ø Code	d	P		L	l	l ₁	d ₁	a								
.240	M12	1.75	LH	110	24.0	40.0	9.0	7.0	3	10.20	●					
.246	M16	2.00	LH	110	27.0	40.0	12.0	9.0	3	14.00	●					
.314	M20	2.50	LH	140	32.0	50.0	16.0	12.0	4	17.50	●					
.320	M24	3.00	LH	160	34.0	60.0	18.0	14.5	4	21.00	●					

Taps




M-LH

ISO 2
(6H)

HSS-E
Co5

Form C

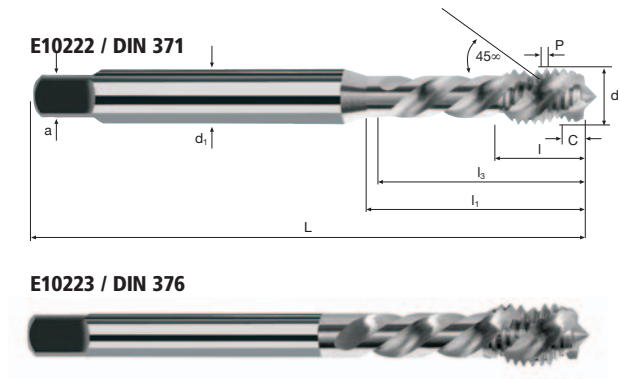

Rm
< 850

Inox
Stainless

GG(G)
Aluminium
Copper

Example: Order-N°.												Article-N°.		ø-Code		E10222	
												E10222		.034			
Ø Code	d	P		L	l	l1	l3	d1	a								
.034	M 2	0.40	LH	45	8.0	—	10.5	2.8	2.1	3	1.60	●					
.040	M 2.5	0.45	LH	50	9.0	—	13.0	2.8	2.1	3	2.05	●					
.044	M 3	0.50	LH	56	4.0	18.0	16.0	3.5	2.7	3	2.50	●					
.058	M 4	0.70	LH	63	5.6	21.0	19.0	4.5	3.4	3	3.30	●					
.084	M 5	0.80	LH	70	6.4	25.0	23.0	6.0	4.9	3	4.20	●					
.088	M 6	1.00	LH	80	8.0	30.0	28.0	6.0	4.9	3	5.00	●					
.160	M 8	1.25	LH	90	10.0	35.0	33.0	8.0	6.2	3	6.80	●					
.174	M10	1.50	LH	100	12.0	39.0	37.0	10.0	8.0	3	8.50	●					

Example: Order-N°.												Article-N°.		ø-Code		E10223	
												E10223		.240			
Ø Code	d	P		L	l	l1	l3	d1	a								
.240	M12	1.75	LH	110	14.0	50.0	48.0	9.0	7.0	3	10.20	●					
.246	M16	2.00	LH	110	16.0	58.0	56.0	12.0	9.0	4	14.00	●					
.314	M20	2.50	LH	140	20.0	72.0	70.0	16.0	12.0	4	17.50	●					
.320	M24	3.00	LH	160	24.0	74.0	72.0	18.0	14.5	4	21.00	●					




M

ISO 2
+0.1

HSS-E
Co5

DIN
371/376

Form B

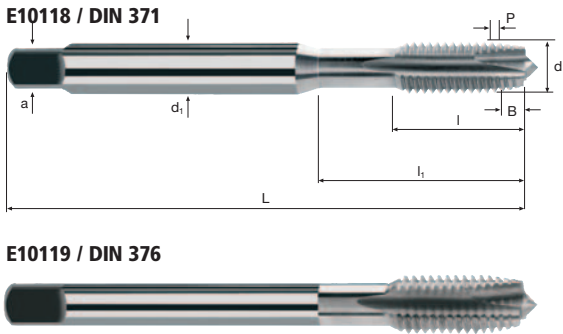


Rm
< 850

Inox
Stainless

GG(G)
Aluminium
Copper

Example: Order-Nº. Article-Nº. ø-Code E10118 .034										E10118	
Ø Code	d	P	L	l	l1	d1	a		Δ		
.034	M 2	0.40	45	8	—	2.8	2.1	2	+0.100	●	
.040	M 2.5	0.45	50	9	—	2.8	2.1	2	+0.100	●	
.044	M 3	0.50	56	12	18.0	3.5	2.7	3	+0.100	●	
.058	M 4	0.70	63	13	21.0	4.5	3.4	3	+0.100	●	
.084	M 5	0.80	70	15	25.0	6.0	4.9	3	+0.100	●	
.088	M 6	1.00	80	17	30.0	6.0	4.9	3	+0.100	●	
.160	M 8	1.25	90	20	35.0	8.0	6.2	3	+0.100	●	
.174	M10	1.50	100	22	39.0	10.0	8.0	3	+0.100	●	

Example: Order-Nº. Article-Nº. ø-Code E10119 .240										E10119	
Ø Code	d	P	L	l	l1	d1	a		Δ		
.240	M12	1.75	110	24	40.0	9.0	7.0	3	+0.100	●	
.246	M16	2.00	110	27	40.0	12.0	9.0	4	+0.100	●	
.314	M20	2.50	140	32	50.0	16.0	12.0	4	+0.100	●	
.320	M24	3.00	160	34	60.0	18.0	14.5	4	+0.100	●	

Application	Material													
	Steel < 500 N/mm ² Recommendation: adapt ø drillhole according to tolerance	M	ø [mm]	P [mm]	v_c 1.0 x d [min ⁻¹]	n [min ⁻¹]	v_f [100%]	v_c 1.5 x d [min ⁻¹]	n [min ⁻¹]	v_f [100%]	v_c 2.0 x d [min ⁻¹]	n [min ⁻¹]	v_f [100%]	
		M 2	2.0	0.40	12	1910	764	10	1590	636	8	1275	510	
		M 2.5	2.5	0.45	12	1530	689	10	1275	574	8	1020	459	
		M 3	3.0	0.50	14	1485	743	12	1275	638	10	1060	530	
Steel < 500 N/mm ² Recommendation: adapt ø drillhole according to tolerance		M 4	4.0	0.70	14	1115	781	12	955	669	10	795	557	
		M 5	5.0	0.80	14	890	712	12	765	612	10	635	508	
		M 6	6.0	1.00	14	745	745	12	635	635	10	530	530	
		M 8	8.0	1.25	14	555	694	12	475	594	10	400	500	
Steel 500 - 850 N/mm ² Recommendation: adapt ø drillhole according to tolerance		M10	10.0	1.50	14	445	668	12	380	570	10	320	480	
		M12	12.0	1.75	14	370	648	12	320	560	10	265	464	
		M16	16.0	2.00	14	280	560	12	240	480	10	200	400	
		M20	20.0	2.50	14	225	563	12	190	475	10	160	400	
Steel 500 - 850 N/mm ² Recommendation: adapt ø drillhole according to tolerance		M24	24.0	3.00	14	185	555	12	160	480	10	135	405	
Wrought aluminium alloys Si < 6% hardened Recommendation: adapt ø drillhole according to tolerance		M 2	2.0	0.40	7	1115	446	6	955	382	5	795	318	
		M 2.5	2.5	0.45	7	890	401	6	765	344	5	635	286	
		M 3	3.0	0.50	9	955	478	8	850	425	7	745	373	
		M 4	4.0	0.70	9	715	500	8	635	445	7	555	389	
Wrought aluminium alloys Si < 6% hardened Recommendation: adapt ø drillhole according to tolerance		M 5	5.0	0.80	9	575	460	8	510	408	7	445	356	
		M 6	6.0	1.00	9	475	475	8	425	425	7	370	370	
		M 8	8.0	1.25	9	360	450	8	320	400	7	280	350	
		M10	10.0	1.50	9	285	428	8	255	383	7	225	338	
Stainless steel [Cr-Ni/1.4301] Recommendation: adapt ø drillhole according to tolerance		M12	12.0	1.75	9	240	420	8	210	368	7	185	324	
		M16	16.0	2.00	9	180	360	8	160	320	7	140	280	
		M20	20.0	2.50	9	145	363	8	125	313	7	110	275	
		M24	24.0	3.00	9	120	360	8	105	315	7	95	285	
Stainless steel [Cr-Ni/1.4301] Recommendation: adapt ø drillhole according to tolerance														

Taps




M

ISO 2
+0.1

HSS-E
Co5

Form C

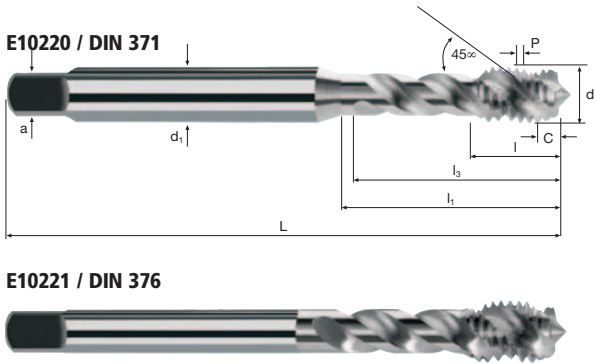

Rm
< 850

Inox
Stainless

GG(G)
Aluminium
Copper

Example: Order-N°.												Article-N°.		ø-Code			
												E10220		.034			
Ø Code	d	P	L	l	l1	l3	d1	a		Δ							
.034	M 2	0.40	45	8.0	—	10.5	2.8	2.1	3	+0.100	●						
.040	M 2.5	0.45	50	9.0	—	13.0	2.8	2.1	3	+0.100	●						
.044	M 3	0.50	56	4.0	18.0	16.0	3.5	2.7	3	+0.100	●						
.058	M 4	0.70	63	5.6	21.0	19.0	4.5	3.4	3	+0.100	●						
.084	M 5	0.80	70	6.4	25.0	23.0	6.0	4.9	3	+0.100	●						
.088	M 6	1.00	80	8.0	30.0	28.0	6.0	4.9	3	+0.100	●						
.160	M 8	1.25	90	10.0	35.0	33.0	8.0	6.2	3	+0.100	●						
.174	M10	1.50	100	12.0	39.0	37.0	10.0	8.0	3	+0.100	●						

Example: Order-N°.												Article-N°.		ø-Code			
												E10221		.240			
Ø Code	d	P	L	l	l1	l3	d1	a		Δ							
.240	M12	1.75	110	14.0	50.0	48.0	9.0	7.0	3	+0.100	●						
.246	M16	2.00	110	16.0	58.0	56.0	12.0	9.0	4	+0.100	●						
.314	M20	2.50	140	20.0	72.0	70.0	16.0	12.0	4	+0.100	●						
.320	M24	3.00	160	24.0	74.0	72.0	18.0	14.5	4	+0.100	●						


M

ISO 3
(6G)

HSS
PM/F

DIN
371/376


Form B

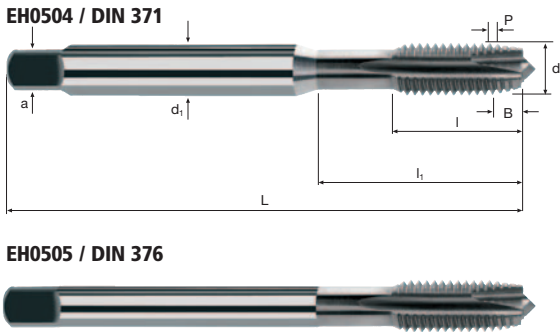

Rm < 850	Rm 850-1100	Rm 1100-1300							
-------------	----------------	-----------------	--	--	--	--	--	--	--

Example: Order-Nº. Article-Nº. EH0504 ø-Code .034										TiCN
Ø Code	d	P	L	I	I1	d1	a		Δ	EH0504
.034	M 2	0.40	45	8	—	2.8	2.1	2	+0.015	●
.040	M 2.5	0.45	50	9	—	2.8	2.1	2	+0.015	●
.044	M 3	0.50	56	12	18.0	3.5	2.7	3	+0.016	●
.058	M 4	0.70	63	13	21.0	4.5	3.4	3	+0.019	●
.084	M 5	0.80	70	15	25.0	6.0	4.9	3	+0.020	●
.088	M 6	1.00	80	17	30.0	6.0	4.9	3	+0.024	●
.160	M 8	1.25	90	20	35.0	8.0	6.2	3	+0.025	●
.174	M10	1.50	100	22	39.0	10.0	8.0	3	+0.028	●

Example: Order-Nº. Article-Nº. EH0505 ø-Code .240										TiCN
Ø Code	d	P	L	I	I1	d1	a		Δ	EH0505
.240	M 12	1.75	110	24	40.0	9.0	7.0	3	+0.032	●
.246	M 16	2.00	110	27	40.0	12.0	9.0	3	+0.034	●
.314	M 20	2.50	140	32	50.0	16.0	12.0	4	+0.036	●
.320	M 24	3.00	160	34	60.0	18.0	14.5	4	+0.042	●

Application	Material	M	ø [mm]	P [mm]	V _c 1.0 x d [min ⁻¹]	n [100%]	V _c 1.5 x d [min ⁻¹]	n [100%]	V _f [100%]	V _c 2.0 x d [min ⁻¹]	n [100%]	V _f [100%]	
	Steel 500 - 850 N/mm ²	M 2	2.0	0.40	32	5095	2038	28	4455	1782	22	3500	1400
		M 2.5	2.5	0.45	32	4075	1834	28	3565	1604	22	2800	1260
		M 3	3.0	0.50	32	3395	1698	28	2970	1485	22	2335	1168
		M 4	4.0	0.70	32	2545	1782	28	2230	1561	22	1750	1225
		M 5	5.0	0.80	32	2035	1628	28	1785	1428	22	1400	1120
		M 6	6.0	1.00	32	1700	1700	28	1485	1485	22	1165	1165
		M 8	8.0	1.25	32	1275	1594	28	1115	1394	22	875	1094
		M10	10.0	1.50	32	1020	1530	28	890	1335	22	700	1050
		M12	12.0	1.75	32	850	1488	28	745	1304	22	585	1024
		M16	16.0	2.00	32	635	1270	28	555	1110	22	440	880
		M20	20.0	2.50	32	510	1275	28	445	1113	22	350	875
		M24	24.0	3.00	32	425	1275	28	370	1110	22	290	870
Steel 500 - 850 N/mm ²													
Steel 850 - 1100 N/mm ²		M 2	2.0	0.40	20	3185	1274	16	2545	1018	10	1590	636
		M 2.5	2.5	0.45	20	2545	1145	16	2035	916	10	1275	574
		M 3	3.0	0.50	20	2120	1060	16	1700	850	10	1060	530
		M 4	4.0	0.70	20	1590	1113	16	1275	893	10	795	557
		M 5	5.0	0.80	20	1275	1020	16	1020	816	10	635	508
		M 6	6.0	1.00	20	1060	1060	16	850	850	10	530	530
		M 8	8.0	1.25	20	795	994	16	635	794	10	400	500
		M10	10.0	1.50	20	635	953	16	510	765	10	320	480
		M12	12.0	1.75	20	530	928	16	425	744	10	265	464
		M16	16.0	2.00	20	400	800	16	320	640	10	200	400
		M20	20.0	2.50	20	320	800	16	255	638	10	160	400
		M24	24.0	3.00	20	265	795	16	210	630	10	135	405


M

ISO 3
(6G)

HSS
PM/F

DIN
371/376

Form C

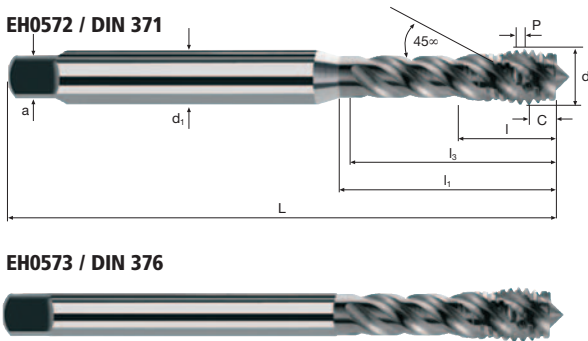

Rm < 850	Rm 850-1100										
-------------	----------------	--	--	--	--	--	--	--	--	--	--


Example: Order-Nº.											TiCN
Article-Nº. ø-Code											EH0572
ø Code	d	P	L	l	l1	l3	d1	a		Δ	
.034	M 2	0.40	45	8	—	10.5	2.8	2.1	3	+0.015	●
.040	M 2.5	0.45	50	9	—	13.0	2.8	2.1	3	+0.015	●
.044	M 3	0.50	56	5	—	16.0	3.5	2.7	3	+0.016	●
.058	M 4	0.70	63	7	—	19.0	4.5	3.4	3	+0.019	●
.084	M 5	0.80	70	8	—	23.0	6.0	4.9	3	+0.020	●
.088	M 6	1.00	80	10	—	28.0	6.0	4.9	3	+0.024	●
.160	M 8	1.25	90	13	35.0	33.0	8.0	6.2	3	+0.025	●
.174	M10	1.50	100	15	39.0	37.0	10.0	8.0	4	+0.028	●

Example: Order-Nº.											TiCN
Article-Nº. ø-Code											EH0573
ø Code	d	P	L	l	l1	l3	d1	a		Δ	
.240	M12	1.75	110	18	50.0	48.0	9.0	7.0	4	+0.032	●
.246	M16	2.00	110	20	58.0	56.0	12.0	9.0	4	+0.034	●
.314	M20	2.50	140	25	72.0	70.0	16.0	12.0	4	+0.036	●
.320	M24	3.00	160	30	74.0	72.0	18.0	14.5	5	+0.042	●

Application	Material	M	ø	P	v_c	n	v_f	v_c	n	v_f	v_c	n	v_f
		[mm]	[mm]		1.5 x d	[min ⁻¹]	[100%]	2.0 x d	[min ⁻¹]	[100%]	3.0 x d	[min ⁻¹]	[100%]
	Steel < 500 N/mm ²	M 2	2.0	0.40	14	2230	892	12	1910	764	10	1590	636
		M 2.5	2.5	0.45	14	1785	803	12	1530	689	10	1275	574
		M 3	3.0	0.50	18	1910	955	15	1590	795	12	1275	638
		M 4	4.0	0.70	18	1430	1001	15	1195	837	12	955	669
		M 5	5.0	0.80	18	1145	916	15	955	764	12	765	612
		M 6	6.0	1.00	18	955	955	15	795	795	12	635	635
		M 8	8.0	1.25	18	715	894	15	595	744	12	475	594
		M10	10.0	1.50	18	575	863	15	475	713	12	380	570
	Steel 500 - 850 N/mm ²	M 2	2.0	0.40	12	1910	764	8	1275	510	6	955	382
		M 2.5	2.5	0.45	12	1530	689	8	1020	459	6	765	344
		M 3	3.0	0.50	15	1590	795	10	1060	530	8	850	425
		M 4	4.0	0.70	15	1195	837	10	795	557	8	635	445
		M 5	5.0	0.80	15	955	764	10	635	508	8	510	408
		M 6	6.0	1.00	15	795	795	10	530	530	8	425	425
		M 8	8.0	1.25	15	595	744	10	400	500	8	320	400
		M10	10.0	1.50	15	475	713	10	320	480	8	255	383
	Wrought aluminium alloys Si < 6% hardened	M 2	2.0	0.40	12	1910	764	10	1590	636	8	1275	510
		M 2.5	2.5	0.45	12	1530	689	10	1275	574	8	1020	459
		M 3	3.0	0.50	15	1590	795	12	1275	638	10	1060	530
		M 4	4.0	0.70	15	1195	837	12	955	669	10	795	557
		M 5	5.0	0.80	15	955	764	12	765	612	10	635	508
		M 6	6.0	1.00	15	795	795	12	635	635	10	530	530
		M 8	8.0	1.25	15	595	744	12	475	594	10	400	500
		M10	10.0	1.50	15	475	713	12	380	570	10	320	480
Stainless steel [Cr-Ni/1.4301] 		M 2	2.0	0.40	4	635	254	3	475	190	2	320	128
		M 2.5	2.5	0.45	4	510	230	3	380	171	2	255	115
		M 3	3.0	0.50	5	530	265	4	425	213	3	320	160
		M 4	4.0	0.70	5	400	280	4	320	224	3	240	168
		M 5	5.0	0.80	5	320	256	4	255	204	3	190	152
		M 6	6.0	1.00	5	265	265	4	210	210	3	160	160
		M 8	8.0	1.25	5	200	250	4	160	200	3	120	150
		M10	10.0	1.50	5	160	240	4	125	188	3	95	143

Application	Material									
	Steel < 500 N/mm ²	M	ø	P	v _c	n	v _f	v _c	n	v _f
		[mm]	[mm]		1.0 x d	[min ⁻¹]	[100%]	1.5 x d	[min ⁻¹]	[100%]
		M 2	2.0	0.40	11	1750	700	10	1590	636
		M 2.5	2.5	0.45	11	1400	630	10	1275	574
		M 3	3.0	0.50	14	1485	743	12	1275	638
		M 4	4.0	0.70	14	1115	781	12	955	669
		M 5	5.0	0.80	14	890	712	12	765	612
		M 6	6.0	1.00	14	745	745	12	635	635
		M 8	8.0	1.25	14	555	694	12	475	594
		M10	10.0	1.50	14	445	668	12	380	570
	Steel 500 - 850 N/mm ²	M 2	2.0	0.40	7	1115	446	6	955	382
		M 2.5	2.5	0.45	7	890	401	6	765	344
		M 3	3.0	0.50	9	955	478	8	850	425
		M 4	4.0	0.70	9	715	500	8	635	445
		M 5	5.0	0.80	9	575	460	8	510	408
		M 6	6.0	1.00	9	475	475	8	425	425
		M 8	8.0	1.25	9	360	450	8	320	400
		M10	10.0	1.50	9	285	428	8	255	383
	Wrought aluminium alloys Si < 6% hardened	M 2	2.0	0.40	8	1275	510	6	955	382
		M 2.5	2.5	0.45	8	1020	459	6	765	344
		M 3	3.0	0.50	10	1060	530	8	850	425
		M 4	4.0	0.70	10	795	557	8	635	445
		M 5	5.0	0.80	10	635	508	8	510	408
		M 6	6.0	1.00	10	530	530	8	425	425
		M 8	8.0	1.25	10	400	500	8	320	400
		M10	10.0	1.50	10	320	480	8	255	383
	Stainless steel [Cr-Ni/1.4301]	M 2	2.0	0.40	3	475	190	2	320	128
		M 2.5	2.5	0.45	3	380	171	2	255	115
		M 3	3.0	0.50	4	425	213	3	320	160
		M 4	4.0	0.70	4	320	224	3	240	168
		M 5	5.0	0.80	4	255	204	3	190	152
		M 6	6.0	1.00	4	210	210	3	160	160
		M 8	8.0	1.25	4	160	200	3	120	150
		M10	10.0	1.50	4	125	188	3	95	143

ISO 1
(4H)

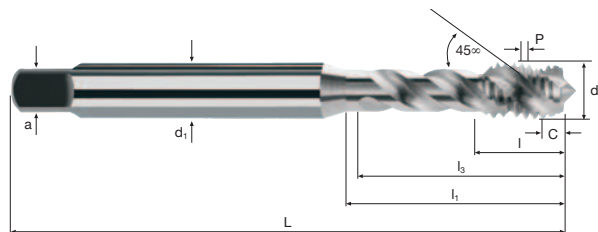

M

Inox
Stainless

GG(G)
Aluminium
Copper

www.fraisa.com




M

7G

HSS-E
Co5

X - P
Form B

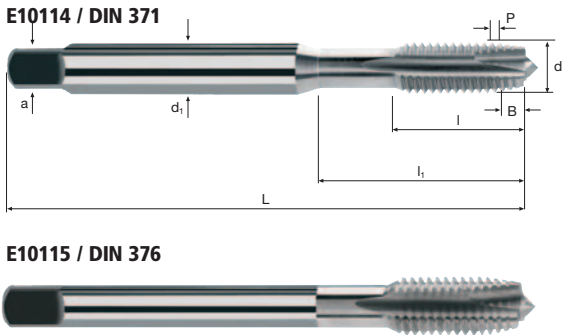

Rm
< 850

Inox
Stainless

GG(G)
Aluminium
Copper

Example: Order-N°.										Article-N°.		ø-Code		E10114	
										E10114		.034			
ø Code	d	P	L	I	I1	d1	a		Δ						
.034	M 2	0.40	45	8	—	2.8	2.1	2	+0.030	●					
.040	M 2.5	0.45	50	9	—	2.8	2.1	2	+0.030	●					
.044	M 3	0.50	56	12	18.0	3.5	2.7	3	+0.032	●					
.058	M 4	0.70	63	13	21.0	4.5	3.4	3	+0.038	●					
.084	M 5	0.80	70	15	25.0	6.0	4.9	3	+0.040	●					
.088	M 6	1.00	80	17	30.0	6.0	4.9	3	+0.048	●					
.160	M 8	1.25	90	20	35.0	8.0	6.2	3	+0.050	●					
.174	M10	1.50	100	22	39.0	10.0	8.0	3	+0.056	●					

Example: Order-N°.										Article-N°.		ø-Code		E10115	
										E10115		.240			
ø Code	d	P	L	I	I1	d1	a		Δ						
.240	M12	1.75	110	24	40.0	9.0	7.0	3	+0.064	●					
.246	M16	2.00	110	27	40.0	12.0	9.0	3	+0.068	●					
.314	M20	2.50	140	32	50.0	16.0	12.0	4	+0.072	●					
.320	M24	3.00	160	34	60.0	18.0	14.5	4	+0.085	●					

Taps




M

7G

HSS-E
Co5

X - P
Form C

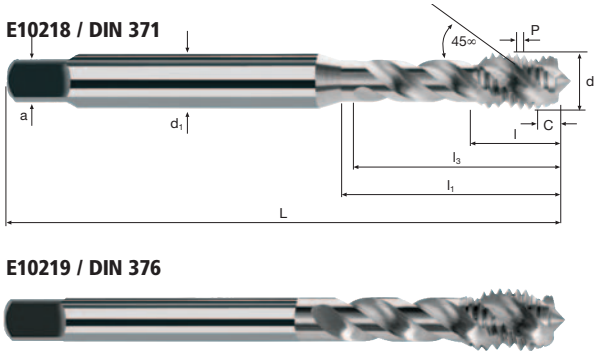

Rm
< 850

Inox
Stainless

GG(G)
Aluminium
Copper

Example: Order-N°.												Article-N°.		ø-Code		E10218	
												E10218		.034			
Ø Code	d	P	L	l	l1	l3	d1	a		Δ							
.034	M 2	0.40	45	8.0	—	10.5	2.8	2.1	3	+0.030	●						
.040	M 2.5	0.45	50	9.0	—	13.0	2.8	2.1	3	+0.030	●						
.044	M 3	0.50	56	4.0	18.0	16.0	3.5	2.7	3	+0.032	●						
.058	M 4	0.70	63	5.6	21.0	19.0	4.5	3.4	3	+0.038	●						
.084	M 5	0.80	70	6.4	25.0	23.0	6.0	4.9	3	+0.040	●						
.088	M 6	1.00	80	8.0	30.0	28.0	6.0	4.9	3	+0.048	●						
.160	M 8	1.25	90	10.0	35.0	33.0	8.0	6.2	3	+0.050	●						
.174	M10	1.50	100	12.0	39.0	37.0	10.0	8.0	3	+0.056	●						

Example: Order-N°.												Article-N°.		ø-Code		E10219	
												E10219		.240			
Ø Code	d	P	L	l	l1	l3	d1	a		Δ							
.240	M12	1.75	110	14.0	50.0	48.0	9.0	7.0	3	+0.064	●						
.246	M16	2.00	110	16.0	58.0	56.0	12.0	9.0	4	+0.068	●						
.314	M20	2.50	140	20.0	72.0	70.0	16.0	12.0	4	+0.072	●						
.320	M24	3.00	160	24.0	74.0	72.0	18.0	14.5	4	+0.085	●						


4H



**HSS
PM/F**



Form B

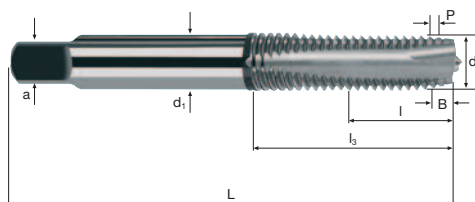

M

Example:
Order-N°.

Article-Nº.

Ø-Code

E0599

.034

E0599[illegible]



Metric fine thread MF

Tolerance ISO 2 (6H)

N° EH1257 / EH1258 x-tap



N° EH1260 / EH1261 x-tap



N° EH6910 / EH6911



N° ET1240 / ET1241 Inotap



N° ET1260 / ET1261 x-tap



N° EH1270 / EH1271



N° EH1229 polytap-R



	HSS PM/F		Rm 850-1100		247
	HSS PM/F		Rm 850-1100		251
	HM MG10		HRC 48- >60		255
	HSS PM/F		Inox Stainless		257
	HSS PM/F		Inox Stainless		261
	HSS PM/F		GG(G) Cast iron		265
	HSS PM/F		Rm <850-1100	Inox Stainless	269

MF

Taps x-tap




MF

ISO 2
(6H)

HSS
PM/F

X - P
Form B

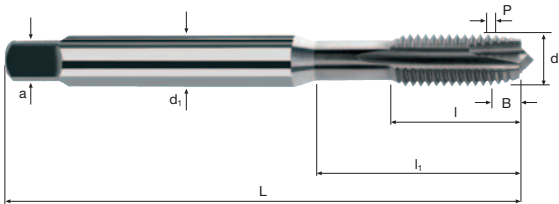

MF

Rm < 850	Rm 850-1100	Rm 1100-1300							
-------------	----------------	-----------------	--	--	--	--	--	--	--

Example: Order-Nº. Article-Nº. EH1257 Ø-Code .029										TiCN
										EH1257
Ø Code	d	P	L	l	l ₁	d ₁	a			
.029	M 2.5	0.35	50	9	—	2.8	2.1	2	2.15	●
.031	M 3	0.35	56	12	18	3.5	2.7	3	2.65	●
.032	M 3.5	0.35	56	12	20	4.0	3.0	3	3.15	●
.046	M 4	0.50	63	13	21	4.5	3.4	3	3.50	●
.048	M 5	0.50	70	15	25	6.0	4.9	3	4.50	●
.050	M 6	0.50	80	17	30	6.0	4.9	3	5.50	●
.052	M 8	0.50	90	20	35	8.0	6.2	3	7.50	●
.054	M10	0.50	100	22	39	10.0	8.0	3	9.50	●
.064	M 6	0.75	80	17	30	6.0	4.9	3	5.20	●
.065	M 7	0.75	80	17	30	7.0	5.5	3	6.20	●
.066	M 8	0.75	90	20	35	8.0	6.2	3	7.20	●
.068	M10	0.75	100	22	39	10.0	8.0	3	9.20	●
.090	M 8	1.00	90	20	35	8.0	6.2	3	7.00	●
.091	M 9	1.00	90	20	35	9.0	7.0	3	8.00	●
.092	M10	1.00	100	22	39	10.0	8.0	3	9.00	●
.162	M10	1.25	100	22	39	10.0	8.0	3	8.80	●
For larger dimensions see article no. EH1258, page 249										

Taps x-tap




MF

ISO 2
(6H)

HSS
PM/F

X - P
Form B

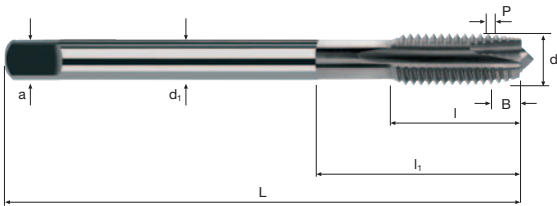


MF

Rm < 850	Rm 850-1100	Rm 1100-1300								
-------------	----------------	-----------------	--	--	--	--	--	--	--	--

Example: Order-Nº. Article-Nº. ø-Code EH1258 .070										TiCN
										EH1258
Ø Code	d	P	L	l	l ₁	d ₁	a			
.070	M12	0.75	100	18	39	9.0	7.0	3	11.30	●
.072	M14	0.75	100	18	39	11.0	9.0	3	13.30	●
.074	M16	0.75	100	18	39	12.0	9.0	3	15.30	●
.094	M12	1.00	100	18	39	9.0	7.0	3	11.00	●
.095	M13	1.00	100	18	39	11.0	7.0	3	12.00	●
.096	M14	1.00	100	18	39	11.0	9.0	3	13.00	●
.097	M15	1.00	100	18	39	12.0	9.0	3	14.00	●
.098	M16	1.00	100	18	39	12.0	9.0	3	15.00	●
.099	M17	1.00	100	18	39	12.0	9.0	4	16.00	●
.100	M18	1.00	110	20	45	14.0	11.0	4	17.00	●
.102	M20	1.00	125	20	50	16.0	12.0	4	19.00	●
.164	M12	1.25	100	22	39	9.0	7.0	3	10.80	●
.166	M14	1.25	100	22	39	11.0	9.0	3	12.80	●
.168	M16	1.25	100	22	39	12.0	9.0	3	14.80	●
.176	M12	1.50	100	22	39	9.0	7.0	3	10.50	●
.178	M14	1.50	100	22	39	11.0	9.0	3	12.50	●
.180	M16	1.50	100	22	39	12.0	9.0	3	14.50	●
.182	M18	1.50	110	22	45	14.0	11.0	4	16.50	●
.184	M20	1.50	125	25	50	16.0	12.0	4	18.50	●
.186	M22	1.50	125	26	50	18.0	14.5	4	20.50	●
.188	M24	1.50	140	27	52	18.0	14.5	4	22.50	●

Application



Material

Steel
500 - 850 N/mm²

Steel
500 - 850 N/mm²

Steel
850 - 1100 N/mm²

Steel
850 - 1100 N/mm²

MF	ø	P	v_c	n	v_f	v_c	n	v_f	v_c	n	v_f
	[mm]	[mm]	$1.0 \times d$	[min ⁻¹]	[100%]	$1.5 \times d$	[min ⁻¹]	[100%]	$2.0 \times d$	[min ⁻¹]	[100%]
M 2.5	2.5	0.35	32	4075	1426	28	3565	1248	22	2800	980
M 3	3.0	0.35	32	3395	1188	28	2970	1040	22	2335	817
M 3.5	3.5	0.35	32	2910	1018	28	2545	891	22	2000	700
M 4	4.0	0.50	32	2545	1273	28	2230	1115	22	1750	875
M 5	5.0	0.50	32	2035	1018	28	1785	893	22	1400	700
M 6	6.0	0.50	32	1700	850	28	1485	743	22	1165	583
M 8	8.0	0.50	32	1275	638	28	1115	558	22	875	438
M10	10.0	0.50	32	1020	510	28	890	445	22	700	350
M 6	6.0	0.75	32	1700	1275	28	1485	1114	22	1165	874
M 7	7.0	0.75	32	1455	1091	28	1275	956	22	1000	750
M 8	8.0	0.75	32	1275	956	28	1115	836	22	875	656
M10	10.0	0.75	32	1020	765	28	890	668	22	700	525
M 8	8.0	1.00	32	1275	1275	28	1115	1115	22	875	875
M 9	9.0	1.00	32	1130	1130	28	990	990	22	780	780
M10	10.0	1.00	32	1020	1020	28	890	890	22	700	700
M10	10.0	1.25	32	1020	1275	28	890	1113	22	700	875
M 2.5	2.5	0.35	20	2545	891	16	2035	712	10	1275	446
M 3	3.0	0.35	20	2120	742	16	1700	595	10	1060	371
M 3.5	3.5	0.35	20	1820	637	16	1455	509	10	910	319
M 4	4.0	0.50	20	1590	795	16	1275	638	10	795	398
M 5	5.0	0.50	20	1275	638	16	1020	510	10	635	318
M 6	6.0	0.50	20	1060	530	16	850	425	10	530	265
M 8	8.0	0.50	20	795	398	16	635	318	10	400	200
M10	10.0	0.50	20	635	318	16	510	255	10	320	160
M 6	6.0	0.75	20	1060	795	16	850	638	10	530	398
M 7	7.0	0.75	20	910	683	16	730	548	10	455	341
M 8	8.0	0.75	20	795	596	16	635	476	10	400	300
M10	10.0	0.75	20	635	476	16	510	383	10	320	240
M 8	8.0	1.00	20	795	795	16	635	635	10	400	400
M 9	9.0	1.00	20	705	705	16	565	565	10	355	355
M10	10.0	1.00	20	635	635	16	510	510	10	320	320
M10	10.0	1.25	20	635	794	16	510	638	10	320	400

Taps x-tap




MF

ISO 2
(6H)

HSS
PM/F

X - P
Form C

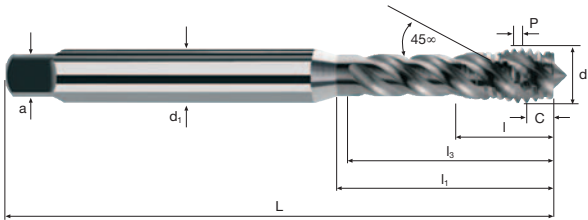

MF

Rm < 850	Rm 850-1100										
-------------	----------------	--	--	--	--	--	--	--	--	--	--

Example: Order-Nº. Article-Nº. Ø-Code EH1260 .029											TiCN
											EH1260
Ø Code	d	P	L	l	l ₁	l ₃	d ₁	a			
.029	M 2.5	0.35	50	9	—	13	2.8	2.1	3	2.15	●
.031	M 3	0.35	56	5	18	16	3.5	2.7	3	2.65	●
.032	M 3.5	0.35	56	6	20	18	4.0	3.0	3	3.15	●
.046	M 4	0.50	63	7	21	19	4.5	3.4	3	3.50	●
.048	M 5	0.50	70	8	25	23	6.0	4.9	3	4.50	●
.050	M 6	0.50	80	10	30	28	6.0	4.9	3	5.50	●
.052	M 8	0.50	90	13	35	33	8.0	6.2	3	7.50	●
.054	M10	0.50	100	15	39	37	10.0	8.0	4	9.50	●
.064	M 6	0.75	80	10	30	28	6.0	4.9	3	5.20	●
.065	M 7	0.75	80	10	30	28	7.0	5.5	3	6.20	●
.066	M 8	0.75	90	13	35	33	8.0	6.2	3	7.20	●
.068	M10	0.75	100	15	39	37	10.0	8.0	4	9.20	●
.090	M 8	1.00	90	13	35	33	8.0	6.2	3	7.00	●
.091	M 9	1.00	90	13	35	33	9.0	7.0	3	8.00	●
.092	M10	1.00	100	15	39	37	10.0	8.0	4	9.00	●
.162	M10	1.25	100	15	39	37	10.0	8.0	4	8.80	●
For larger dimensions see article no. EH1261, page 253											


Taps x-tap



ISO 2
(6H)

HSS
PM/F

X - P
Form C

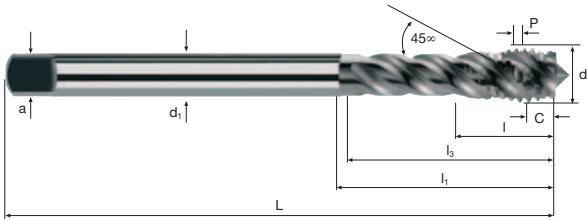

MF

Rm < 850	Rm 850-1100										
-------------	----------------	--	--	--	--	--	--	--	--	--	--

Example: Order-Nº.											TiCN
Article-Nº. ø-Code											EH1261
EH1261 .070											
Ø Code	d	P	L	l	l1	l3	d1	a			
.070	M12	0.75	100	11	39	37	9.0	7.0	4	11.30	●
.072	M14	0.75	100	11	39	37	11.0	9.0	4	13.30	●
.074	M16	0.75	100	12	39	37	12.0	9.0	4	15.30	●
.094	M12	1.00	100	11	39	37	9.0	7.0	4	11.00	●
.095	M13	1.00	100	11	39	37	11.0	9.0	4	12.00	●
.096	M14	1.00	100	11	39	37	11.0	9.0	4	13.00	●
.097	M15	1.00	100	12	39	37	12.0	9.0	4	14.00	●
.098	M16	1.00	100	12	39	37	12.0	9.0	4	15.00	●
.099	M17	1.00	100	12	39	37	12.0	9.0	4	16.00	●
.100	M18	1.00	110	13	50	48	14.0	11.0	4	17.00	●
.102	M20	1.00	125	14	65	63	16.0	12.0	4	19.00	●
.164	M12	1.25	100	15	39	37	9.0	7.0	4	10.80	●
.166	M14	1.25	100	15	39	37	11.0	9.0	4	12.80	●
.168	M16	1.25	100	15	39	37	12.0	9.0	4	14.80	●
.176	M12	1.50	100	15	39	37	9.0	7.0	4	10.50	●
.178	M14	1.50	100	15	39	37	11.0	9.0	4	12.50	●
.180	M16	1.50	100	15	39	37	12.0	9.0	4	14.50	●
.182	M18	1.50	110	17	50	48	14.0	11.0	4	16.50	●
.184	M20	1.50	125	18	65	63	16.0	12.0	4	18.50	●
.186	M22	1.50	125	18	65	63	18.0	14.5	5	20.50	●
.188	M24	1.50	140	20	72	70	18.0	14.5	5	22.50	●

Application	Material	MF	ø [mm]	P [mm]	v_c 1.0 x d	n [min ⁻¹]	v_f [100%]	v_c 1.5 x d	n [min ⁻¹]	v_f [100%]	v_c 2.0 x d	n [min ⁻¹]	v_f [100%]
	Hardened tool steel 48 - 52 HRC	M 6	6.0	0.50	8	425	213	6	320	160	4	210	105
		M 8	8.0	1.00	8	320	320	6	240	240	4	160	160
		M10	10.0	1.00	8	255	255	6	190	190	4	125	125
		M12	12.0	1.50	8	210	315	6	160	240	4	105	158
	Hardened tool steel 52 - 56 HRC	M14	14.0	1.50	8	180	270	6	135	203	4	90	135
		M16	16.0	1.50	8	160	240	6	120	180	4	80	120
	Hardened tool steel 56 - 60 HRC	M 6	6.0	0.50	6	320	160	4	210	105	3	160	80
		M 8	8.0	1.00	6	240	240	4	160	160	3	120	120
		M10	10.0	1.00	6	190	190	4	125	125	3	95	95
		M12	12.0	1.50	6	160	240	4	105	158	3	80	120
	Hardened tool steel > 60 HRC	M14	14.0	1.50	6	135	203	4	90	135	3	70	105
		M16	16.0	1.50	6	120	180	4	80	120	3	60	90

Application	Material	MF	ø [mm]	P [mm]	v_c 1.5 x d	n [min ⁻¹]	v_f [100%]	v_c 2.0 x d	n [min ⁻¹]	v_f [100%]	v_c 3.0 x d	n [min ⁻¹]	v_f [100%]
	Hardened tool steel 48 - 52 HRC	M 6	6.0	0.50	8	425	213	6	320	160	4	210	105
		M 8	8.0	1.00	8	320	320	6	240	240	4	160	160
		M10	10.0	1.00	8	255	255	6	190	190	4	125	125
		M12	12.0	1.50	8	210	315	6	160	240	4	105	158
	Hardened tool steel 52 - 56 HRC	M14	14.0	1.50	8	180	270	6	135	203	4	90	135
		M16	16.0	1.50	8	160	240	6	120	180	4	80	120
	Hardened tool steel 56 - 60 HRC	M 6	6.0	0.50	6	320	160	4	210	105	3	160	80
		M 8	8.0	1.00	6	240	240	4	160	160	3	120	120
		M10	10.0	1.00	6	190	190	4	125	125	3	95	95
		M12	12.0	1.50	6	160	240	4	105	158	3	80	120
	Hardened tool steel > 60 HRC	M14	14.0	1.50	6	135	203	4	90	135	3	70	105
		M16	16.0	1.50	6	120	180	4	80	120	3	60	90




MF

ISO 2
(6H)

HM
MG10

X - P
Form C

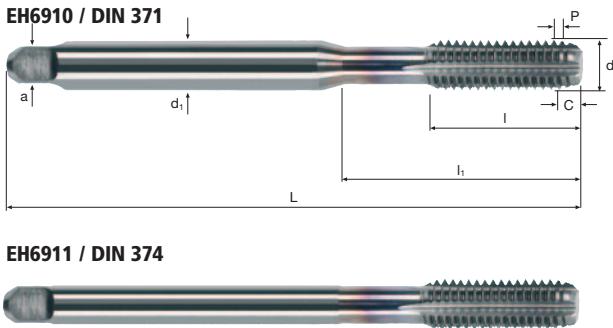

HRC
48-56

HRC
56-60

HRC
> 60

Example: Order-N°.										TiCN
Article-N°.										EH6910
ø-Code										
ø	d	P	L	l	l ₁	d ₁	a			
.050	M 6	0.50	80	17	30	6.0	4.9	4	5.60 *	●
.090	M 8	1.00	90	20	35	8.0	6.2	5	7.10	●
.092	M10	1.00	100	22	39	10.0	8.0	5	9.10	●

Example: Order-N°.										TiCN
Article-N°.										EH6911
ø-Code										
ø	d	P	L	l	l ₁	d ₁	a			
.176	M12	1.50	100	22	39	9	7.0	5	10.70 *	●
.178	M14	1.50	100	22	39	11	9.0	5	12.70 *	●
.180	M16	1.50	100	22	39	12	9.0	5	14.70 *	●
* The given dimension is out of norm										




MF

ISO 2
(6H)

HSS
PM/F

X - P
Form B

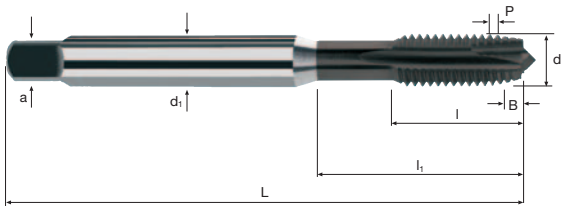

MF

Inox
Stainless


Example: Order-Nº. Article-Nº. ET1240 Ø-Code .029										TRIBO
										ET1240
Ø Code	d	P	L	l	l ₁	d ₁	a			
.029	M 2.5	0.35	50	9	—	2.8	2.1	2	2.20	●
.031	M 3	0.35	56	12	18	3.5	2.7	3	2.70	●
.032	M 3.5	0.35	56	12	20	4.0	3.0	3	3.20	●
.046	M 4	0.50	63	13	21	4.5	3.4	3	3.60 *	●
.048	M 5	0.50	70	15	25	6.0	4.9	3	4.60 *	●
.050	M 6	0.50	80	17	30	6.0	4.9	3	5.60 *	●
.052	M 8	0.50	90	20	35	8.0	6.2	3	7.60 *	●
.054	M10	0.50	100	22	39	10.0	8.0	3	9.60 *	●
.064	M 6	0.75	80	17	30	6.0	4.9	3	5.30	●
.065	M 7	0.75	80	17	30	7.0	5.5	3	6.30	●
.066	M 8	0.75	90	20	35	8.0	6.2	3	7.30	●
.068	M10	0.75	100	22	39	10.0	8.0	3	9.30	●
.090	M 8	1.00	90	20	35	8.0	6.2	3	7.10	●
.091	M 9	1.00	90	20	35	9.0	7.0	3	8.10	●
.092	M10	1.00	100	22	39	10.0	8.0	3	9.10	●
.162	M10	1.25	100	22	39	10.0	8.0	3	8.90	●
* The given dimension is out of norm										
For larger dimensions see article no. EH1241, page 259										

MF **ISO 2 (6H)**

HSS PM/F

DIN 374

Form B

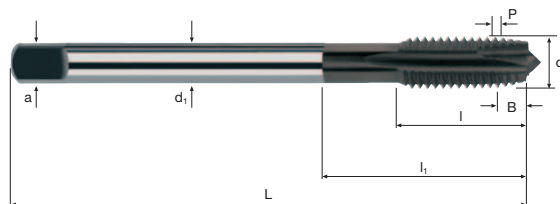

MF

Inox Stainless

Example: Order-N°. ET1241 .070										TRIBO	
										ET1241	
Ø Code	d	P	L	l	l ₁	d ₁	a				
.070	M12	0.75	100	18	39	9.0	7.0	3	11.40 *		●
.072	M14	0.75	100	18	39	11.0	9.0	3	13.40 *		●
.074	M16	0.75	100	18	39	12.0	9.0	3	15.40 *		●
.094	M12	1.00	100	18	39	9.0	7.0	3	11.10		●
.095	M13	1.00	100	18	39	11.0	9.0	3	12.10		●
.096	M14	1.00	100	18	39	11.0	9.0	3	13.10		●
.097	M15	1.00	100	18	39	12.0	9.0	3	14.10		●
.098	M16	1.00	100	18	39	12.0	9.0	3	15.10		●
.099	M17	1.00	100	18	39	12.0	9.0	4	16.10		●
.100	M18	1.00	110	20	45	14.0	11.0	4	17.10		●
.102	M20	1.00	125	20	50	16.0	12.0	4	19.10		●
.164	M12	1.25	100	22	39	9.0	7.0	3	10.90		●
.166	M14	1.25	100	22	39	11.0	9.0	3	12.90		●
.168	M16	1.25	100	22	39	12.0	9.0	3	14.90		●
.176	M12	1.50	100	22	39	9.0	7.0	3	10.70		●
.178	M14	1.50	100	22	39	11.0	9.0	3	12.70		●
.180	M16	1.50	100	22	39	12.0	9.0	3	14.70		●
.182	M18	1.50	110	25	45	14.0	11.0	4	16.70		●
.184	M20	1.50	125	26	50	16.0	12.0	4	18.70		●
.186	M22	1.50	125	26	50	18.0	14.5	4	20.70		●
.188	M24	1.50	140	27	52	18.0	14.5	4	22.70		●
* The given dimension is out of norm											

Taps x-tap




MF **ISO 2 (6H)**

HSS PM/F

DIN 374

Form C

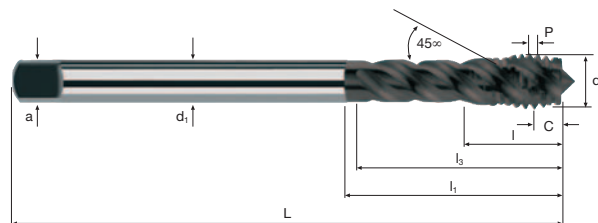

MF

Inox Stainless

Example: Order-N°. Article-N°. ET1261 ø-Code .070											TRIBO
											ET1261
Ø Code	d	P	L	l	l1	l3	d1	a			
.070	M12	0.75	100	11	39	37	9.0	7.0	4	11.40 *	●
.072	M14	0.75	100	11	39	37	11.0	9.0	4	13.40 *	●
.074	M16	0.75	100	12	39	37	12.0	9.0	4	15.40 *	●
.094	M12	1.00	100	11	39	37	9.0	7.0	4	11.10	●
.095	M13	1.00	100	11	39	37	11.0	9.0	4	12.10	●
.096	M14	1.00	100	11	39	37	11.0	9.0	4	13.10	●
.097	M15	1.00	100	12	39	37	12.0	9.0	4	14.10	●
.098	M16	1.00	100	12	39	37	12.0	9.0	4	15.10	●
.099	M17	1.00	100	12	39	37	12.0	9.0	4	16.10	●
.100	M18	1.00	110	13	50	48	14.0	11.0	4	17.10	●
.102	M20	1.00	125	14	65	63	16.0	12.0	4	19.10	●
.164	M12	1.25	100	15	39	37	9.0	7.0	4	10.90	●
.166	M14	1.25	100	15	39	37	11.0	9.0	4	12.90	●
.168	M16	1.25	100	15	39	37	12.0	9.0	4	14.90	●
.176	M12	1.50	100	15	39	37	9.0	7.0	4	10.70 *	●
.178	M14	1.50	100	15	39	37	11.0	9.0	4	12.70 *	●
.180	M16	1.50	100	15	39	37	12.0	9.0	4	14.70 *	●
.182	M18	1.50	110	17	50	48	14.0	11.0	4	16.70 *	●
.184	M20	1.50	125	18	65	63	16.0	12.0	4	18.70 *	●
.186	M22	1.50	125	18	65	63	18.0	14.5	5	20.70 *	●
.188	M24	1.50	140	20	72	70	18.0	14.5	5	22.70 *	●
* The given dimension is out of norm											


Taps



MF

ISO 2
(6H)

HSS
PM/F

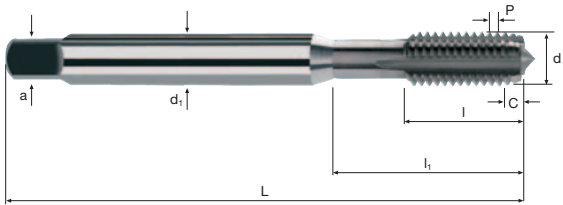

MF

GG(G)

Example: Order-Nº.										TiCN	
Article-Nº. Ø-Code										EH1270	
Article-Nº. Ø-Code											
Ø Code	d	P	L	l	l ₁	d ₁	a				
.029	M 2.5	0.35	50	9	—	2.8	2.1	3	2.15		●
.031	M 3	0.35	56	12	18	3.5	2.7	3	2.65		●
.032	M 3.5	0.35	56	12	20	4.0	3.0	3	3.15		●
.046	M 4	0.50	63	13	21	4.5	3.4	3	3.50		●
.048	M 5	0.50	70	15	25	6.0	4.9	3	4.50		●
.050	M 6	0.50	80	17	30	6.0	4.9	4	5.50		●
.052	M 8	0.50	90	20	35	8.0	6.2	4	7.50		●
.054	M10	0.50	100	22	39	10.0	8.0	4	9.50		●
.064	M 6	0.75	80	17	30	6.0	4.9	4	5.20		●
.065	M 7	0.75	80	17	30	7.0	5.5	4	6.20		●
.066	M 8	0.75	90	20	35	8.0	6.2	4	7.20		●
.068	M10	0.75	100	22	39	10.0	8.0	4	9.20		●
.090	M 8	1.00	90	20	35	8.0	6.2	4	7.00		●
.091	M 9	1.00	90	20	35	9.0	7.0	4	8.00		●
.092	M10	1.00	100	22	39	10.0	8.0	4	9.00		●
.162	M10	1.25	100	22	39	10.0	8.0	4	8.80		●
For larger dimensions see article no. EH1271, page 267											




MF

ISO 2
(6H)

HSS
PM/F

X - P
Form C

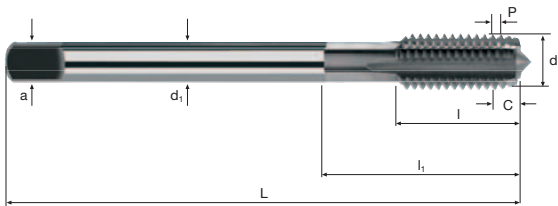

MF

GG(G)

Example: Order-N°.										TiCN	
Article-N°.										EH1271	
ø-Code											
ø Code	d	P	L	l	l ₁	d ₁	a				
.070	M12	0.75	100	18	39	9.0	7.0	4	11.30		●
.072	M14	0.75	100	18	39	11.0	9.0	4	13.30		●
.074	M16	0.75	100	18	39	12.0	9.0	4	15.30		●
.094	M12	1.00	100	18	39	9.0	7.0	4	11.00		●
.095	M13	1.00	100	18	39	11.0	9.0	4	12.00		●
.096	M14	1.00	100	18	39	11.0	9.0	4	13.00		●
.097	M15	1.00	100	18	39	12.0	9.0	4	14.00		●
.098	M16	1.00	100	18	39	12.0	9.0	4	15.00		●
.099	M17	1.00	100	18	39	12.0	9.0	4	16.00		●
.100	M18	1.00	110	20	45	14.0	11.0	4	17.00		●
.102	M20	1.00	125	20	50	16.0	12.0	4	19.00		●
.164	M12	1.25	100	22	39	9.0	7.0	4	10.80		●
.166	M14	1.25	100	22	39	11.0	9.0	4	12.80		●
.168	M16	1.25	100	22	39	12.0	9.0	4	14.80		●
.176	M12	1.50	100	22	39	9.0	7.0	4	10.50		●
.178	M14	1.50	100	22	39	11.0	9.0	4	12.50		●
.180	M16	1.50	100	22	39	12.0	9.0	4	14.50		●
.182	M18	1.50	110	25	45	14.0	11.0	4	16.50		●
.184	M20	1.50	125	26	50	16.0	12.0	4	18.50		●
.186	M22	1.50	125	26	50	18.0	14.5	5	20.50		●
.188	M24	1.50	140	27	52	18.0	14.5	5	22.50		●

Taps polytap-R




MF

ISO 2
(6H)

HSS
PM/F

Form C

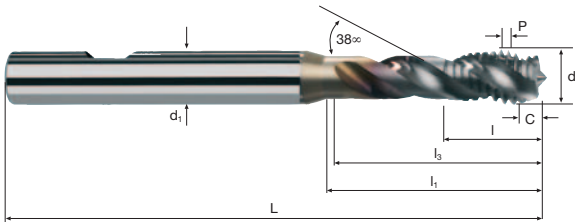

MF

Rm
< 850

Rm
850-1100

Inox
Stainless

GG(G)
Aluminium

Example: Order-N°.										TiCN	
Article-N°.										EH1229	
ø-Code											
ø Code	d	P	L	l	l ₁	l ₂	d ₁ h6				
.031	M 3	0.35	63	5	18	16	6	3	2.65		●
.046	M 4	0.50	66	7	21	19	6	3	3.50		●
.048	M 5	0.50	70	8	25	23	6	3	4.50		●
.050	M 6	0.50	80	10	30	28	6	3	5.50		●
.064	M 6	0.75	80	10	30	28	6	3	5.20		●
.066	M 8	0.75	90	13	35	33	8	3	7.20		●
.068	M10	0.75	100	15	39	37	10	3	9.20		●
.090	M 8	1.00	90	13	35	37	8	3	7.00		●
.092	M10	1.00	100	15	39	37	10	3	9.00		●
.094	M12	1.00	110	11	39	37	12	3	11.00		●
.096	M14	1.00	110	11	46	44	16	4	13.00		●
.098	M16	1.00	110	12	50	48	16	4	15.00		●
.162	M10	1.25	100	15	39	37	10	3	8.80		●
.164	M12	1.25	110	15	39	37	12	3	10.80		●
.176	M12	1.50	110	15	39	37	12	3	10.50		●
.178	M14	1.50	110	15	46	44	16	4	12.50		●
.180	M16	1.50	110	15	50	48	16	4	14.50		●
.184	M20	1.50	140	20	64	62	16	4	18.50		●



Whitworth pipe thread cylindrical G

G

N° EH1400



N° EH11425

s-tap



N° EH1472

x-tap



N° EH1475

x-tap



N° EH1482



N° EH1495



N° EH6916



N° ET1440

Inotap



N° ET1475

x-tap



N° EH1480



N° EI1402



N° EI1452



N° EH1429

polytap-R



N° E11480

u-tap



N° E11482

u-tap




	HSS PM/F		Rm <850		273
	HSS-E Co5		Rm <850		275
	HSS PM/F		Rm 850-1100		277
	HSS PM/F		Rm 850-1100		279
	HSS PM/F		Rm 1100-1500		281
	HSS PM/F		Rm 1100-1500		283
	HM MG10		HRC 48- >60		285
	HSS PM/F		Inox Stainless		287
	HSS PM/F		Inox Stainless		289
	HSS PM/F		GG(G) Cast iron		291
	HSS PM/F		Al Aluminium Alloy	Cu Copper	293
	HSS PM/F		Al Aluminium Alloy	Cu Copper	295
	HSS PM/F		Rm <850-1100	Inox Stainless	297
	HSS-E Co5		Rm <850		299
	HSS-E Co5		Rm <850		301

G

Application	Material	G	ø [mm]	P [mm]	v_c 1.0 x d [min ⁻¹]	v_f [100%]	v_c 1.5 x d [min ⁻¹]	n [min ⁻¹]	v_f [100%]	v_c 2.0 x d [min ⁻¹]	n [min ⁻¹]	v_f [100%]	
	Steel < 500 N/mm²	G 1/8	9.728	0.907	25	820	744	20	655	594	18	590	535
		G 1/4	13.157	1.337	25	605	809	20	485	648	18	435	582
		G 3/8	16.662	1.337	25	480	642	20	380	508	18	345	461
		G 1/2	20.955	1.814	25	380	689	20	305	553	18	275	499
		G 5/8	22.911	1.814	25	345	626	20	280	508	18	250	454
		G 3/4	26.441	1.814	25	300	544	20	240	435	18	215	390
	Steel 500 - 850 N/mm²	G 1/8	9.728	0.907	16	525	476	14	460	417	12	395	358
		G 1/4	13.157	1.337	16	385	515	14	340	455	12	290	388
		G 3/8	16.662	1.337	16	305	408	14	265	354	12	230	308
		G 1/2	20.955	1.814	16	245	444	14	215	390	12	180	327
		G 5/8	22.911	1.814	16	220	399	14	195	354	12	165	299
		G 3/4	26.441	1.814	16	195	354	14	170	308	12	145	263

08

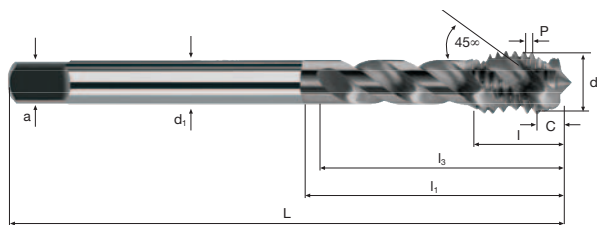





Rm
850-1100

Rm
850-1100

G

www.fraisa.com

Application	Material	G	ø [mm]	P [mm]	v_c 1.5 x d [min ⁻¹]	v_f [100%]	v_c 2.0 x d [min ⁻¹]	v_f [100%]	v_c 3.0 x d [min ⁻¹]	v_f [100%]			
	Steel 500 - 850 N/mm ²	G 1/8	9.728	0.907	25	820	744	20	655	594	15	490	444
		G 1/4	13.157	1.337	25	605	809	20	485	648	15	365	488
		G 3/8	16.662	1.337	25	480	642	20	380	508	15	285	381
		G 1/2	20.955	1.814	25	380	689	20	305	553	15	230	417
		G 5/8	22.911	1.814	25	345	626	20	280	508	15	210	381
		G 3/4	26.441	1.814	25	300	544	20	240	435	15	180	327
	Steel 850 - 1100 N/mm ²	G 1/8	9.728	0.907	20	655	594	15	490	444	12	395	358
		G 1/4	13.157	1.337	20	485	648	15	365	488	12	290	388
		G 3/8	16.662	1.337	20	380	508	15	285	381	12	230	308
		G 1/2	20.955	1.814	20	305	553	15	230	417	12	180	327
		G 5/8	22.911	1.814	20	280	508	15	210	381	12	165	299
		G 3/4	26.441	1.814	20	240	435	15	180	327	12	145	263
	Steel 1100 - 1300 N/mm ²	G 1/8	9.728	0.907	7	230	209	4	130	118			
		G 1/4	13.157	1.337	7	170	227	4	95	127			
		G 3/8	16.662	1.337	7	135	180	4	75	100			
		G 1/2	20.955	1.814	7	105	190	4	60	109			
		G 5/8	22.911	1.814	7	95	172	4	55	100			
		G 3/4	26.441	1.814	7	85	154	4	50	91			

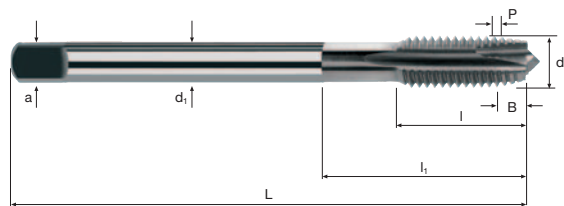


G

Rm
< 850

Rm
850-1100

Rm
1100-1300

[illegible]

Application	Material												
	Steel 1100 - 1300 N/mm²  	G	ø	P	v_c	n	v_f	v_c	n	v_f			
		[mm]	[mm]		1.0 x d	[min⁻¹]	[100%]	1.5 x d	[min⁻¹]	[100%]	2.0 x d	[min⁻¹]	[100%]
		G 1/8	9.728	0.907	10	325	295	8	260	236	5	165	150
		G 1/4	13.157	1.337	10	240	321	8	195	261	5	120	160
		G 3/8	16.662	1.337	10	190	254	8	155	207	5	95	127
		G 1/2	20.955	1.814	10	150	272	8	120	218	5	75	136
		G 5/8	22.911	1.814	10	140	254	8	110	200	5	70	127
		G 3/4	26.441	1.814	10	120	218	8	95	172	5	60	109
	Steel 1300 - 1500 N/mm²  	G 1/8	9.728	0.907	6	195	177	4	130	118	3	100	91
		G 1/4	13.157	1.337	6	145	194	4	95	127	3	75	100
		G 3/8	16.662	1.337	6	115	154	4	75	100	3	55	74
		G 1/2	20.955	1.814	6	90	163	4	60	109	3	45	82
		G 5/8	22.911	1.814	6	85	154	4	55	100	3	40	73
		G 3/4	26.441	1.814	6	70	127	4	50	91	3	35	63


Application	Material										
	Steel 1100 - 1300 N/mm ²  	G	ø	P	v_c	n	v_f	v_c	n	v_f	
		[mm]	[mm]	1.0 x d	[min ⁻¹]	[100%]	1.5 x d	[min ⁻¹]	[100%]		
		G 1/8	9.728	0.907	6	195	177	5	165	150	
		G 1/4	13.157	1.337	6	145	194	5	120	160	
		G 3/8	16.662	1.337	6	115	154	5	95	127	
		G 1/2	20.955	1.814	6	90	163	5	75	136	
		G 5/8	22.911	1.814	6	85	154	5	70	127	
		G 3/4	26.441	1.814	6	70	127	5	60	109	
	Steel 1300 - 1500 N/mm ²  	G 1/8	9.728	0.907	5	165	150	4	130	118	
		G 1/4	13.157	1.337	5	120	160	4	95	127	
		G 3/8	16.662	1.337	5	95	127	4	75	100	
		G 1/2	20.955	1.814	5	75	136	4	60	109	
		G 5/8	22.911	1.814	5	70	127	4	55	100	
		G 3/4	26.441	1.814	5	60	109	4	50	91	

15

**HSS
PM/F**

DIN
5156

Form C

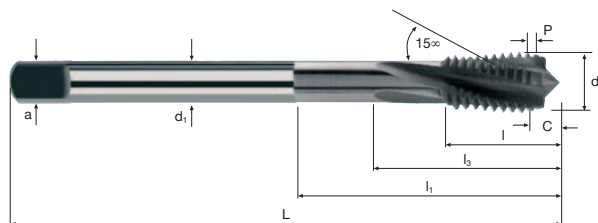


G

Rm
1100-1300

Rm
1300-1500

www.fraisa.com

Application



Material


[illegible][illegible]

G 1/8	9.728	0.907	4	130	118	2	65	59
G 1/4	13.157	1.337	4	95	127	2	50	67
G 3/8	16.662	1.337	4	75	100	2	40	53
G 1/2	20.955	1.814	4	60	109	2	30	54



G 1/8	9.728	0.907	2	65	59	1.5	50	45
G 1/4	13.157	1.337	2	50	67	1.5	35	47
G 3/8	16.662	1.337	2	40	53	1.5	30	40
G 1/2	20.955	1.814	2	30	54	1.5	25	45

Application




Material

[illegible][illegible]

G 1/8	9.728	0.907	4	130	118	2	65	59
G 1/4	13.157	1.337	4	95	127	2	50	67
G 3/8	16.662	1.337	4	75	100	2	40	53
G 1/2	20.955	1.814	4	60	109	2	30	54




G 1/8	9.728	0.907	2	65	59	1.5	50	45
G 1/4	13.157	1.337	2	50	67	1.5	35	47
G 3/8	16.662	1.337	2	40	53	1.5	30	40
G 1/2	20.955	1.814	2	30	54	1.5	25	45



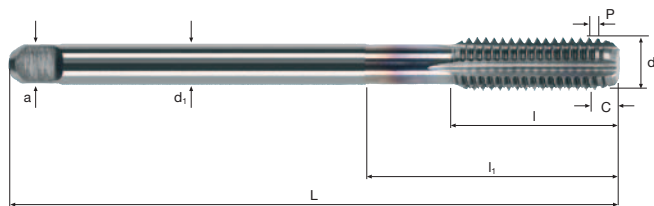


G

HRC
> 60

285


Application	Material	G	ø [mm]	P [mm]	v_c 1.5 x d [min ⁻¹]	v_f [100%]	v_c 2.0 x d [min ⁻¹]	n [100%]	v_f [100%]	v_c 3.0 x d [min ⁻¹]	n [100%]	v_f [100%]	
	Stainless steel ferritic/martensitic 	G 1/8	9.728	0.907	12	395	358	10	325	295	8	260	236
		G 1/4	13.157	1.337	12	290	388	10	240	321	8	195	261
		G 3/8	16.662	1.337	12	230	308	10	190	254	8	155	207
		G 1/2	20.955	1.814	12	180	327	10	150	272	8	120	218
		G 5/8	22.911	1.814	12	165	299	10	140	254	8	110	200
		G 3/4	26.441	1.814	12	145	263	10	120	218	8	95	172
Stainless steel [Cr-Ni/1.4301] 	G 1/8	9.728	0.907	7	230	209	5	165	150	4	130	118	
	G 1/4	13.157	1.337	7	170	227	5	120	160	4	95	127	
	G 3/8	16.662	1.337	7	135	180	5	95	127	4	75	100	
	G 1/2	20.955	1.814	7	105	190	5	75	136	4	60	109	
	G 5/8	22.911	1.814	7	95	172	5	70	127	4	55	100	
	G 3/4	26.441	1.814	7	85	154	5	60	109	4	50	91	
Stainless steel [Cr-Ni-Mo-.../1.4571] 	G 1/8	9.728	0.907	8	260	236	6	195	177	5	165	150	
	G 1/4	13.157	1.337	8	195	261	6	145	194	5	120	160	
	G 3/8	16.662	1.337	8	155	207	6	115	154	5	95	127	
	G 1/2	20.955	1.814	8	120	218	6	90	163	5	75	136	
	G 5/8	22.911	1.814	8	110	200	6	85	154	5	70	127	
	G 3/4	26.441	1.814	8	95	172	6	70	127	5	60	109	
Heat resistant steel [17-4 PH]  	G 1/8	9.728	0.907	5	165	150	4	130	118	3	100	91	
	G 1/4	13.157	1.337	5	120	160	4	95	127	3	75	100	
	G 3/8	16.662	1.337	5	95	127	4	75	100	3	55	74	
	G 1/2	20.955	1.814	5	75	136	4	60	109	3	45	82	
	G 5/8	22.911	1.814	5	70	127	4	55	100	3	40	73	
	G 3/4	26.441	1.814	5	60	109	4	50	91	3	35	63	

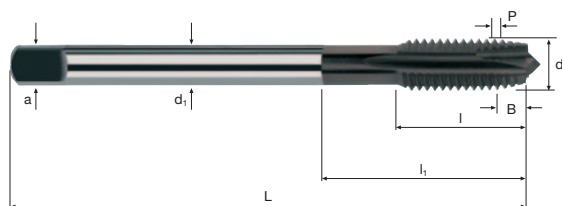


Inox
Stainless

G

[illegible]


Application	Material	G	ø [mm]	P [mm]	V _c 1.0 x d [min ⁻¹]	n [100%]	V _c 1.5 x d [min ⁻¹]	n [100%]	V _f [100%]	V _c 2.0 x d [min ⁻¹]	n [100%]	V _f [100%]	
	Stainless steel ferritic/martensitic 	G 1/8	9.728	0.907	10	325	295	8	260	236	6	195	177
		G 1/4	13.157	1.337	10	240	321	8	195	261	6	145	194
		G 3/8	16.662	1.337	10	190	254	8	155	207	6	115	154
		G 1/2	20.955	1.814	10	150	272	8	120	218	6	90	163
		G 5/8	22.911	1.814	10	140	254	8	110	200	6	85	154
		G 3/4	26.441	1.814	10	120	218	8	95	172	6	70	127
Stainless steel [Cr-Ni/1.4301] 	G 1/8	9.728	0.907	5	165	150	4	130	118	3	100	91	
	G 1/4	13.157	1.337	5	120	160	4	95	127	3	75	100	
	G 3/8	16.662	1.337	5	95	127	4	75	100	3	55	74	
	G 1/2	20.955	1.814	5	75	136	4	60	109	3	45	82	
	G 5/8	22.911	1.814	5	70	127	4	55	100	3	40	73	
	G 3/4	26.441	1.814	5	60	109	4	50	91	3	35	63	
Stainless steel [Cr-Ni-Mo-.../1.4571] 	G 1/8	9.728	0.907	6	195	177	5	165	150	4	130	118	
	G 1/4	13.157	1.337	6	145	194	5	120	160	4	95	127	
	G 3/8	16.662	1.337	6	115	154	5	95	127	4	75	100	
	G 1/2	20.955	1.814	6	90	163	5	75	136	4	60	109	
	G 5/8	22.911	1.814	6	85	154	5	70	127	4	55	100	
	G 3/4	26.441	1.814	6	70	127	5	60	109	4	50	91	
Heat resistant steel [17-4 PH] 	G 1/8	9.728	0.907	4	130	118	3	100	91				
	G 1/4	13.157	1.337	4	95	127	3	75	100				
	G 3/8	16.662	1.337	4	75	100	3	55	74				
	G 1/2	20.955	1.814	4	60	109	3	45	82				
	G 5/8	22.911	1.814	4	55	100	3	40	73				
	G 3/4	26.441	1.814	4	50	91	3	35	63				

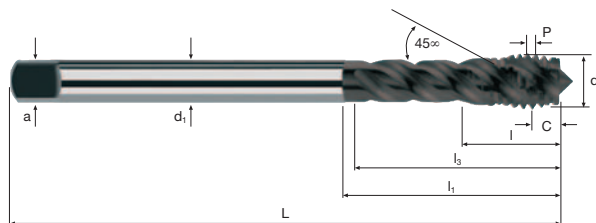

Inox
Stainless

G

289




Material

Cast iron
GG

G	ø	P	v_c	n	v_f	v_c	n	v_f	v_c	n	v_f
[mm]	[mm]		$1.0 \times d$	[min ⁻¹]	[100%]	$1.5 \times d$	[min ⁻¹]	[100%]	$2.0 \times d$	[min ⁻¹]	[100%]
G 1/8	9.728	0.907	28	915	830	24	785	712	20	655	594
G 1/4	13.157	1.337	28	675	902	24	580	775	20	485	648
G 3/8	16.662	1.337	28	535	715	24	460	615	20	380	508
G 1/2	20.955	1.814	28	425	771	24	365	662	20	305	553
G 5/8	22.911	1.814	28	390	707	24	335	608	20	280	508
G 3/4	26.441	1.814	28	335	608	24	290	526	20	240	435

Cast iron
GGG

G 1/8	9.728	0.907	20	655	594	18	590	535	15	490	444
G 1/4	13.157	1.337	20	485	648	18	435	582	15	365	488
G 3/8	16.662	1.337	20	380	508	18	345	461	15	285	381
G 1/2	20.955	1.814	20	305	553	18	275	499	15	230	417
G 5/8	22.911	1.814	20	280	508	18	250	454	15	210	381
G 3/4	26.441	1.814	20	240	435	18	215	390	15	180	327




Material

Cast iron
GG

G	ø	P	v_c	n	v_f	v_c	n	v_f	v_c	n	v_f
[mm]	[mm]		$1.5 \times d$	[min ⁻¹]	[100%]	$2.0 \times d$	[min ⁻¹]	[100%]	$3.0 \times d$	[min ⁻¹]	[100%]
G 1/8	9.728	0.907	30	980	889	28	915	830	25	820	744
G 1/4	13.157	1.337	30	725	969	28	675	902	25	605	809
G 3/8	16.662	1.337	30	575	769	28	535	715	25	480	642
G 1/2	20.955	1.814	30	455	825	28	425	771	25	380	689
G 5/8	22.911	1.814	30	415	753	28	390	707	25	345	626
G 3/4	26.441	1.814	30	360	653	28	335	608	25	300	544


Cast iron
GGG


G 1/8	9.728	0.907	25	820	744	22	720	653	20	655	594
G 1/4	13.157	1.337	25	605	809	22	530	709	20	485	648
G 3/8	16.662	1.337	25	480	642	22	420	562	20	380	508
G 1/2	20.955	1.814	25	380	689	22	335	608	20	305	553
G 5/8	22.911	1.814	25	345	626	22	305	553	20	280	508
G 3/4	26.441	1.814	25	300	544	22	265	481	20	240	435

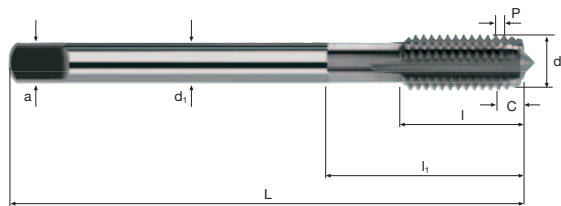

G

GG(G)

Application	Material	G	ø [mm]	P [mm]	V _c 1.5 x d [min ⁻¹]	n [100%]	V _c 2.0 x d [min ⁻¹]	n [100%]	V _c 3.0 x d [min ⁻¹]	n [100%]			
	Unalloyed aluminium	G 1/8	9.728	0.907	23	755	685	19	620	562	16	525	476
		G 1/4	13.157	1.337	23	555	742	19	460	615	16	385	515
		G 3/8	16.662	1.337	23	440	588	19	365	488	16	305	408
		G 1/2	20.955	1.814	23	350	635	19	290	526	16	245	444
		G 5/8	22.911	1.814	23	320	580	19	265	481	16	220	399
		G 3/4	26.441	1.814	23	275	499	19	230	417	16	195	354
Wrought aluminium alloys Si < 6% not hardened	G 1/8	9.728	0.907	35	1145	1039	30	980	889	25	820	744	
	G 1/4	13.157	1.337	35	845	1130	30	725	969	25	605	809	
	G 3/8	16.662	1.337	35	670	896	30	575	769	25	480	642	
	G 1/2	20.955	1.814	35	530	961	30	455	825	25	380	689	
	G 5/8	22.911	1.814	35	485	880	30	415	753	25	345	626	
	G 3/4	26.441	1.814	35	420	762	30	360	653	25	300	544	
Wrought aluminium alloys Si < 6% hardened	G 1/8	9.728	0.907	20	655	594	17	555	503	14	460	417	
	G 1/4	13.157	1.337	20	485	648	17	410	548	14	340	455	
	G 3/8	16.662	1.337	20	380	508	17	325	435	14	265	354	
	G 1/2	20.955	1.814	20	305	553	17	260	472	14	215	390	
	G 5/8	22.911	1.814	20	280	508	17	235	426	14	195	354	
	G 3/4	26.441	1.814	20	240	435	17	205	372	14	170	308	
Unalloyed copper	G 1/8	9.728	0.907	21	685	621	18	590	535	15	490	444	
	G 1/4	13.157	1.337	21	510	682	18	435	582	15	365	488	
	G 3/8	16.662	1.337	21	400	535	18	345	461	15	285	381	
	G 1/2	20.955	1.814	21	320	580	18	275	499	15	230	417	
	G 5/8	22.911	1.814	21	290	526	18	250	454	15	210	381	
	G 3/4	26.441	1.814	21	255	463	18	215	390	15	180	327	

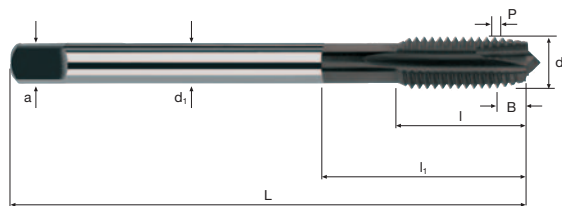

Al
Aluminium
> 99%

Al
Aluminium
Alloy


Al
Aluminium
Cast


Cu
Copper



Plastic
Thermoplast

www.fraisa.com

Application	Material	G	ø [mm]	P [mm]	V _c 1.0 x d [min ⁻¹]	v _f [100%]	V _c 1.5 x d [min ⁻¹]	v _f [100%]	V _c 2.0 x d [min ⁻¹]	n [min ⁻¹]	v _f [100%]		
	Unalloyed aluminium	G 1/8	9.728	0.907	15	490	444	12	395	358	10	325	295
		G 1/4	13.157	1.337	15	365	488	12	290	388	10	240	321
		G 3/8	16.662	1.337	15	285	381	12	230	308	10	190	254
		G 1/2	20.955	1.814	15	230	417	12	180	327	10	150	272
		G 5/8	22.911	1.814	15	210	381	12	165	299	10	140	254
		G 3/4	26.441	1.814	15	180	327	12	145	263	10	120	218
	Wrought aluminium alloys Si < 6% not hardened	G 1/8	9.728	0.907	15	490	444	13	425	385	10	325	295
		G 1/4	13.157	1.337	15	365	488	13	315	421	10	240	321
		G 3/8	16.662	1.337	15	285	381	13	250	334	10	190	254
		G 1/2	20.955	1.814	15	230	417	13	195	354	10	150	272
		G 5/8	22.911	1.814	15	210	381	13	180	327	10	140	254
		G 3/4	26.441	1.814	15	180	327	13	155	281	10	120	218
	Wrought aluminium alloys Si < 6% hardened	G 1/8	9.728	0.907	13	425	385	11	360	327	10	325	295
		G 1/4	13.157	1.337	13	315	421	11	265	354	10	240	321
		G 3/8	16.662	1.337	13	250	334	11	210	281	10	190	254
		G 1/2	20.955	1.814	13	195	354	11	165	299	10	150	272
		G 5/8	22.911	1.814	13	180	327	11	155	281	10	140	254
		G 3/4	26.441	1.814	13	155	281	11	130	236	10	120	218
Unalloyed copper	G 1/8	9.728	0.907	20	655	594	18	590	535	16	525	476	
	G 1/4	13.157	1.337	20	485	648	18	435	582	16	385	515	
	G 3/8	16.662	1.337	20	380	508	18	345	461	16	305	408	
	G 1/2	20.955	1.814	20	305	553	18	275	499	16	245	444	
	G 5/8	22.911	1.814	20	280	508	18	250	454	16	220	399	
	G 3/4	26.441	1.814	20	240	435	18	215	390	16	195	354	

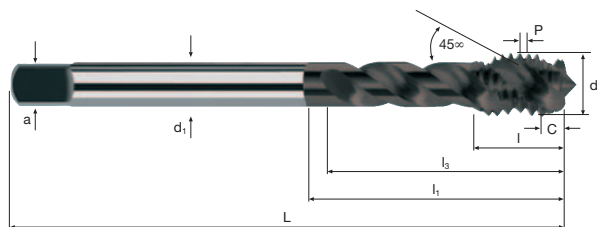

G

Al
Aluminium
> 99%

Al
Aluminium
Alloy

Al
Aluminium
Cast

Cu
Copper

Plastic Thermoplast

[illegible]

Application	Material									
	Steel < 500 N/mm²	G	ø	P	v_c	n	v_c	n	v_c	n
		[mm]	[mm]		1.0 x d	[min⁻¹]	1.5 x d	[min⁻¹]	2.0 x d	[min⁻¹]
		G 1/8	9.728	0.907	25	820	22	720	15	490
		G 1/4	13.157	1.337	25	605	22	530	15	365
		G 3/8	16.662	1.337	25	480	22	420	15	285
		G 1/2	20.955	1.814	25	380	22	335	15	230
		G 5/8	22.911	1.814	25	345	22	305	15	210
		G 3/4	26.441	1.814	25	300	22	265	15	180
	Steel 500 - 850 N/mm²	G 1/8	9.728	0.907	22	720	20	655	12	395
		G 1/4	13.157	1.337	22	530	20	485	12	290
		G 3/8	16.662	1.337	22	420	20	380	12	230
		G 1/2	20.955	1.814	22	335	20	305	12	180
		G 5/8	22.911	1.814	22	305	20	280	12	165
		G 3/4	26.441	1.814	22	265	20	240	12	145
	Steel 850 - 1100 N/mm²	G 1/8	9.728	0.907	18	590	12	395	8	260
		G 1/4	13.157	1.337	18	435	12	290	8	195
		G 3/8	16.662	1.337	18	345	12	230	8	155
		G 1/2	20.955	1.814	18	275	12	180	8	120
		G 5/8	22.911	1.814	18	250	12	165	8	110
		G 3/4	26.441	1.814	18	215	12	145	8	95
	Cast iron GG(G)	G 1/8	9.728	0.907	18	590	15	490	12	395
		G 1/4	13.157	1.337	18	435	15	365	12	290
		G 3/8	16.662	1.337	18	345	15	285	12	230
		G 1/2	20.955	1.814	18	275	15	230	12	180
		G 5/8	22.911	1.814	18	250	15	210	12	165
		G 3/4	26.441	1.814	18	215	15	180	12	145

Material										
Stainless steel [Cr-Ni/1.4301] 	G	ø	P	v_c	n	v_c	n	v_c	n	
	[mm]	[mm]		1.0 x d	[min⁻¹]	1.5 x d	[min⁻¹]	2.0 x d	[min⁻¹]	
	G 1/8	9.728	0.907	4	130	3	100	2	65	
	G 1/4	13.157	1.337	4	95	3	75	2	50	
	G 3/8	16.662	1.337	4	75	3	55	2	40	
	G 1/2	20.955	1.814	4	60	3	45	2	30	
	G 5/8	22.911	1.814	4	55	3	40	2	30	
	G 3/4	26.441	1.814	4	50	3	35	2	25	
	Wrought aluminium alloys Si < 6% hardened									
		G 1/8	9.728	0.907	12	395	10	325	8	260
		G 1/4	13.157	1.337	12	290	10	240	8	195
		G 3/8	16.662	1.337	12	230	10	190	8	155
		G 1/2	20.955	1.814	12	180	10	150	8	120
		G 5/8	22.911	1.814	12	165	10	140	8	110
		G 3/4	26.441	1.814	12	145	10	120	8	95

A diagram showing a V-shaped notch. The angle between the two sloping sides is labeled as 55°.


**HSS
PM/F**



DIN
1835B
ISO
3338



Form C

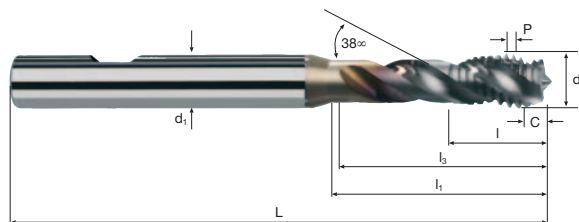

Rm
< 850


Rm
850-1100

Inox
Stainless


GG(G)
Aluminium

G

www.fraisa.com

Application	Material	<table><tr><th>G</th><th>ø [mm]</th><th>P [mm]</th><th>v_c 1.5 x d</th><th>n [min⁻¹]</th><th>v_f [100%]</th><th>v_c 2.0 x d</th><th>n [min⁻¹]</th><th>v_f [100%]</th><th>v_c 3.0 x d</th><th>n [min⁻¹]</th><th>v_f [100%]</th></tr></table>												G	ø [mm]	P [mm]	v_c 1.5 x d	n [min ⁻¹]	v_f [100%]	v_c 2.0 x d	n [min ⁻¹]	v_f [100%]	v_c 3.0 x d	n [min ⁻¹]	v_f [100%]
G	ø [mm]	P [mm]	v_c 1.5 x d	n [min ⁻¹]	v_f [100%]	v_c 2.0 x d	n [min ⁻¹]	v_f [100%]	v_c 3.0 x d	n [min ⁻¹]	v_f [100%]														
	Steel < 500 N/mm ²	G 1/8	9.728	0.907	18	590	535	15	490	444	12	395	358												
		G 1/4	13.157	1.337	18	435	582	15	365	488	12	290	388												
		G 3/8	16.662	1.337	18	345	461	15	285	381	12	230	308												
		G 1/2	20.955	1.814	18	275	499	15	230	417	12	180	327												
		G 5/8	22.911	1.814	18	250	454	15	210	381	12	165	299												
		G 3/4	26.441	1.814	18	215	390	15	180	327	12	145	263												
	Steel 500 - 850 N/mm ²	G 1/8	9.728	0.907	15	490	444	10	325	295	8	260	236												
		G 1/4	13.157	1.337	15	365	488	10	240	321	8	195	261												
		G 3/8	16.662	1.337	15	285	381	10	190	254	8	155	207												
		G 1/2	20.955	1.814	15	230	417	10	150	272	8	120	218												
		G 5/8	22.911	1.814	15	210	381	10	140	254	8	110	200												
		G 3/4	26.441	1.814	15	180	327	10	120	218	8	95	172												
	Wrought aluminium alloys Si < 6% hardened	G 1/8	9.728	0.907	15	490	444	12	395	358	10	325	295												
		G 1/4	13.157	1.337	15	365	488	12	290	388	10	240	321												
		G 3/8	16.662	1.337	15	285	381	12	230	308	10	190	254												
		G 1/2	20.955	1.814	15	230	417	12	180	327	10	150	272												
		G 5/8	22.911	1.814	15	210	381	12	165	299	10	140	254												
		G 3/4	26.441	1.814	15	180	327	12	145	263	10	120	218												
	Stainless steel [Cr-Ni/1.4301]	G 1/8	9.728	0.907	5	165	150	4	130	118	3	100	91												
		G 1/4	13.157	1.337	5	120	160	4	95	127	3	75	100												
		G 3/8	16.662	1.337	5	95	127	4	75	100	3	55	74												
		G 1/2	20.955	1.814	5	75	136	4	60	109	3	45	82												
		G 5/8	22.911	1.814	5	70	127	4	55	100	3	40	73												
		G 3/4	26.441	1.814	5	60	109	4	50	91	3	35	63												

| | | | | | | | | | | | | |


Application	Material									
	Steel < 500 N/mm ²	G	ø	P	v _c	n	v _f	v _c	n	v _f
		[mm]	[mm]	1.0 x d	[min ⁻¹]	[100%]	1.5 x d	[min ⁻¹]	[100%]	2.0 x d
		G 1/8	9.728	0.907	14	460	417	12	395	358
		G 1/4	13.157	1.337	14	340	455	12	290	388
		G 3/8	16.662	1.337	14	265	354	12	230	308
		G 1/2	20.955	1.814	14	215	390	12	180	327
		G 5/8	22.911	1.814	14	195	354	12	165	299
		G 3/4	26.441	1.814	14	170	308	12	145	263
	Steel 500 - 850 N/mm ²	G 1/8	9.728	0.907	9	295	268	8	260	236
		G 1/4	13.157	1.337	9	220	294	8	195	261
		G 3/8	16.662	1.337	9	170	227	8	155	207
		G 1/2	20.955	1.814	9	135	245	8	120	218
		G 5/8	22.911	1.814	9	125	227	8	110	200
		G 3/4	26.441	1.814	9	110	200	8	95	172
	Wrought aluminium alloys Si < 6% hardened	G 1/8	9.728	0.907	10	325	295	8	260	236
		G 1/4	13.157	1.337	10	240	321	8	195	261
		G 3/8	16.662	1.337	10	190	254	8	155	207
		G 1/2	20.955	1.814	10	150	272	8	120	218
		G 5/8	22.911	1.814	10	140	254	8	110	200
	Recommendation: uncoated	G 3/4	26.441	1.814	10	120	218	8	95	172
	Stainless steel [Cr-Ni/1.4301]	G 1/8	9.728	0.907	4	130	118	3	100	91
		G 1/4	13.157	1.337	4	95	127	3	75	100
		G 3/8	16.662	1.337	4	75	100	3	55	74
		G 1/2	20.955	1.814	4	60	109	3	45	82
		G 5/8	22.911	1.814	4	55	100	3	40	73
		G 3/4	26.441	1.814	4	50	91	3	35	63



Unified thread UNC / UNJC / UNF / UNJF

UNC, tolerance 2B

N° EH1687 / EH1688



	HSS PM/F		Rm 850-1100		305
--	-------------	--	----------------	--	-----

N° EH1690 / EH1691 x-tap



	HSS PM/F		Rm 850-1100		309
--	-------------	--	----------------	--	-----

N° ET1620 / ET1621



	HSS PM/F		Inox Stainless		313
--	-------------	--	-------------------	--	-----

N° ET1690 / ET1691 x-tap



	HSS PM/F		Inox Stainless		317
--	-------------	--	-------------------	--	-----

N° EI1602



	HSS PM/F		Al Aluminium Alloy	Cu Copper	321
--	-------------	--	-----------------------	--------------	-----

N° EI1652



	HSS PM/F		Al Aluminium Alloy	Cu Copper	323
--	-------------	--	-----------------------	--------------	-----

UNJC, tolerance 3B

N° E1699



	HSS PM/F		Ni Nickel Alloy		325
--	-------------	--	--------------------	--	-----

UNF, tolerance 2B

N° EH1787 / EH1788



	HSS PM/F		Rm 850-1100		327
--	-------------	--	----------------	--	-----

N° EH1790 / EH1791 x-tap



	HSS PM/F		Rm 850-1100		329
--	-------------	--	----------------	--	-----

N° ET1750 / ET1751



	HSS PM/F		Inox Stainless		331
--	-------------	--	-------------------	--	-----

N° ET1790 / ET1791 x-tap



	HSS PM/F		Inox Stainless		333
--	-------------	--	-------------------	--	-----

UNJF, tolerance 3B

N° E1799



	HSS PM/F		Ni Nickel Alloy		335
--	-------------	--	--------------------	--	-----

UN

Steel
500 - 850 N/mm²

Steel
500 - 850 N/mm²

Steel
850 - 1100 N/mm²

Steel
850 - 1100 N/mm²


Steel
1100 - 1300 N/mm²



Steel
1100 - 1300 N/mm²



2B

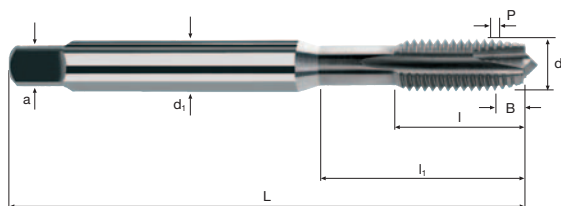


< 850

850-1100


1100-1300

UN

305

Application	Material	<table> <tr> <th rowspan="2">UNC</th><th rowspan="2">ø [mm]</th><th rowspan="2">P [mm]</th><th colspan="3">V_c 1.5 x d</th><th colspan="3">V_c 2.0 x d</th><th colspan="3">V_c 3.0 x d</th></tr> <tr> <th>n</th><th>v_f</th><th>[100%]</th><th>n</th><th>v_f</th><th>[100%]</th><th>n</th><th>v_f</th><th>[100%]</th></tr> </table>	UNC	ø [mm]	P [mm]	V _c 1.5 x d			V _c 2.0 x d			V _c 3.0 x d			n	v _f	[100%]	n	v _f	[100%]	n	v _f	[100%]
UNC	ø [mm]	P [mm]				V _c 1.5 x d			V _c 2.0 x d			V _c 3.0 x d											
			n	v _f	[100%]	n	v _f	[100%]	n	v _f	[100%]												
	Steel 500 - 850 N/mm ²	7/16	-14	11.113	1.814	20	575	1043	16	460	834	12	345	626									
		1/2	-13	12.700	1.954	20	500	977	16	400	782	12	300	586									
		9/16	-12	14.288	2.117	20	445	942	16	355	752	12	265	561									
		5/8	-11	15.875	2.309	20	400	924	16	320	739	12	240	554									
		3/4	-10	19.050	2.540	20	335	851	16	265	673	12	200	508									
		7/8	-9	22.225	2.822	20	285	804	16	230	649	12	170	480									
	Steel 850 - 1100 N/mm ²	1"	-8	25.400	3.175	20	250	794	16	200	635	12	150	476									
	Steel 1100 - 1300 N/mm ²	7/16	-14	11.113	1.814	5	145	263	3	85	154												
		1/2	-13	12.700	1.954	5	125	244	3	75	147												
		9/16	-12	14.288	2.117	5	110	233	3	65	138												
		5/8	-11	15.875	2.309	5	100	231	3	60	139												
		3/4	-10	19.050	2.540	5	85	216	3	50	127												
		7/8	-9	22.225	2.822	5	70	198	3	45	127												
		1"	-8	25.400	3.175	5	65	206	3	40	127												

2B

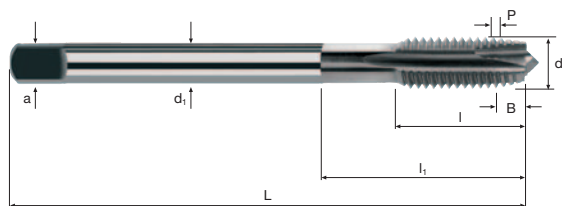

< 850

850-1100

1100-1300

UN

www.fraisa.com

UNC

2B




**HSS
PM/F**



A cross-sectional diagram of a butt joint. Two plates, each 10 mm thick, are joined by a square groove weld. The weld is shown as a square indentation on the top surface of the joint. The plates are labeled with dimensions: 10 mm thickness and 10 mm width. The weld is labeled with a depth of 10 mm.



Form C

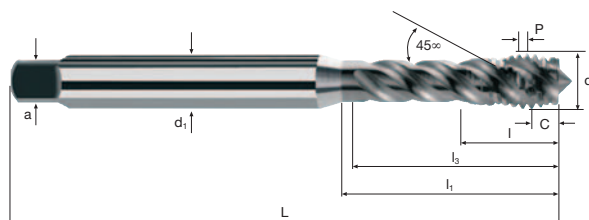

Rm
< 850

Rm
850-1100

UN

[illegible]

Application	Material	UNC ø [mm] P [mm] v_c 1.0 x d n [min⁻¹] v_f [100%] v_c 1.5 x d n [min⁻¹] v_f [100%] v_c 2.0 x d n [min⁻¹] v_f [100%]
	Steel 500 - 850 N/mm ²	7/16 -14 11.113 1.814 25 715 1297 22 630 1143 18 515 934
		1/2 -13 12.700 1.954 25 625 1221 22 550 1075 18 450 879
		9/16 -12 14.288 2.117 25 555 1175 22 490 1037 18 400 847
		5/8 -11 15.875 2.309 25 500 1155 22 440 1016 18 360 831
		3/4 -10 19.050 2.540 25 420 1067 22 370 940 18 300 762
		7/8 -9 22.225 2.822 25 360 1016 22 315 889 18 260 734
		1" -8 25.400 3.175 25 315 1000 22 275 873 18 225 714
Steel 850 - 1100 N/mm ²		7/16 -14 11.113 1.814 16 460 834 13 370 671 8 230 417
		1/2 -13 12.700 1.954 16 400 782 13 325 635 8 200 391
		9/16 -12 14.288 2.117 16 355 752 13 290 614 8 180 381
		5/8 -11 15.875 2.309 16 320 739 13 260 600 8 160 369
		3/4 -10 19.050 2.540 16 265 673 13 215 546 8 135 343
		7/8 -9 22.225 2.822 16 230 649 13 185 522 8 115 325
		1" -8 25.400 3.175 16 200 635 13 165 524 8 100 318

UNC

2B




**HSS
PM/F**



A cross-sectional diagram of a butt joint. Two plates, represented by diagonal hatching, are joined by a square groove weld. The weld metal is shown as a solid white area filling the groove and extending slightly beyond the plate edges.



Form C

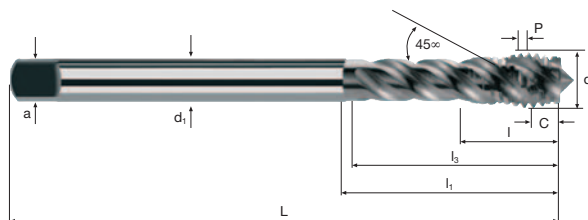

Rm
< 850

Rm
850-1100

UN

[illegible]

Stainless steel
ferritic/martensitic


[illegible]

Stainless steel
[Cr-Ni-Mo-.../1.4571]

[illegible]




Form B

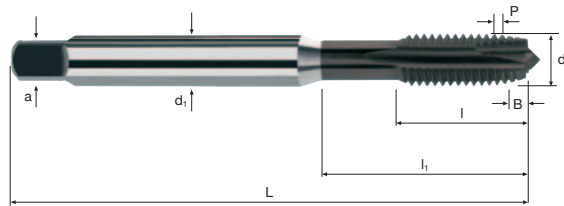

UN

313



Material

Stainless steel
ferritic/martensitic


Stainless steel
[Cr-Ni/1.4301]

Stainless steel
[Cr-Ni-Mo-.../1.4571]

Heat resistant steel
[17-4 PH]

UNC			P			V _c			V _c			V _c		
ø			[mm]			1.5 x d			2.0 x d			3.0 x d		
n			[mm]			[min ⁻¹]			[min ⁻¹]			[min ⁻¹]		
v _f			[100%]			[100%]			[100%]			[100%]		
7/16	-14	11.113	1.814	10	285	517	8	230	417	6	170	308		
1/2	-13	12.700	1.954	10	250	489	8	200	391	6	150	293		
9/16	-12	14.288	2.117	10	225	476	8	180	381	6	135	286		
5/8	-11	15.875	2.309	10	200	462	8	160	369	6	120	277		
3/4	-10	19.050	2.540	10	165	419	8	135	343	6	100	254		
7/8	-9	22.225	2.822	10	145	409	8	115	325	6	85	240		
1"	-8	25.400	3.175	10	125	397	8	100	318	6	75	238		
7/16	-14	11.113	1.814	6	170	308	4	115	209	3	85	154		
1/2	-13	12.700	1.954	6	150	293	4	100	195	3	75	147		
9/16	-12	14.288	2.117	6	135	286	4	90	191	3	65	138		
5/8	-11	15.875	2.309	6	120	277	4	80	185	3	60	139		
3/4	-10	19.050	2.540	6	100	254	4	65	165	3	50	127		
7/8	-9	22.225	2.822	6	85	240	4	55	155	3	45	127		
1"	-8	25.400	3.175	6	75	238	4	50	159	3	40	127		
7/16	-14	11.113	1.814	6	170	308	5	145	263	4	115	209		
1/2	-13	12.700	1.954	6	150	293	5	125	244	4	100	195		
9/16	-12	14.288	2.117	6	135	286	5	110	233	4	90	191		
5/8	-11	15.875	2.309	6	120	277	5	100	231	4	80	185		
3/4	-10	19.050	2.540	6	100	254	5	85	216	4	65	165		
7/8	-9	22.225	2.822	6	85	240	5	70	198	4	55	155		
1"	-8	25.400	3.175	6	75	238	5	65	206	4	50	159		
7/16	-14	11.113	1.814	4	115	209	3	85	154	2	55	100		
1/2	-13	12.700	1.954	4	100	195	3	75	147	2	50	98		
9/16	-12	14.288	2.117	4	90	191	3	65	138	2	45	95		
5/8	-11	15.875	2.309	4	80	185	3	60	139	2	40	92		
3/4	-10	19.050	2.540	4	65	165	3	50	127	2	35	89		
7/8	-9	22.225	2.822	4	55	155	3	45	127	2	30	85		
1"	-8	25.400	3.175	4	50	159	3	40	127	2	25	79		

2B

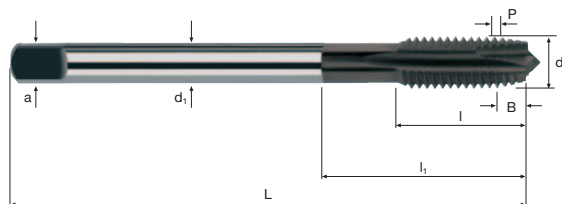

Inox
Stainless

UN

UNC


2B



**HSS
PM/F**

DIN
371

Form C

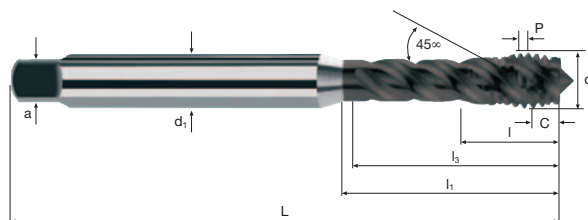

Inox
Stainless


UN

[illegible]

Application	Material	UNC			V _c			n			V _f			V _c			n			V _f		
		ø	P		1.0 x d			1.5 x d			2.0 x d			1.0 x d			1.5 x d			2.0 x d		
	Stainless steel ferritic/martensitic	7/16	-14	11.113	1.814	8	230	417	6	170	308	5	145	263								
		1/2	-13	12.700	1.954	8	200	391	6	150	293	5	125	244								
		9/16	-12	14.288	2.117	8	180	381	6	135	286	5	110	233								
		5/8	-11	15.875	2.309	8	160	369	6	120	277	5	100	231								
	Stainless steel [Cr-Ni/1.4301]	3/4	-10	19.050	2.540	8	135	343	6	100	254	5	85	216								
		7/8	-9	22.225	2.822	8	115	325	6	85	240	5	70	198								
		1"	-8	25.400	3.175	8	100	318	6	75	238	5	65	206								
	Stainless steel [Cr-Ni-Mo-.../1.4571]	7/16	-14	11.113	1.814	5	145	263	4	115	209	3	85	154								
		1/2	-13	12.700	1.954	5	125	244	4	100	195	3	75	147								
		9/16	-12	14.288	2.117	5	110	233	4	90	191	3	65	138								
		5/8	-11	15.875	2.309	5	100	231	4	80	185	3	60	139								
	Heat resistant steel [17-4 PH]	3/4	-10	19.050	2.540	5	85	216	4	65	165	3	50	127								
		7/8	-9	22.225	2.822	5	70	198	4	55	155	3	45	127								
		1"	-8	25.400	3.175	5	65	206	4	50	159	3	40	127								
	Heat resistant steel [17-4 PH]	7/16	-14	11.113	1.814	3	85	154	2	55	100											
		1/2	-13	12.700	1.954	3	75	147	2	50	98											
		9/16	-12	14.288	2.117	3	65	138	2	45	95											
		5/8	-11	15.875	2.309	3	60	139	2	40	92											
	Heat resistant steel [17-4 PH]	3/4	-10	19.050	2.540	3	50	127	2	35	89											
		7/8	-9	22.225	2.822	3	45	127	2	30	85											
		1"	-8	25.400	3.175	3	40	127	2	25	79											

In

2B

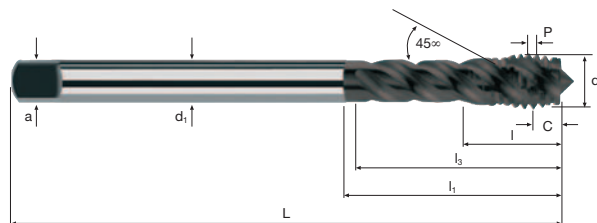

Inox
Stainless

UN


[illegible]

Application	Material	UNC ø [mm] P [mm]	V _c 1.5 x d [min'] n [min⁻¹] v _f [100%]	V _c 2.0 x d [min'] n [min⁻¹] v _f [100%]	V _c 3.0 x d [min'] n [min⁻¹] v _f [100%]
	Unalloyed aluminium	2 -56 2.184 0.454	18 2625 1192	15 2185 992	13 1895 860
		3 -48 2.515 0.529	18 2280 1206	15 1900 1005	13 1645 870
		4 -40 2.845 0.635	18 2015 1280	15 1680 1067	13 1455 924
		5 -40 3.175 0.635	18 1805 1146	15 1505 956	13 1305 829
		6 -32 3.505 0.794	18 1635 1298	15 1360 1080	13 1180 937
		8 -32 4.166 0.794	18 1375 1092	15 1145 909	13 995 790
		10 -24 4.826 1.058	18 1185 1254	15 990 1047	13 855 905
		12 -24 5.486 1.058	18 1045 1106	15 870 920	13 755 799
		1/4 -20 6.350 1.270	18 900 1143	15 750 953	13 650 826
	Unalloyed aluminium	5/16 -18 7.938 1.411	18 720 1016	15 600 847	13 520 734
		3/8 -16 9.525 1.588	18 600 953	15 500 794	13 435 691
	Wrought aluminium alloys Si < 6% not hardened	2 -56 2.184 0.454	28 4080 1852	24 3500 1589	20 2915 1323
		3 -48 2.515 0.529	28 3545 1875	24 3040 1608	20 2530 1338
		4 -40 2.845 0.635	28 3135 1991	24 2685 1705	20 2240 1422
		5 -40 3.175 0.635	28 2805 1781	24 2405 1527	20 2005 1273
		6 -32 3.505 0.794	28 2545 2021	24 2180 1731	20 1815 1441
		8 -32 4.166 0.794	28 2140 1699	24 1835 1457	20 1530 1215
		10 -24 4.826 1.058	28 1845 1952	24 1585 1677	20 1320 1397
		12 -24 5.486 1.058	28 1625 1719	24 1395 1476	20 1160 1227
		1/4 -20 6.350 1.270	28 1405 1784	24 1205 1530	20 1005 1276
	Wrought aluminium alloys Si < 6% not hardened	5/16 -18 7.938 1.411	28 1125 1587	24 960 1355	20 800 1129
		3/8 -16 9.525 1.588	28 935 1485	24 800 1270	20 670 1064

[illegible]



Form B

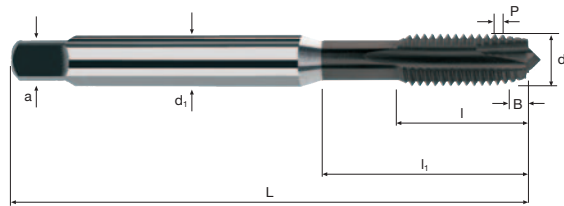


Plastic Thermoplast

UN

[illegible]

[illegible][illegible]

Application



Material

**Nickel base alloys
not hardened**




**Nickel base alloys
hardened**

[illegible]

Application



Material

Material

**Nickel base alloys
not hardened**



Nickel base alloys hardened


 

[illegible]

UNF

2B

HSS PM/F

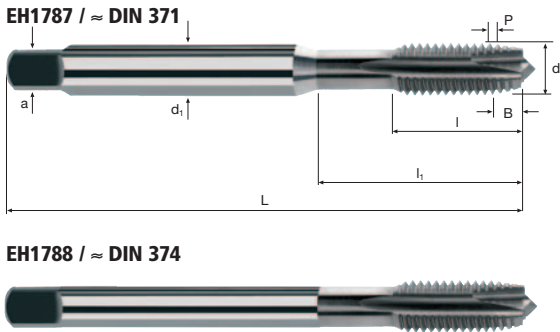

Rm < 850	Rm 850-1100	Rm 1100-1300							
-------------	----------------	-----------------	--	--	--	--	--	--	--

Example: Order-Nº. EH1787 .756											TiCN
Article-Nº. EH1787 ø-Code .756											EH1787
Ø Code	d	P(TPI)	d (mm)	L	l	l ₁	d ₁	a			
.756	Nr. 6	-40	3.505	56	12	20	4.0	3.0	3	2.95	●
.757	Nr. 8	-36	4.166	63	13	21	4.5	3.4	3	3.50	●
.758	Nr. 10	-32	4.826	70	15	25	6.0	4.9	3	4.10	●
.759	Nr. 12	-28	5.486	80	17	30	6.0	4.9	3	4.60	●
.760	1/4	-28	6.350	80	17	30	7.0	5.5	3	5.50	●
.761	5/16	-24	7.938	90	20	35	8.0	6.2	3	6.90	●
.762	3/8	-24	9.525	100	22	39	10.0	8.0	3	8.50	●

Example: Order-Nº. EH1788 .763											TiCN
Article-Nº. EH1788 ø-Code .763											EH1788
Ø Code	d	P(TPI)	d (mm)	L	l	l ₁	d ₁	a			
.763	7/16	-20	11.113	100	22	39	8.0	6.2	3	9.90	●
.764	1/2	-20	12.700	100	22	39	9.0	7.0	3	11.50	●
.765	9/16	-18	14.288	100	22	39	11.0	9.0	3	12.90	●
.766	5/8	-18	15.875	100	22	39	12.0	9.0	3	14.50	●
.767	3/4	-16	19.050	110	25	45	14.0	11.0	4	17.50	●
.768	7/8	-14	22.225	125	26	50	18.0	14.5	4	20.40	●
.769	1"	-12	25.400	140	32	52	18.0	14.5	5	23.30	●

Application	Material	<table> <tr> <th>UNF</th><th>ø</th><th>P</th><th>V_c</th><th>n</th><th>v_f</th><th>V_c</th><th>n</th><th>v_f</th><th>V_c</th><th>n</th><th>v_f</th></tr> <tr> <th></th><th>[mm]</th><th>[mm]</th><th>1.0 x d</th><th>[min⁻¹]</th><th>[100%]</th><th>1.5 x d</th><th>[min⁻¹]</th><th>[100%]</th><th>2.0 x d</th><th>[min⁻¹]</th><th>[100%]</th></tr> </table>												UNF	ø	P	V _c	n	v _f	V _c	n	v _f	V _c	n	v _f		[mm]	[mm]	1.0 x d	[min ⁻¹]	[100%]	1.5 x d	[min ⁻¹]	[100%]	2.0 x d	[min ⁻¹]	[100%]
UNF	ø	P	V _c	n	v _f	V _c	n	v _f	V _c	n	v _f																										
	[mm]	[mm]	1.0 x d	[min ⁻¹]	[100%]	1.5 x d	[min ⁻¹]	[100%]	2.0 x d	[min ⁻¹]	[100%]																										
	Steel 500 - 850 N/mm ²	6	-40	3.505	0.635	32	2905	1845	28	2545	1616	22	2000	1270																							
		8	-36	4.166	0.706	32	2445	1725	28	2140	1510	22	1680	1185																							
		10	-32	4.826	0.794	32	2110	1675	28	1845	1465	22	1450	1151																							
		12	-28	5.486	0.907	32	1855	1683	28	1625	1474	22	1275	1157																							
		1/4	-28	6.350	0.907	32	1605	1456	28	1405	1274	22	1105	1002																							
		5/16	-24	7.938	1.058	32	1285	1360	28	1125	1191	22	880	931																							
		3/8	-24	9.525	1.058	32	1070	1132	28	935	989	22	735	778																							
		7/16	-20	11.113	1.270	32	915	1162	28	800	1016	22	630	800																							
		1/2	-20	12.700	1.270	32	800	1016	28	700	889	22	550	699																							
		9/16	-18	14.288	1.411	32	715	1009	28	625	882	22	490	691																							
		5/8	-18	15.875	1.411	32	640	903	28	560	790	22	440	621																							
		3/4	-16	19.050	1.588	32	535	849	28	470	746	22	370	587																							
		7/8	-14	22.225	1.814	32	460	835	28	400	726	22	315	572																							
		1"	-12	25.400	2.117	32	400	847	28	350	741	22	275	582																							
	Steel 500 - 850 N/mm ²																																				
	Steel 850 - 1100 N/mm ²	6	-40	3.505	0.635	20	1815	1153	16	1455	924	10	910	578																							
		8	-36	4.166	0.706	20	1530	1080	16	1225	864	10	765	540																							
		10	-32	4.826	0.794	20	1320	1048	16	1055	837	10	660	524																							
		12	-28	5.486	0.907	20	1160	1052	16	930	844	10	580	526																							
		1/4	-28	6.350	0.907	20	1005	912	16	800	726	10	500	454																							
		5/16	-24	7.938	1.058	20	800	847	16	640	677	10	400	423																							
		3/8	-24	9.525	1.058	20	670	709	16	535	566	10	335	354																							
		7/16	-20	11.113	1.270	20	575	730	16	460	584	10	285	362																							
		1/2	-20	12.700	1.270	20	500	635	16	400	508	10	250	318																							
		9/16	-18	14.288	1.411	20	445	628	16	355	501	10	225	317																							
		5/8	-18	15.875	1.411	20	400	564	16	320	452	10	200	282																							
		3/4	-16	19.050	1.588	20	335	532	16	265	421	10	165	262																							
		7/8	-14	22.225	1.814	20	285	517	16	230	417	10	145	263																							
		1"	-12	25.400	2.117	20	250	529	16	200	423	10	125	265																							
	Steel 850 - 1100 N/mm ²																																				

UNF

2B




HSS PM/F









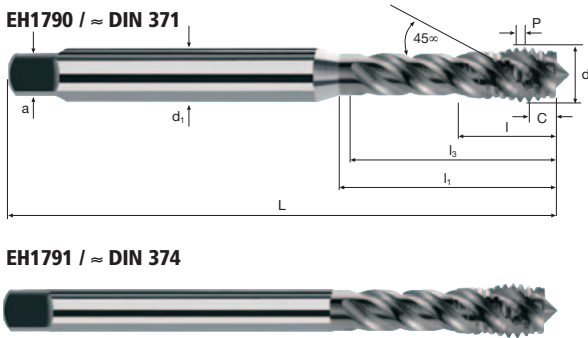

Rm < 850	Rm 850-1100											
-------------	----------------	--	--	--	--	--	--	--	--	--	--	--

Example: Order-Nº.												TiCN
Article-Nº. ø-Code												EH1790
ø Code	d	P(TPI)	d (mm)	L	l	l1	l3	d1	a			
.756	Nr. 6	-40	3.505	56	6	20	18	4.0	3.0	3	2.95	●
.757	Nr. 8	-36	4.166	63	7	21	19	4.5	3.4	3	3.50	●
.758	Nr. 10	-32	4.826	70	8	25	23	6.0	4.9	3	4.10	●
.759	Nr. 12	-28	5.486	80	10	30	28	6.0	4.9	3	4.60	●
.760	1/4	-28	6.350	80	10	30	28	7.0	5.5	3	5.50	●
.761	5/16	-24	7.938	90	13	35	33	8.0	6.2	3	6.90	●
.762	3/8	-24	9.525	100	15	39	37	10.0	8.0	3	8.50	●


Example: Order-Nº.												TiCN
Article-Nº. ø-Code												EH1791
ø Code	d	P(TPI)	d (mm)	L	l	l1	l3	d1	a			
.763	7/16	-20	11.113	100	15	39	37	8.0	6.2	4	9.90	●
.764	1/2	-20	12.700	100	15	39	37	9.0	7.0	4	11.50	●
.765	9/16	-18	14.288	100	15	39	37	11.0	9.0	4	12.90	●
.766	5/8	-18	15.875	100	15	39	37	12.0	9.0	4	14.50	●
.767	3/4	-16	19.050	110	17	50	48	14.0	11.0	4	17.50	●
.768	7/8	-14	22.225	125	18	65	63	18.0	14.5	5	20.40	●
.769	1"	-12	25.400	140	24	72	70	18.0	14.5	5	23.30	●



UNF

2B

HSS PM/F

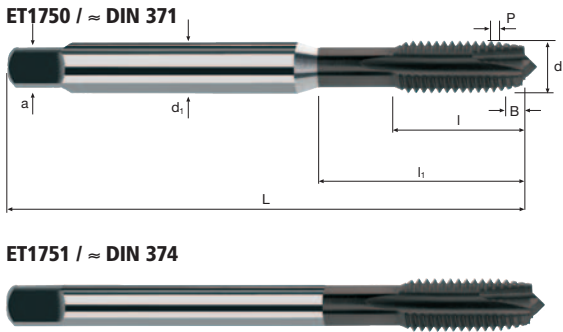

Example: Order-Nº.											TRIBO
Article-Nº. ø-Code											ET1750
ø Code	d	P(TPI)	d (mm)	L	l	l ₁	d ₁	a			
.756	Nr. 6	-40	3.505	56	12	20	4.0	3.0	3	3.00	●
.757	Nr. 8	-36	4.166	63	13	21	4.5	3.4	3	3.60	●
.758	Nr. 10	-32	4.826	70	15	25	6.0	4.9	3	4.20 *	●
.759	Nr. 12	-28	5.486	80	17	30	6.0	4.9	3	4.70	●
.760	1/4	-28	6.350	80	17	30	7.0	5.5	3	5.60 *	●
.761	5/16	-24	7.938	90	20	35	8.0	6.2	3	7.00	●
.762	3/8	-24	9.525	100	22	39	10.0	8.0	3	8.60	●

Example: Order-Nº.											TRIBO
Article-Nº. ø-Code											ET1751
ø Code	d	P(TPI)	d (mm)	L	l	l ₁	d ₁	a			
.763	7/16	-20	11.113	100	22	39	8.0	6.2	3	10.00	●
.764	1/2	-20	12.700	100	22	39	9.0	7.0	3	11.60	●
.765	9/16	-18	14.288	100	22	39	11.0	9.0	3	13.00	●
.766	5/8	-18	15.875	100	22	39	12.0	9.0	3	14.70 *	●
.767	3/4	-16	19.050	110	25	45	14.0	11.0	4	17.70 *	●
.768	7/8	-14	22.225	125	26	50	18.0	14.5	4	20.70 *	●
.769	1"	-12	25.400	140	32	52	18.0	14.5	4	23.50	●
* The given dimension is out of norm											

Taps x-tap




UNF

2B

HSS PM/F

Form C

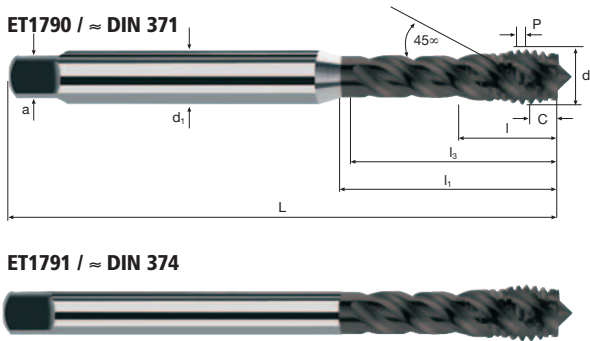


ET1791 / ≈ DIN 374




Article-Nº. ø-Code												TRIBO
Example: Order-Nº. ET1790 .756												ET1790
ø Code	d	P(TPI)	d (mm)	L	l	l1	l3	d1	a			
.756	Nr. 6	-40	3.505	56	6	20	18	4.0	3.0	3	3.00	●
.757	Nr. 8	-36	4.166	63	7	21	19	4.5	3.4	3	3.60	●
.758	Nr. 10	-32	4.826	70	8	25	23	6.0	4.9	3	4.20 *	●
.759	Nr. 12	-28	5.486	80	10	30	28	6.0	4.9	3	4.70	●
.760	1/4	-28	6.350	80	10	30	28	7.0	5.5	3	5.60 *	●
.761	5/16	-24	7.938	90	13	35	33	8.0	6.2	3	7.00	●
.762	3/8	-24	9.525	100	15	39	37	10.0	8.0	3	8.60	●

Article-Nº. ø-Code												TRIBO
Example: Order-Nº. ET1791 .763												ET1791
ø Code	d	P(TPI)	d (mm)	L	l	l1	l3	d1	a			
.763	7/16	-20	11.113	100	15	39	37	8.0	6.2	4	10.00	●
.764	1/2	-20	12.700	100	15	39	37	9.0	7.0	4	11.60	●
.765	9/16	-18	14.288	100	15	39	37	11.0	9.0	4	13.00	●
.766	5/8	-18	15.875	100	15	39	37	12.0	9.0	4	14.70 *	●
.767	3/4	-16	19.050	110	17	50	48	14.0	11.0	4	17.70 *	●
.768	7/8	-14	22.225	125	18	65	63	18.0	14.5	5	20.70 *	●
.769	1"	-12	25.400	140	24	72	70	18.0	14.5	5	23.50	●
* The given dimension is out of norm												

Application	Material	UNJF	ø [mm]	P [mm]	v _c 1.0 x d [min ⁻¹]	n [100%]	v _f [100%]	v _c 1.5 x d [min ⁻¹]	n [100%]	v _f [100%]		
	Nickel base alloys not hardened 	6	-40	3.505	0.635	3	270	171	2	180	114	
		8	-36	4.166	0.706	3	230	162	2	155	109	
		10	-32	4.826	0.794	3	200	159	2	130	103	
		1/4	-28	6.350	0.907	3	150	136	2	100	91	
		5/16	-24	7.938	1.058	3	120	127	2	80	85	
		3/8	-24	9.525	1.058	3	100	106	2	65	69	
	Nickel base alloys hardened	6	-40	3.505	0.635	2	180	114	2	180	114	
		8	-36	4.166	0.706	2	155	109	2	155	109	
		10	-32	4.826	0.794	2	130	103	2	130	103	
		1/4	-28	6.350	0.907	2	100	91	2	100	91	
		5/16	-24	7.938	1.058	2	80	85	2	80	85	
		3/8	-24	9.525	1.058	2	65	69	2	65	69	

Application	Material										
	Nickel base alloys not hardened										
		6	-40	3.505	0.635	3	270	171	2	180	114
		8	-36	4.166	0.706	3	230	162	2	155	109
		10	-32	4.826	0.794	3	200	159	2	130	103
		1/4	-28	6.350	0.907	3	150	136	2	100	91
		5/16	-24	7.938	1.058	3	120	127	2	80	85
		3/8	-24	9.525	1.058	3	100	106	2	65	69
	Nickel base alloys hardened										
		6	-40	3.505	0.635	2	180	114	2	180	114
		8	-36	4.166	0.706	2	155	109	2	155	109
		10	-32	4.826	0.794	2	130	103	2	130	103
		1/4	-28	6.350	0.907	2	100	91	2	100	91
		5/16	-24	7.938	1.058	2	80	85	2	80	85
		3/8	-24	9.525	1.058	2	65	69	2	65	69

3B

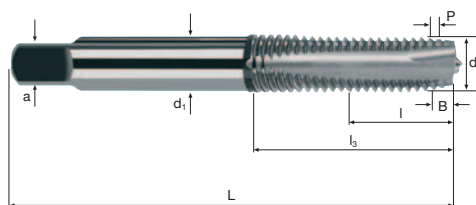

Nickel-Alloys

UN

[illegible]




Unified pipe thread conical NPT / NPTF

NPT					
N° ET1830					339
N° E11820					341

NPTF					
N° E11846					343

NPT
NPTF

Application



Material

Stainless steel
ferritic/martensitic



Stainless steel
[Cr-Ni/1.4301]




Stainless steel
[Cr-Ni-Mo-.../1.4571]



Heat resistant steel
[17-4 PH]




NPT	ø [mm]	P [mm]	v_c	n [min ⁻¹]	v_f [100%]		
1/16 -27	6.25	0.941	2	100	94		
1/8 -27	8.50	0.941	2	75	71		
1/4 -18	11.10	1.411	2	55	78		
3/8 -18	14.70	1.411	2	45	63		
1/2 -14	18.00	1.814	2	35	63		
3/4 -14	23.25	1.814	2	25	45		
1" -11.5	29.25	2.209	2	20	44		
1/16 -27	6.25	0.941	2	100	94		
1/8 -27	8.50	0.941	2	75	71		
1/4 -18	11.10	1.411	2	55	78		
3/8 -18	14.70	1.411	2	45	63		
1/2 -14	18.00	1.814	2	35	63		
3/4 -14	23.25	1.814	2	25	45		
1" -11.5	29.25	2.209	2	20	44		
1/16 -27	6.25	0.941	2	100	94		
1/8 -27	8.50	0.941	2	75	71		
1/4 -18	11.10	1.411	2	55	78		
3/8 -18	14.70	1.411	2	45	63		
1/2 -14	18.00	1.814	2	35	63		
3/4 -14	23.25	1.814	2	25	45		
1" -11.5	29.25	2.209	2	20	44		
1/16 -27	6.25	0.941	1.5	75	71		
1/8 -27	8.50	0.941	1.5	55	52		
1/4 -18	11.10	1.411	1.5	45	63		
3/8 -18	14.70	1.411	1.5	30	42		
1/2 -14	18.00	1.814	1.5	25	45		
3/4 -14	23.25	1.814	1.5	20	36		
1" -11.5	29.25	2.209	1.5	15	33		

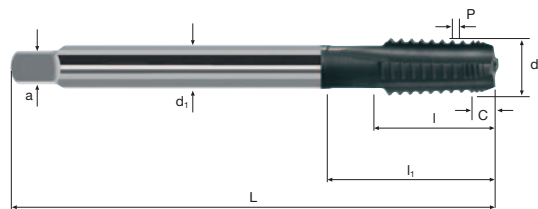

Inox
Stainless

NPT
NPTF

Application



Material

Steel
< 500 N/mm²



Steel
500 - 850 N/mm²



Steel
850 - 1100 N/mm²

A small, stylized icon of a steel drop or droplet, colored in a gradient of blue and purple, located at the bottom left of the Steel section.

Wrought aluminium alloys Si < 6% hardened

[illegible]

Material

Cast iron
GG(G)


A small icon of a red and orange flame or drop shape inside a blue square.[illegible]



Metric coarse thread for inserts EG M

Tolerance 6H mod

N° E11970 / E11971



HSS-E
Co5



Rm
<850

Al
Aluminium
Alloy

347

N° E11980 / E11981



HSS-E
Co5



Rm
<850

Al
Aluminium
Alloy

349

Taps for inserts




EG M

DIN 371/376

6H mod

HSS-E Co5

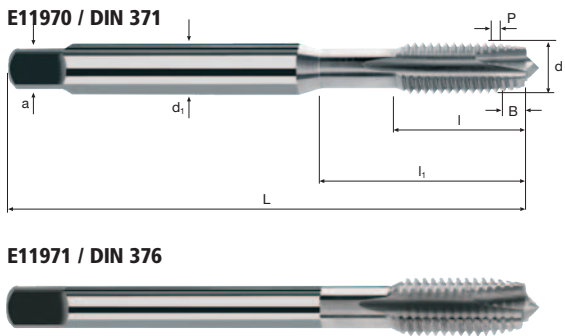

Rm < 850

Al Aluminium > 99%

Al Aluminium Alloy

Al Aluminium Cast

Cu Copper

Plastic Thermoplast


GG(G)

Example: Order-Nº. Article-Nº. E11970 ø-Code .034										E11970	
Ø Code	d	P	L	l	l1	d1	a				
.034	EGM 2	0.40	50	9	15	2.8	2.1	2	2.15	●	
.040	EGM 2.5	0.45	56	12	18	3.5	2.7	3	2.65	●	
.044	EGM 3	0.50	63	13	21	4.5	3.0	3	3.15	●	
.058	EGM 4	0.70	70	15	25	6.0	4.9	3	4.20	●	
.084	EGM 5	0.80	80	17	30	6.0	4.9	3	5.25	●	
.088	EGM 6	1.00	90	20	35	8.0	6.2	3	6.30	●	
.160	EGM 8	1.25	100	22	39	10.0	8.0	3	8.40	●	

EG

Example: Order-Nº. Article-Nº. E11971 ø-Code .174										E11971	
Ø Code	d	P	L	l	l1	d1	a				
.174	EGM10	1.50	110	24	40	9.0	7.0	3	10.40	●	
.240	EGM12	1.75	110	26	40	11.0	9.0	3	12.50	●	
.244	EGM14	2.00	110	27	40	12.0	9.0	4	14.50	●	
.246	EGM16	2.00	125	30	65	14.0	11.0	4	16.50	●	

[illegible][illegible]

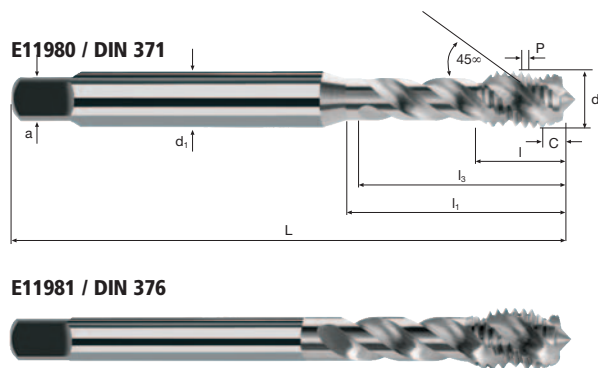6H
mod

E11981 / DIN 376

Al
Aluminium
> 99%

Al
Aluminium
Alloy

Al
Aluminium
Cast

Cu
Copper

Plastic Thermoplast

GG(G)

[illegible][illegible]



Cold forming taps _M

Tolerance ISO 2 (6H)

N° EF10060 / EF10061



N° EH6100 / EH6101

duroform



N° EL10080 / EL10081



N° EH10070 / EH10071



N° EH10072 / EH10073



new!

Al	HSS PM/F		Al Aluminium Alloy	Cu Copper	355
U	HM MG10		Rm <850-1100	Al Aluminium Alloy	359
St	HSS PM/F		Rm <850		361
St	HSS PM/F		Rm <850		365
St	HSS PM/F		Rm <850		369

Tolerance ISO 3 (6G)

N° EF10064 / EF10065



N° EH10074 / EH10075



Al	HSS PM/F		Al Aluminium Alloy	Cu Copper	371
St	HSS PM/F		Rm <850		373

Tolerance 7G

N° EF10068



N° EH10078



Al	HSS PM/F		Al Aluminium Alloy	Cu Copper	375
St	HSS PM/F		Rm <850		377

CF



Cold forming taps MF

Tolerance ISO 2 (6H)						
N° EF11260 / EF11261						379
N° EH11270 / EH11271						381


Cold forming taps for inserts EG M

Tolerance 6H mod						
N° EF11960 / EF11961						383
N° EH11950 / EH11951						385


CF

AI

**ISO 2
(6H)**

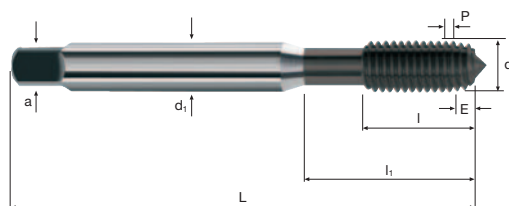

Application



Material

Unalloyed aluminium

Wrought aluminium alloys Si < 6%
not hardened

Unalloyed copper




Non ferrous metal
 $A_5 > 15\%$

[illegible]

AI

ISO 2
(6H)

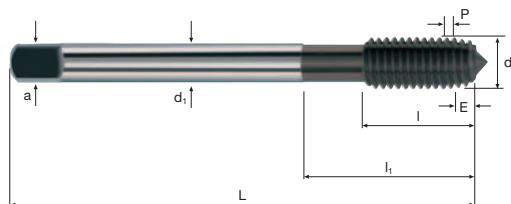

CF




M

ISO 2
(6H)

HM
MG10

Form E

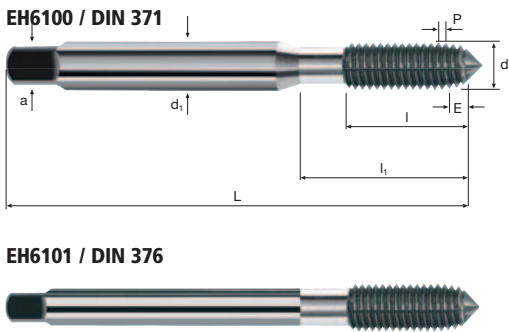


Rm < 850	Rm 850-1100						Inox Stainless		Aluminium Copper
-------------	----------------	--	--	--	--	--	-------------------	--	---------------------

Example: Order-Nº.											TiCN		
Article-Nº. EH6100										ø-Code .044			EH6100
Ø Code	d	P	L	l	l ₁	d ₁	a						
.044	M 3	0.50	56	12	18	3.5	2.7	3	2.80		●		
.058	M 4	0.70	63	13	21	4.5	3.4	4	3.70		●		
.084	M 5	0.80	70	15	25	6.0	4.9	4	4.60		●		
.088	M 6	1.00	80	17	30	6.0	4.9	4	5.50		●		
.160	M 8	1.25	90	20	35	8.0	6.2	5	7.40		●		
.174	M10	1.50	100	22	39	10.0	8.0	5	9.30		●		

Example: Order-N°.										Article-N°.		ø-Code				TiCN
										EH6101						EH6101
Ø Code	d	P	L	l	l ₁	d ₁	a									
.240	M12	1.75	110	24	50	9.0	7.0	7	11.20					●		

CF

**ISO 2
(6H)**

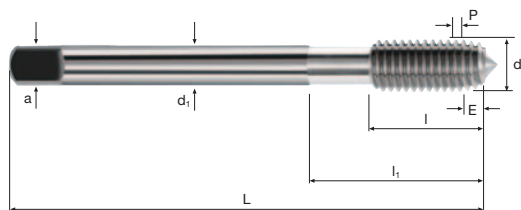


**new
quality**

Rm
850-1100

Inox
Stainless

[illegible]

CF

Application	Material	M	ø [mm]	P [mm]	v_c 1.5 x d [min ⁻¹]	v_f [100%]	v_c 2.0 x d [min ⁻¹]	v_f [100%]	v_c 3.0 x d [min ⁻¹]	v_f [100%]
	Steel < 850 N/mm ² A _S > 10%	M 6	6.0	1.00	25	1325	1325	20	1060	1060
		M 8	8.0	1.25	25	995	1244	20	795	994
		M10	10.0	1.50	25	795	1193	20	635	953
		M12	12.0	1.75	25	665	1164	20	530	928
		M14	14.0	2.00	25	570	1140	20	455	910
		M16	16.0	2.00	25	495	990	20	400	800
	Steel 850 - 1100 N/mm ² A _S > 10%	M 6	6.0	1.00	15	795	795	10	530	530
		M 8	8.0	1.25	15	595	744	10	400	500
		M10	10.0	1.50	15	475	713	10	320	480
		M12	12.0	1.75	15	400	700	10	265	464
		M14	14.0	2.00	15	340	680	10	225	450
		M16	16.0	2.00	15	300	600	10	200	400
	Stainless steel ferritic/martensitic A _S > 10%	M 6	6.0	1.00	15	795	795	10	530	530
		M 8	8.0	1.25	15	595	744	10	400	500
		M10	10.0	1.50	15	475	713	10	320	480
		M12	12.0	1.75	15	400	700	10	265	464
		M14	14.0	2.00	15	340	680	10	225	450
		M16	16.0	2.00	15	300	600	10	200	400
	Stainless steel [Cr-Ni/1.4301]	M 6	6.0	1.00	15	795	795	10	530	530
		M 8	8.0	1.25	15	595	744	10	400	500
		M10	10.0	1.50	15	475	713	10	320	480
		M12	12.0	1.75	15	400	700	10	265	464
		M14	14.0	2.00	15	340	680	10	225	450
		M16	16.0	2.00	15	300	600	10	200	400

Cold forming taps

Incool




M

ISO 2
(6H)

HSS
PM/F

Form E

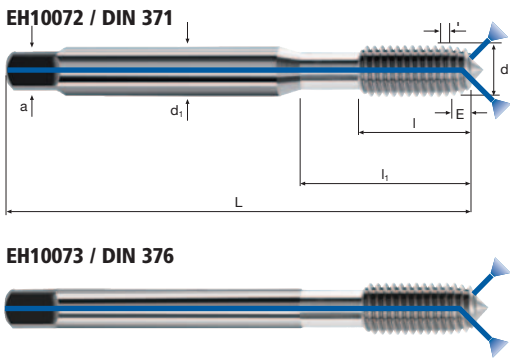

Rm
< 850


Rm
850-1100

Inox
Stainless

Example: Order-N°.										TiCN
Article-N°.										EH10072
Ø Code	d	P	L	l	l ₁	d ₁	a			
.088	M 6	1.00	80	17	30	6	4.9	4	5.50	●
.160	M 8	1.25	90	20	35	8	6.2	5	7.40	●
.174	M10	1.50	100	22	39	10	8.0	5	9.30	●

Example: Order-N°.										TiCN
Article-N°.										EH10073
Ø Code	d	P	L	l	l ₁	d ₁	a			
.240	M12	1.75	110	24	50	9	7.0	7	11.20	●
.244	M14	2.00	110	26	58	11	9.0	7	13.10	●
.246	M16	2.00	110	27	58	12	9.0	7	15.10	●

CF



Material
Unalloyed aluminium
Unalloyed aluminium
Wrought aluminium alloys Si < 6% not hardened
Wrought aluminium alloys Si < 6% not hardened

M	ø [mm]	P [mm]	v_c 1.5 x d	n [min ⁻¹]	v_f [100%]	v_c 2.0 x d	n [min ⁻¹]	v_f [100%]	v_c 3.0 x d	n [min ⁻¹]	v_f [100%]
M 2	2.0	0.40	25	3980	1592	20	3185	1274	15	2385	954
M 2.2	2.2	0.45	25	3615	1627	20	2895	1303	15	2170	977
M 2.5	2.5	0.45	25	3185	1433	20	2545	1145	15	1910	860
M 3	3.0	0.50	25	2655	1328	20	2120	1060	15	1590	795
M 4	4.0	0.70	25	1990	1393	20	1590	1113	15	1195	837
M 5	5.0	0.80	25	1590	1272	20	1275	1020	15	955	764
M 6	6.0	1.00	25	1325	1325	20	1060	1060	15	795	795
M 8	8.0	1.25	25	995	1244	20	795	994	15	595	744
M10	10.0	1.50	25	795	1193	20	635	953	15	475	713
M12	12.0	1.75	25	665	1164	20	530	928	15	400	700
M14	14.0	2.00	25	570	1140	20	455	910	15	340	680
M16	16.0	2.00	25	495	990	20	400	800	15	300	600
M 2	2.0	0.40	30	4775	1910	25	3980	1592	20	3185	1274
M 2.2	2.2	0.45	30	4340	1953	25	3615	1627	20	2895	1303
M 2.5	2.5	0.45	30	3820	1719	25	3185	1433	20	2545	1145
M 3	3.0	0.50	30	3185	1593	25	2655	1328	20	2120	1060
M 4	4.0	0.70	30	2385	1670	25	1990	1393	20	1590	1113
M 5	5.0	0.80	30	1910	1528	25	1590	1272	20	1275	1020
M 6	6.0	1.00	30	1590	1590	25	1325	1325	20	1060	1060
M 8	8.0	1.25	30	1195	1494	25	995	1244	20	795	994
M10	10.0	1.50	30	955	1433	25	795	1193	20	635	953
M12	12.0	1.75	30	795	1391	25	665	1164	20	530	928
M14	14.0	2.00	30	680	1360	25	570	1140	20	455	910
M16	16.0	2.00	30	595	1190	25	495	990	20	400	800

Material
Unalloyed copper
Unalloyed copper
Non ferrous metal A _S > 15%
Non ferrous metal A _S > 15%

M	ø [mm]	P [mm]	v_c 1.5 x d	n [min ⁻¹]	v_f [100%]	v_c 2.0 x d	n [min ⁻¹]	v_f [100%]	v_c 3.0 x d	n [min ⁻¹]	v_f [100%]
M 2	2.0	0.40	15	2385	954	10	1590	636	10	1590	636
M 2.2	2.2	0.45	15	2170	977	10	1445	650	10	1445	650
M 2.5	2.5	0.45	15	1910	860	10	1275	574	10	1275	574
M 3	3.0	0.50	15	1590	795	10	1060	530	10	1060	530
M 4	4.0	0.70	15	1195	837	10	795	557	10	795	557
M 5	5.0	0.80	15	955	764	10	635	508	10	635	508
M 6	6.0	1.00	15	795	795	10	530	530	10	530	530
M 8	8.0	1.25	15	595	744	10	400	500	10	400	500
M10	10.0	1.50	15	475	713	10	320	480	10	320	480
M12	12.0	1.75	15	400	700	10	265	464	10	265	464
M14	14.0	2.00	15	340	680	10	225	450	10	225	450
M16	16.0	2.00	15	300	600	10	200	400	10	200	400
M 2	2.0	0.40	15	2385	954	10	1590	636	10	1590	636
M 2.2	2.2	0.45	15	2170	977	10	1445	650	10	1445	650
M 2.5	2.5	0.45	15	1910	860	10	1275	574	10	1275	574
M 3	3.0	0.50	15	1590	795	10	1060	530	10	1060	530
M 4	4.0	0.70	15	1195	837	10	795	557	10	795	557
M 5	5.0	0.80	15	955	764	10	635	508	10	635	508
M 6	6.0	1.00	15	795	795	10	530	530	10	530	530
M 8	8.0	1.25	15	595	744	10	400	500	10	400	500
M10	10.0	1.50	15	475	713	10	320	480	10	320	480
M12	12.0	1.75	15	400	700	10	265	464	10	265	464
M14	14.0	2.00	15	340	680	10	225	450	10	225	450
M16	16.0	2.00	15	300	600	10	200	400	10	200	400

Cold forming taps




M

ISO 3
(6G)

HSS
PM/F

Form E

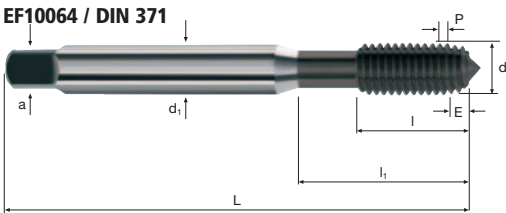

Al
Aluminium
> 99%

Al
Aluminium
Alloy

Cu
Copper

CuZn Brass

Example: Order-Nº. EF10064 .034											F-DLC
											EF10064
Ø Code	d	P	L	l	l ₁	d ₁	a				
.034	M 2	0.40	45	8	—	2.8	2.1	3	1.80		●
.036	M 2.2	0.45	45	9	—	2.8	2.1	3	2.00		●
.040	M 2.5	0.45	50	9	—	2.8	2.1	3	2.30		●
.044	M 3	0.50	56	12	18.0	3.5	2.7	3	2.80		●
.058	M 4	0.70	63	13	21.0	4.5	3.4	3	3.70		●
.084	M 5	0.80	70	15	25.0	6.0	4.9	4	4.60		●
.088	M 6	1.00	80	17	30.0	6.0	4.9	4	5.50		●
.160	M 8	1.25	90	20	35.0	8.0	6.2	4	7.40		●
.174	M10	1.50	100	22	39.0	10.0	8.0	4	9.30		●

Example: Order-Nº. EF10065 .240											F-DLC
											EF10065
Ø Code	d	P	L	l	l ₁	d ₁	a				
.240	M12	1.75	110	24	40.0	9.0	7.0	5	11.20		●
.244	M14	2.00	110	26	40.0	11.0	9.0	5	13.10		●
.246	M16	2.00	110	27	40.0	12.0	9.0	5	15.10		●

CF

Cold forming taps




M

ISO 3
(6G)

HSS
PM/F

Form E

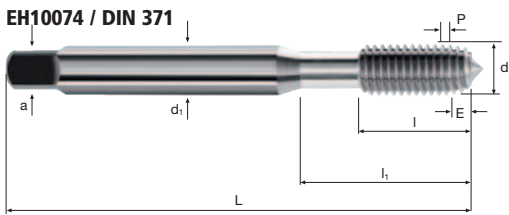

EH10075 / DIN 376



Rm
< 850

Rm
850-1100

Inox
Stainless


Example: Order-Nº. Article-Nº. EH10074 ø-Code .034											TiCN
											EH10074
Ø Code	d	P	L	l	l ₁	d ₁	a				
.034	M 2	0.40	45	8	—	2.8	2.1	3	1.80		●
.036	M 2.2	0.45	45	9	—	2.8	2.1	3	2.00		●
.040	M 2.5	0.45	50	9	—	2.8	2.1	3	2.30		●
.044	M 3	0.50	56	12	18.0	3.5	2.7	3	2.80		●
.058	M 4	0.70	63	13	21.0	4.5	3.4	3	3.70		●
.084	M 5	0.80	70	15	25.0	6.0	4.9	4	4.60		●
.088	M 6	1.00	80	17	30.0	6.0	4.9	4	5.50		●
.160	M 8	1.25	90	20	35.0	8.0	6.2	5	7.40		●
.174	M10	1.50	100	22	39.0	10.0	8.0	5	9.30		●

Example: Order-Nº. Article-Nº. EH10075 ø-Code .240											TiCN
											EH10075
Ø Code	d	P	L	l	l ₁	d ₁	a				
.240	M12	1.75	110	24	40	9.0	7.0	7	11.20		●
.244	M14	2.00	110	26	40	11.0	9.0	7	13.10		●
.246	M16	2.00	110	27	40	12.0	9.0	7	15.10		●

CF

AI

7G






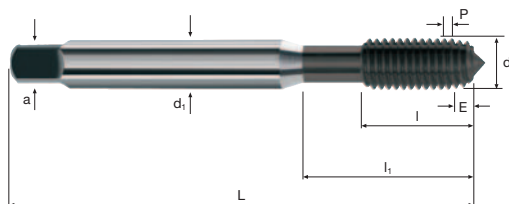


Cu
Copper

CuZn Brass


[illegible]

CF

Application	Material																		
	Steel $< 850 \text{ N/mm}^2$ $A_s > 10\%$	M	ϕ [mm]	P [mm]	v_c $1.5 \times d$	n [min ⁻¹]	v_f [100%]	v_c $2.0 \times d$	n [min ⁻¹]	v_f [100%]	v_c $3.0 \times d$	n [min ⁻¹]	v_f [100%]	v_c $1.5 \times d$	n [min ⁻¹]	v_f [100%]	v_c $2.0 \times d$	n [min ⁻¹]	v_f [100%]
		M 2	2.0	0.40	20	3185	1274	15	2385	954	10	1590	636						
		M 2.2	2.2	0.45	20	2895	1303	15	2170	977	10	1445	650						
		M 2.5	2.5	0.45	20	2545	1145	15	1910	860	10	1275	574						
		M 3	3.0	0.50	20	2120	1060	15	1590	795	10	1060	530						
	Steel $850 - 1100 \text{ N/mm}^2$ $A_s > 10\%$ 	M 4	4.0	0.70	20	1590	1113	15	1195	837	10	795	557						
		M 5	5.0	0.80	20	1275	1020	15	955	764	10	635	508						
		M 6	6.0	1.00	20	1060	1060	15	795	795	10	530	530						
		M 8	8.0	1.25	20	795	994	15	595	744	10	400	500						
		M10	10.0	1.50	20	635	953	15	475	713	10	320	480						
	Stainless steel ferritic/martensitic $A_s > 10\%$ 	M 2	2.0	0.40	15	2385	954	10	1590	636									
		M 2.2	2.2	0.45	15	2170	977	10	1445	650									
		M 2.5	2.5	0.45	15	1910	860	10	1275	574									
		M 3	3.0	0.50	15	1590	795	10	1060	530									
		M 4	4.0	0.70	15	1195	837	10	795	557									
	Stainless steel [Cr-Ni/1.4301] 	M 5	5.0	0.80	15	955	764	10	635	508									
		M 6	6.0	1.00	15	795	795	10	530	530									
		M 8	8.0	1.25	15	595	744	10	400	500									
		M10	10.0	1.50	15	475	713	10	320	480									
		M 2	2.0	0.40	15	2385	954	10	1590	636									
	Stainless steel [Cr-Ni/1.4301]	M 2.2	2.2	0.45	15	2170	977	10	1445	650									
		M 2.5	2.5	0.45	15	1910	860	10	1275	574									
		M 3	3.0	0.50	15	1590	795	10	1060	530									
		M 4	4.0	0.70	15	1195	837	10	795	557									
		M 5	5.0	0.80	15	955	764	10	635	508									
	Stainless steel [Cr-Ni/1.4301]	M 6	6.0	1.00	15	795	795	10	530	530									
		M 8	8.0	1.25	15	595	744	10	400	500									
		M10	10.0	1.50	15	475	713	10	320	480									
		M 2	2.0	0.40	15	2385	954	10	1590	636									
		M 2.2	2.2	0.45	15	2170	977	10	1445	650									

St

7G

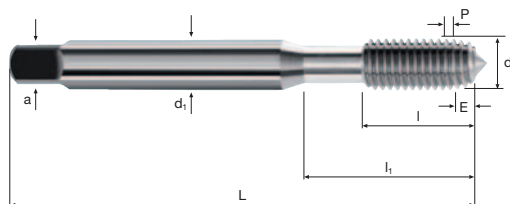

< 850

850-1100

Stainless

[illegible]

CF

Cold forming taps




MF

ISO 2
(6H)

HSS
PM/F

Form E

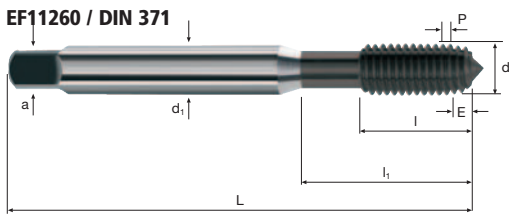

Al
Aluminium
> 99%

Al
Aluminium
Alloy


Cu
Copper

CuZn Brass

Example: Order-Nº. EF11260 .046										F-DLC
Article-Nº. EF11260 ø-Code .046										EF11260
Ø Code	d	P	L	l	l ₁	d ₁	a			
.046	M 4	0.50	63	13	21	4.5	3.4	3	3.80	●
.048	M 5	0.50	70	15	25	6.0	4.9	4	4.80	●
.050	M 6	0.50	80	17	30	6.0	4.9	4	5.80	●
.064	M 6	0.75	80	17	30	6.0	4.9	4	5.65	●
.066	M 8	0.75	90	20	35	8.0	6.2	4	7.65	●
.068	M10	0.75	100	22	39	10.0	8.0	4	9.65	●
.090	M 8	1.00	90	20	35	8.0	6.2	4	7.55	●
.092	M10	1.00	100	22	39	10.0	8.0	4	9.55	●
.162	M10	1.25	100	22	39	10.0	8.0	4	9.40	●

Example: Order-Nº. EF11261 .094										F-DLC
Article-Nº. EF11261 ø-Code .094										EF11261
Ø Code	d	P	L	l	l ₁	d ₁	a			
.094	M12	1.00	100	18	39	9.0	7.0	5	11.50	●
.096	M14	1.00	100	18	39	11.0	9.0	5	13.50	●
.098	M16	1.00	100	18	39	12.0	9.0	5	15.50	●
.164	M12	1.25	100	22	39	9.0	7.0	5	11.40	●
.176	M12	1.50	100	22	39	9.0	7.0	5	11.30	●
.178	M14	1.50	100	22	39	11.0	9.0	5	13.30	●
.182	M16	1.50	100	22	39	12.0	9.0	5	15.30	●
.184	M20	1.50	125	26	50	16.0	12.0	6	19.30	●

CF

Application	Material	MF	ø [mm]	P [mm]	v_c 1.5 x d [m·min ⁻¹]	n [min ⁻¹]	v_f [100%]	v_c 2.0 x d [m·min ⁻¹]	n [min ⁻¹]	v_f [100%]	v_c 3.0 x d [m·min ⁻¹]	n [min ⁻¹]	v_f [100%]
	Steel < 850 N/mm ² $A_S > 10\%$	M 4	4.0	0.50	20	1590	795	15	1195	598	10	795	398
		M 5	5.0	0.50	20	1275	638	15	955	478	10	635	318
		M 6	6.0	0.50	20	1060	530	15	795	398	10	530	265
		M 6	6.0	0.75	20	1060	795	15	795	596	10	530	398
		M 8	8.0	0.75	20	795	596	15	595	446	10	400	300
		M10	10.0	0.75	20	635	476	15	475	356	10	320	240
		M 8	8.0	1.00	20	795	795	15	595	595	10	400	400
		M10	10.0	1.00	20	635	635	15	475	475	10	320	320
		M10	10.0	1.25	20	635	794	15	475	594	10	320	400
		M12	12.0	1.00	20	530	530	15	400	400	10	265	265
	Steel < 850 N/mm ² $A_S > 10\%$	M14	14.0	1.00	20	455	455	15	340	340	10	225	225
		M16	16.0	1.00	20	400	400	15	300	300	10	200	200
		M12	12.0	1.25	20	530	663	15	400	500	10	265	331
		M12	12.0	1.50	20	530	795	15	400	600	10	265	398
		M14	14.0	1.50	20	455	683	15	340	510	10	225	338
		M16	16.0	1.50	20	400	600	15	300	450	10	200	300
		M20	20.0	1.50	20	320	480	15	240	360	10	160	240
		M 4	4.0	0.50	15	1195	598	10	795	398			
		M 5	5.0	0.50	15	955	478	10	635	318			
		M 6	6.0	0.50	15	795	398	10	530	265			
	Steel 850 - 1100 N/mm ² $A_S > 10\%$	M 6	6.0	0.75	15	795	596	10	530	398			
		M 8	8.0	0.75	15	595	446	10	400	300			
		M10	10.0	0.75	15	475	356	10	320	240			
		M 8	8.0	1.00	15	595	595	10	400	400			
		M10	10.0	1.00	15	475	475	10	320	320			
		M10	10.0	1.25	15	475	594	10	320	400			
		M12	12.0	1.00	15	400	400	10	265	265			
		M14	14.0	1.00	15	340	340	10	225	225			
		M16	16.0	1.00	15	300	300	10	200	200			
		M12	12.0	1.25	15	400	500	10	265	331			
	Steel 850 - 1100 N/mm ² $A_S > 10\%$	M12	12.0	1.50	15	400	600	10	265	398			
		M14	14.0	1.50	15	340	510	10	225	338			
		M16	16.0	1.50	15	300	450	10	200	300			
		M20	20.0	1.50	15	240	360	10	160	240			
Material		MF	ø [mm]	P [mm]	v_c 1.5 x d [m·min ⁻¹]	n [min ⁻¹]	v_f [100%]	v_c 2.0 x d [m·min ⁻¹]	n [min ⁻¹]	v_f [100%]			
	Stainless steel ferritic/martensitic $A_S > 10\%$	M 4	4.0	0.50	15	1195	598	10	795	398			
		M 5	5.0	0.50	15	955	478	10	635	318			
		M 6	6.0	0.50	15	795	398	10	530	265			
		M 6	6.0	0.75	15	795	596	10	530	398			
		M 8	8.0	0.75	15	595	446	10	400	300			
		M10	10.0	0.75	15	475	356	10	320	240			
		M 8	8.0	1.00	15	595	595	10	400	400			
		M10	10.0	1.00	15	475	475	10	320	320			
		M10	10.0	1.25	15	475	594	10	320	400			
		M12	12.0	1.00	15	400	400	10	265	265			
	Stainless steel ferritic/martensitic $A_S > 10\%$	M14	14.0	1.00	15	340	340	10	225	225			
		M16	16.0	1.00	15	300	300	10	200	200			
		M12	12.0	1.25	15	400	500	10	265	331			
		M12	12.0	1.50	15	400	600	10	265	398			
		M14	14.0	1.50	15	340	510	10	225	338			
		M16	16.0	1.50	15	300	450	10	200	300			
		M20	20.0	1.50	15	240	360	10	160	240			
		M 4	4.0	0.50	15	1195	598	10	795	398			
		M 5	5.0	0.50	15	955	478	10	635	318			
		M 6	6.0	0.50	15	795	398	10	530	265			
	Stainless steel [Cr-Ni/1.4301]	M 6	6.0	0.75	15	795	596	10	530	398			
		M 8	8.0	0.75	15	595	446	10	400	300			
		M10	10.0	0.75	15	475	356	10	320	240			
		M 8	8.0	1.00	15	595	595	10	400	400			
		M10	10.0	1.00	15	475	475	10	320	320			
		M10	10.0	1.25	15	475	594	10	320	400			
		M12	12.0	1.00	15	400	400	10	265	265			
		M14	14.0	1.00	15	340	340	10	225	225			
		M16	16.0	1.00	15	300	300	10	200	200			
		M12	12.0	1.25	15	400	500	10	265	331			
	Stainless steel [Cr-Ni/1.4301]	M12	12.0	1.50	15	400	600	10	265	398			
		M14	14.0	1.50	15	340	510	10	225	338			
		M16	16.0	1.50	15	300	450	10	200	300			
		M20	20.0	1.50	15	240	360	10	160	240			

Cold forming taps




MF

ISO 2
(6H)

HSS
PM/F

Form E

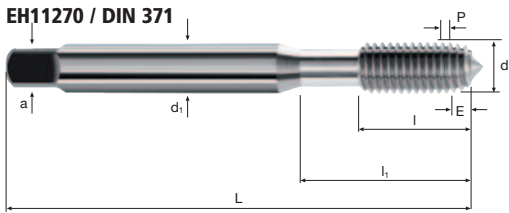

EH11271 / DIN 374




Rm < 850	Rm 850-1100							Inox Stainless		
-------------	----------------	--	--	--	--	--	--	-------------------	--	--

Example: Order-Nº. EH11270 .046										TiCN
Article-Nº. EH11270 ø-Code .046										EH11270
Ø Code	d	P	L	I	I ₁	d ₁	a			
.046	M 4	0.50	63	13	21	4.5	2.1	4	3.80	●
.048	M 5	0.50	70	15	25	6.0	2.7	4	4.80	●
.050	M 6	0.50	80	17	30	6.0	3.4	4	5.80	●
.064	M 6	0.75	80	17	30	6.0	3.4	4	5.65	●
.066	M 8	0.75	90	20	35	8.0	4.9	5	7.65	●
.068	M10	0.75	100	22	39	10.0	5.5	5	9.65	●
.090	M 8	1.00	90	20	35	8.0	4.9	5	7.55	●
.092	M10	1.00	100	22	39	10.0	5.5	5	9.55	●
.162	M10	1.25	100	22	39	10.0	5.5	5	9.40	●

Example: Order-Nº. EH11271 .094										TiCN
Article-Nº. EH11271 ø-Code .094										EH11271
Ø Code	d	P	L	I	I ₁	d ₁	a			
.094	M12	1.00	100	18	39	9.0	7.0	7	11.50	●
.096	M14	1.00	100	18	39	11.0	9.0	7	13.50	●
.098	M16	1.00	100	18	39	12.0	9.0	7	15.50	●
.164	M12	1.25	100	22	39	9.0	7.0	7	11.40	●
.176	M12	1.50	100	22	39	9.0	7.0	7	11.30	●
.178	M14	1.50	100	22	39	11.0	9.0	7	13.30	●
.180	M16	1.50	100	22	39	12.0	9.0	7	15.30	●
.184	M20	1.50	125	26	50	16.0	12.0	7	19.30	●

CF

Application



Material

Unalloyed aluminium

Wrought aluminium
alloys Si < 6%
not hardened

Unalloyed copper



Non ferrous metal
 $A_5 > 15\%$



EG-M	ø [mm]	P [mm]	V_c 1.5 x d [min ⁻¹]			V_c 2.0 x d [min ⁻¹]			V_c 3.0 x d [min ⁻¹]		
			n [min ⁻¹]	v_f [100%]		n [min ⁻¹]	v_f [100%]		n [min ⁻¹]	v_f [100%]	
EGM 3	3.650	0.50	25	2180	1090	20	1745	873	15	1310	655
EGM 4	4.910	0.70	25	1620	1134	20	1295	906	15	970	679
EGM 5	6.040	0.80	25	1320	1056	20	1055	844	15	790	632
EGM 6	7.300	1.00	25	1090	1090	20	870	870	15	655	655
EGM 8	9.624	1.25	25	825	1031	20	660	825	15	495	619
EGM 10	11.948	1.50	25	665	998	20	535	803	15	400	600
EGM 12	14.274	1.75	25	555	971	20	445	779	15	335	586
EGM 3	3.650	0.50	30	2615	1308	25	2180	1090	20	1745	873
EGM 4	4.910	0.70	30	1945	1362	25	1620	1134	20	1295	906
EGM 5	6.040	0.80	30	1580	1264	25	1320	1056	20	1055	844
EGM 6	7.300	1.00	30	1310	1310	25	1090	1090	20	870	870
EGM 8	9.624	1.25	30	990	1238	25	825	1031	20	660	825
EGM 10	11.948	1.50	30	800	1200	25	665	998	20	535	803
EGM 12	14.274	1.75	30	670	1173	25	555	971	20	445	779
EGM 3	3.650	0.50	15	1310	655	10	870	435	10	870	435
EGM 4	4.910	0.70	15	970	679	10	650	455	10	650	455
EGM 5	6.040	0.80	15	790	632	10	525	420	10	525	420
EGM 6	7.300	1.00	15	655	655	10	435	435	10	435	435
EGM 8	9.624	1.25	15	495	619	10	330	413	10	330	413
EGM 10	11.948	1.50	15	400	600	10	265	398	10	265	398
EGM 12	14.274	1.75	15	335	586	10	225	394	10	225	394
EGM 3	3.650	0.50	15	1310	655	10	870	435	10	870	435
EGM 4	4.910	0.70	15	970	679	10	650	455	10	650	455
EGM 5	6.040	0.80	15	790	632	10	525	420	10	525	420
EGM 6	7.300	1.00	15	655	655	10	435	435	10	435	435
EGM 8	9.624	1.25	15	495	619	10	330	413	10	330	413
EGM 10	11.948	1.50	15	400	600	10	265	398	10	265	398
EGM 12	14.274	1.75	15	335	586	10	225	394	10	225	394


Cold forming taps for inserts



EG M

6H mod

HSS PM/F

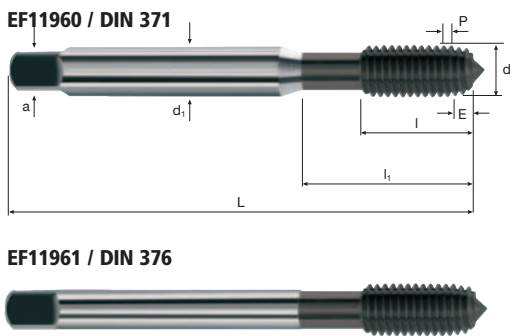

Al
Aluminium
> 99%

Al
Aluminium
Alloy

Cu
Copper


CuZn Brass

Example: Order-N°.										F-DLC
Article-N°.										EF11960
Ø Code	d	P	L	l	l ₁	d ₁	a			
.044	EGM 3	0.50	63	13	21	4.5	3.4	3	3.40	●
.058	EGM 4	0.70	70	15	25	6.0	4.9	4	4.60	●
.084	EGM 5	0.80	80	17	30	6.0	4.9	4	5.70	●
.088	EGM 6	1.00	90	20	35	8.0	6.2	4	6.80	●
.160	EGM 8	1.25	100	22	39	10.0	8.0	4	9.00	●

Example: Order-N°.										F-DLC
Article-N°.										EF11961
Ø Code	d	P	L	l	l ₁	d ₁	a			
.174	EGM10	1.50	110	25	50	9.0	7.0	5	11.20	●
.240	EGM12	1.75	110	26	58	11.0	9.0	5	13.40	●

CF

Application



Material

Steel
< 850 N/mm²
 $A_s > 10\%$



Stainless steel
ferrite/martensitic
 $A_s > 10\%$



Stainless steel
[Cr-Ni/1.4301]



EG-M	ø [mm]	P [mm]	v_c 1.5 x d [min ⁻¹]			v_c 2.0 x d [min ⁻¹]			v_c 3.0 x d [min ⁻¹]		
			n	v_f	[100%]	n	v_f	[100%]	n	v_f	[100%]
EGM 3	3.650	0.50	20	1745	873	15	1310	655	10	870	435
EGM 4	4.910	0.70	20	1295	906	15	970	679	10	650	455
EGM 5	6.040	0.80	20	1055	844	15	790	632	10	525	420
EGM 6	7.300	1.00	20	870	870	15	655	655	10	435	435
EGM 8	9.624	1.25	20	660	825	15	495	619	10	330	413
EGM 10	11.948	1.50	20	535	803	15	400	600	10	265	398
EGM 12	14.274	1.75	20	445	779	15	335	586	10	225	394
EGM 3	3.650	0.50	15	1310	655	10	870	435			
EGM 4	4.910	0.70	15	970	679	10	650	455			
EGM 5	6.040	0.80	15	790	632	10	525	420			
EGM 6	7.300	1.00	15	655	655	10	435	435			
EGM 8	9.624	1.25	15	495	619	10	330	413			
EGM 10	11.948	1.50	15	400	600	10	265	398			
EGM 12	14.274	1.75	15	335	586	10	225	394			
EGM 3	3.650	0.50	15	1310	655	10	870	435			
EGM 4	4.910	0.70	15	970	679	10	650	455			
EGM 5	6.040	0.80	15	790	632	10	525	420			
EGM 6	7.300	1.00	15	655	655	10	435	435			
EGM 8	9.624	1.25	15	495	619	10	330	413			
EGM 10	11.948	1.50	15	400	600	10	265	398			
EGM 12	14.274	1.75	15	335	586	10	225	394			
EGM 3	3.650	0.50	15	1310	655	10	870	435			
EGM 4	4.910	0.70	15	970	679	10	650	455			
EGM 5	6.040	0.80	15	790	632	10	525	420			
EGM 6	7.300	1.00	15	655	655	10	435	435			
EGM 8	9.624	1.25	15	495	619	10	330	413			
EGM 10	11.948	1.50	15	400	600	10	265	398			
EGM 12	14.274	1.75	15	335	586	10	225	394			

Cold forming taps for inserts




EG M

6H mod

HSS PM/F

Form E

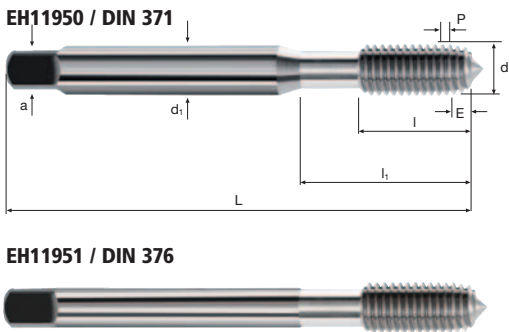

Rm < 850

Rm 850-1100

Inox Stainless

Example: Order-N°.										TiCN	
Article-N°.										EH11950	
Ø Code	d	P	L	l	l1	d1	a				
.044	EGM 3	0.50	63	13	21	4.5	3.4	3	3.40		•
.058	EGM 4	0.70	70	15	25	6.0	4.9	4	4.60		•
.084	EGM 5	0.80	80	17	30	6.0	4.9	5	5.70		•
.088	EGM 6	1.00	90	20	35	8.0	6.2	5	6.80		•
.160	EGM 8	1.25	100	22	39	10.0	8.0	5	9.00		•

Example: Order-N°.										TiCN	
Article-N°.										EH11951	
Ø Code	d	P	L	l	l1	d1	a				
.174	EGM10	1.50	110	25	40	9.0	7.0	7	11.20		•
.240	EGM12	1.75	110	28	40	11.0	9.0	7	13.40		•

CF



Thread milling cutters M / MF / G / UNC / UNF / UN / NPT / NPTF

Drill / thread milling cutters with 45° chamfer

N° E22200



M

1.5xd

Al
Aluminium
Cast

GG(G)
Cast iron

391

N° E22300



M

2xd

Al
Aluminium
Cast

GG(G)
Cast iron

393

Thread milling cutters with 45° chamfer

N° EH24200



M

1.5xd



HRC
< 56

GG(G)
Cast iron

395

N° EH24300



M

2xd



Rm
<850-1500

GG(G)
Cast iron

397

N° EH24220



MF

1.5xd



Rm
<850-1500

GG(G)
Cast iron

399

N° EH24320



MF

2xd



Rm
<850-1500

GG(G)
Cast iron

401

N° EH24340



G

2xd



Rm
<850-1500

GG(G)
Cast iron

403

N° EH24360



UNC

2xd



Rm
<850-1500

GG(G)
Cast iron

405

N° EH24370



UNF

2xd



Rm
<850-1500

GG(G)
Cast iron

407

TM



Thread milling cutters M / MF / G / UNC / UNF / UN / NPT / NPTF

Thread milling cutters

N° EU2010



M

1.5xd



Rm

<850-1500

GG(G)

Cast iron

409

N° EU2060



G

1.5xd



Rm

<850-1300

GG(G)

Cast iron

411

N° EU2110



UN

1.5xd



Rm

<850-1300

GG(G)

Cast iron

413

N° EU2200 / EU2210



NPT
NPTF



Rm

<850-1300

GG(G)

Cast iron

415

Multi-range thread milling cutters

N° EH26020



M



Rm

<850-1500

GG(G)

Cast iron

417

N° EH26040



G



Rm

<850-1500

GG(G)

Cast iron

419

Thread whirler

N° E28500



M

3xd



Rm

<850-1500

Inox
Ti
Ni

421

TM


Application	Material	M	d ₂ [mm]	v _c [m/min]	f [mm]	L _K [mm]	n [min ⁻¹]	v _f [mm/min]
	Cast iron GG(G)	M 4	3.30	100	0.050	7.4	9645	480
		M 5	4.20	100	0.065	9.4	7580	495
		M 6	5.00	100	0.075	11.7	6365	475
		M 8	6.80	100	0.100	14.7	4680	470
		M10	8.50	100	0.125	19.3	3745	470
		M12	10.20	100	0.150	22.2	3120	470
		M16	14.00	100	0.210	27.8	2275	480
	Cast aluminium	M 4	3.30	250	0.060	7.4	24115	1445
		M 5	4.20	250	0.075	9.4	18950	1420
		M 6	5.00	250	0.090	11.7	15915	1430
		M 8	6.80	250	0.120	14.7	11705	1405
		M10	8.50	250	0.150	19.3	9360	1405
		M12	10.20	250	0.180	22.2	7800	1405
		M16	14.00	250	0.250	27.8	5685	1420
	Wrought aluminium alloys Si < 6%	M 4	3.30	200	0.060	7.4	19290	1155
		M 5	4.20	200	0.075	9.4	15160	1135
		M 6	5.00	200	0.090	11.7	12735	1145
		M 8	6.80	200	0.120	14.7	9360	1125
		M10	8.50	200	0.150	19.3	7490	1125
		M12	10.20	200	0.180	22.2	6240	1125
		M16	14.00	200	0.250	27.8	4545	1135
	Recommendation: uncoated							
	Short-chipping brass CuZn	M 4	3.30	250	0.060	7.4	24115	1445
		M 5	4.20	250	0.075	9.4	18950	1420
		M 6	5.00	250	0.090	11.7	15915	1430
		M 8	6.80	250	0.120	14.7	11705	1405
		M10	8.50	250	0.150	19.3	9360	1405
		M12	10.20	250	0.180	22.2	7800	1405
		M16	14.00	250	0.250	27.8	5685	1420

Cutting data for TiCN-coated tools

Application	Material	M	D1 [mm]	P [mm]	z	v _c [m/min]	f _z [mm]	n [mm ⁻¹]	v _{fc} [mm/min]	v _f [mm/min]
	Cast iron GG(G)	M 4	3.20	0.70	2	100	0.025	9945	99	495
		M 5	4.00	0.80	2	100	0.030	7960	96	480
		M 6	4.75	1.00	2	100	0.035	6700	98	470
		M 8	6.35	1.25	2	100	0.050	5015	103	500
		M10	7.95	1.50	2	100	0.060	4005	98	480
		M12	9.95	1.75	2	100	0.075	3200	82	480
		M16	13.20	2.00	2	100	0.100	2410	84	480
	Cast aluminium	M 4	3.20	0.70	2	250	0.030	24870	298	1490
		M 5	4.00	0.80	2	250	0.035	19895	279	1395
		M 6	4.75	1.00	2	250	0.045	16755	315	1510
		M 8	6.35	1.25	2	250	0.060	12530	310	1505
		M10	7.95	1.50	2	250	0.070	10010	287	1400
		M12	9.95	1.75	2	250	0.090	8000	246	1440
		M16	13.20	2.00	2	250	0.120	6030	253	1445
	Wrought aluminium alloys Si < 6%	M 4	3.20	0.70	2	200	0.030	19895	239	1195
		M 5	4.00	0.80	2	200	0.035	15915	223	1115
		M 6	4.75	1.00	2	200	0.045	13405	251	1205
		M 8	6.35	1.25	2	200	0.060	10025	249	1205
		M10	7.95	1.50	2	200	0.070	8010	230	1120
		M12	9.95	1.75	2	200	0.090	6400	196	1150
		M16	13.20	2.00	2	200	0.120	4825	203	1160
	Recommendation: uncoated									
	Short-chipping brass CuZn	M 4	3.20	0.70	2	250	0.030	24870	298	1490
		M 5	4.00	0.80	2	250	0.035	19895	279	1395
		M 6	4.75	1.00	2	250	0.045	16755	315	1510
		M 8	6.35	1.25	2	250	0.060	12530	310	1505
		M10	7.95	1.50	2	250	0.070	10010	287	1400
		M12	9.95	1.75	2	250	0.090	8000	246	1440
		M16	13.20	2.00	2	250	0.120	6030	253	1445

Cutting data for TiCN-coated tools

1.5xd, chamfer 45°, Incool

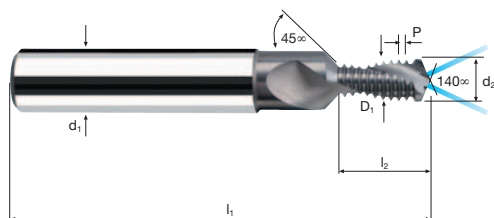

TM

Application	Material	M	d ₂ [mm]	v _c [m/min]	f [mm]	L _K [mm]	n [min ⁻¹]	v _f [mm/min]
	Cast iron GG(G)	M 4	3.30	100	0.050	9.5	9645	480
		M 5	4.20	100	0.065	11.8	7580	495
		M 6	5.00	100	0.075	14.7	6365	475
		M 8	6.80	100	0.100	19.7	4680	470
		M 10	8.50	100	0.125	23.8	3745	470
		M 12	10.20	100	0.150	27.4	3120	470
		M 16	14.00	100	0.210	37.8	2275	480
	Cast aluminium	M 4	3.30	250	0.060	9.5	24115	1445
		M 5	4.20	250	0.075	11.8	18950	1420
		M 6	5.00	250	0.090	14.7	15915	1430
		M 8	6.80	250	0.120	19.7	11705	1405
		M 10	8.50	250	0.150	23.8	9360	1405
		M 12	10.20	250	0.180	27.4	7800	1405
		M 16	14.00	250	0.250	37.8	5685	1420
	Wrought aluminium alloys Si < 6%	M 4	3.30	200	0.060	9.5	19290	1155
		M 5	4.20	200	0.075	11.8	15160	1135
		M 6	5.00	200	0.090	14.7	12735	1145
		M 8	6.80	200	0.120	19.7	9360	1125
		M 10	8.50	200	0.150	23.8	7490	1125
		M 12	10.20	200	0.180	27.4	6240	1125
		M 16	14.00	200	0.250	37.8	4545	1135
	Recommendation: uncoated							
	Short-chipping brass CuZn	M 4	3.30	250	0.060	9.5	24115	1445
		M 5	4.20	250	0.075	11.8	18950	1420
		M 6	5.00	250	0.090	14.7	15915	1430
		M 8	6.80	250	0.120	19.7	11705	1405
		M 10	8.50	250	0.150	23.8	9360	1405
		M 12	10.20	250	0.180	27.4	7800	1405
		M 16	14.00	250	0.250	37.8	5685	1420

Cutting data for TiCN-coated tools

Application	Material	M	D1 [mm]	P [mm]	z	v _c [m/min]	f _z [mm]	n [mm ⁻¹]	v _{fc} [mm/min]	v _f [mm/min]
	Cast iron GG(G)	M 4	3.20	0.70	2	100	0.020	9945	80	400
		M 5	4.00	0.80	2	100	0.025	7960	80	400
		M 6	4.75	1.00	2	100	0.030	6700	83	400
		M 8	6.35	1.25	2	100	0.040	5015	83	400
		M 10	7.95	1.50	2	100	0.055	4005	90	440
		M 12	9.95	1.75	2	100	0.065	3200	71	415
		M 16	13.20	2.00	2	100	0.090	2410	76	435
	Cast aluminium	M 4	3.20	0.70	2	250	0.025	24870	249	1245
		M 5	4.00	0.80	2	250	0.030	19895	239	1195
		M 6	4.75	1.00	2	250	0.035	16755	245	1175
		M 8	6.35	1.25	2	250	0.050	12530	259	1255
		M 10	7.95	1.50	2	250	0.060	10010	246	1200
		M 12	9.95	1.75	2	250	0.075	8000	205	1200
		M 16	13.20	2.00	2	250	0.100	6030	211	1205
	Wrought aluminium alloys Si < 6%	M 4	3.20	0.70	2	200	0.025	19895	199	995
		M 5	4.00	0.80	2	200	0.030	15915	191	955
		M 6	4.75	1.00	2	200	0.035	13405	196	940
		M 8	6.35	1.25	2	200	0.050	10025	207	1005
		M 10	7.95	1.50	2	200	0.060	8010	197	960
		M 12	9.95	1.75	2	200	0.075	6400	164	960
		M 16	13.20	2.00	2	200	0.100	4825	169	965
	Recommendation: uncoated									
	Short-chipping brass CuZn	M 4	3.20	0.70	2	250	0.025	24870	249	1245
		M 5	4.00	0.80	2	250	0.030	19895	239	1195
		M 6	4.75	1.00	2	250	0.035	16755	245	1175
		M 8	6.35	1.25	2	250	0.050	12530	259	1255
		M 10	7.95	1.50	2	250	0.060	10010	246	1200
		M 12	9.95	1.75	2	250	0.075	8000	205	1200
		M 16	13.20	2.00	2	250	0.100	6030	211	1205

Cutting data for TiCN-coated tools


Drill/thread milling cutters

2.0xd, chamfer 45°, Incool

M

HM



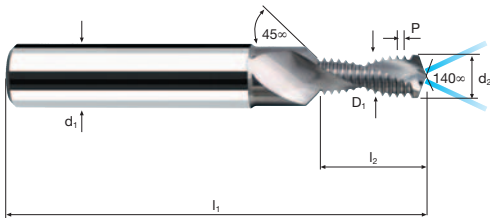

Al
Aluminium
Alloy

Al
Aluminium
Cast

Cu
Copper

Plastic
Thermoplast

GG(G)
CuZn Brass

Example: Order-N°. Article-N°. EH22300 ø-Code .058											TiCN
										E22300	EH22300
Ø Code	d	P	l1	l2	d1 h6	d2	D1	Rk 6H			
.058	M 4	0.70	48	9.0	6	3.3	3.20	1.560	2	●	●
.084	M 5	0.80	54	11.2	6	4.2	4.00	1.950	2	●	●
.088	M 6	1.00	62	13.9	8	5.0	4.75	2.315	2	●	●
.160	M 8	1.25	74	18.7	10	6.8	6.35	3.095	2	●	●
.174	M10	1.50	80	22.5	12	8.5	7.95	3.875	2	●	●
.240	M12	1.75	90	26.1	14	10.2	9.95	4.855	2	●	●
.246	M16	2.00	102	36.0	18	14.0	13.20	6.440	2	●	●

TM

Application



Material

Steel
850 - 1100 N/mm²

M	D1 [mm]	P [mm]	z	v _c [m/min]	f _z [mm]	L _K [mm]	n [mm ⁻¹]	v _f [mm/min]	v _f [mm/min]
M 3	2.30	0.50	3	80	0.0060	5.7	11070	47	200
M 4	3.00	0.70	3	80	0.0075	8.0	8490	48	190
M 5	4.00	0.80	3	80	0.0100	9.8	6365	38	190
M 6	4.80	1.00	3	80	0.0120	11.3	5305	38	190
M 8	6.40	1.25	3	80	0.0160	14.1	3980	38	190
M 10	7.95	1.50	4	80	0.0200	18.6	3205	52	255
M 12	9.95	1.75	4	80	0.0250	21.4	2560	44	255
M 16	12.80	2.00	4	80	0.0320	29.0	1990	51	255

Steel
1300 - 1500 N/mm²

M 3	2.30	0.50	3	50	0.0050	5.7	6920	25	105
M 4	3.00	0.70	3	50	0.0065	8.0	5305	26	105
M 5	4.00	0.80	3	50	0.0090	9.8	3980	21	105
M 6	4.80	1.00	3	50	0.0105	11.3	3315	21	105
M 8	6.40	1.25	3	50	0.0140	14.1	2485	21	105
M 10	7.95	1.50	4	50	0.0175	18.6	2000	29	140
M 12	9.95	1.75	4	50	0.0220	21.4	1600	24	140
M 16	12.80	2.00	4	50	0.0285	29.0	1245	28	140

Hardened tool steel
48 - 52 HRC

M 3	2.30	0.50	3	30	0.0040	5.7	4150	12	50
M 4	3.00	0.70	3	30	0.0050	8.0	3185	13	50
M 5	4.00	0.80	3	30	0.0065	9.8	2385	9	45
M 6	4.80	1.00	3	30	0.0080	11.3	1990	10	50
M 8	6.40	1.25	3	30	0.0105	14.1	1490	9	45
M 10	7.95	1.50	4	30	0.0135	18.6	1200	13	65
M 12	9.95	1.75	4	30	0.0165	21.4	960	11	65
M 16	12.80	2.00	4	30	0.0215	29.0	745	13	65

Stainless steel
[Cr-Ni/1.4301]

M 3	2.30	0.50	3	50	0.0040	5.7	6920	20	85
M 4	3.00	0.70	3	50	0.0050	8.0	5305	20	80
M 5	4.00	0.80	3	50	0.0065	9.8	3980	16	80
M 6	4.80	1.00	3	50	0.0080	11.3	3315	16	80
M 8	6.40	1.25	3	50	0.0105	14.1	2485	16	80
M 10	7.95	1.50	4	50	0.0135	18.6	2000	23	110
M 12	9.95	1.75	4	50	0.0165	21.4	1600	18	105
M 16	12.80	2.00	4	50	0.0215	29.0	1245	21	105

Material

Cast iron
GG(G)

M	D1 [mm]	P [mm]	z	v _c [m/min]	f _z [mm]	L _K [mm]	n [mm ⁻¹]	v _f [mm/min]	v _f [mm/min]
M 3	2.30	0.50	3	120	0.0060	5.7	16610	70	300
M 4	3.00	0.70	3	120	0.0075	8.0	12735	71	285
M 5	4.00	0.80	3	120	0.0100	9.8	9550	57	285
M 6	4.80	1.00	3	120	0.0120	11.3	7960	57	285
M 8	6.40	1.25	3	120	0.0160	14.1	5970	57	285
M 10	7.95	1.50	4	120	0.0200	18.6	4805	79	385
M 12	9.95	1.75	4	120	0.0250	21.4	3840	66	385
M 16	12.80	2.00	4	120	0.0320	29.0	2985	76	380

Wrought aluminium
alloys Si < 6%

M 3	2.30	0.50	3	150	0.0080	5.7	20760	117	500
M 4	3.00	0.70	3	150	0.0105	8.0	15915	125	500
M 5	4.00	0.80	3	150	0.0140	9.8	11935	100	500
M 6	4.80	1.00	3	150	0.0170	11.3	9945	101	505
M 8	6.40	1.25	3	150	0.0225	14.1	7460	101	505
M 10	7.95	1.50	4	150	0.0280	18.6	6005	138	675
M 12	9.95	1.75	4	150	0.0350	21.4	4800	114	670
M 16	12.80	2.00	4	150	0.0450	29.0	3730	134	670



Cast aluminium

M 3	2.30	0.50	3	200	0.0080	5.7	27680	155	665
M 4	3.00	0.70	3	200	0.0105	8.0	21220	168	670
M 5	4.00	0.80	3	200	0.0140	9.8	15915	134	670
M 6	4.80	1.00	3	200	0.0170	11.3	13265	135	675
M 8	6.40	1.25	3	200	0.0225	14.1	9945	134	670
M 10	7.95	1.50	4	200	0.0280	18.6	8010	183	895
M 12	9.95	1.75	4	200	0.0350	21.4	6400	153	895
M 16	12.80	2.00	4	200	0.0450	29.0	4975	179	895

Titanium alloys
> 300 HB
[Ti6Al4V]

M 3	2.30	0.50	3	40	0.0040	5.7	5535	15	65
M 4	3.00	0.70	3	40	0.0050	8.0	4245	16	65
M 5	4.00	0.80	3	40	0.0065	9.8	3185	12	60
M 6	4.80	1.00	3	40	0.0080	11.3	2655	13	65
M 8	6.40	1.25	3	40	0.0105	14.1	1990	13	65
M 10	7.95	1.50	4	40	0.0135	18.6	1600	17	85
M 12	9.95	1.75	4	40	0.0165	21.4	1280	15	85
M 16	12.80	2.00	4	40	0.0215	29.0	995	17	85

1.5xd, chamfer 45°, Incool

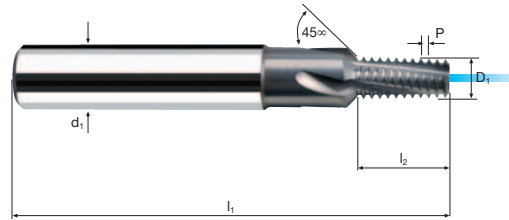

Rm ≤ 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	Aluminium GG(G)
--------------------	-----------------------	------------------------	------------------------	---------------------	--	--	--------------------------	-----------------------	----------------------------------

[illegible]

Application



Material

Steel
850 - 1100 N/mm²

M	D1 [mm]	P [mm]	z	v _c [m/min]	f _z [mm]	L _K [mm]	n [mm ⁻¹]	v _f [mm/min]	v _f [mm/min]
M 3	2.30	0.50	3	80	0.0055	7.2	11070	43	185
M 4	3.00	0.70	3	80	0.0070	9.4	8490	45	180
M 5	4.00	0.80	3	80	0.0090	11.4	6365	34	170
M 6	4.80	1.00	3	80	0.0110	14.3	5305	35	175
M 8	6.40	1.25	3	80	0.0145	19.1	3980	35	175
M 10	7.95	1.50	4	80	0.0180	23.1	3205	47	230
M 12	9.95	1.75	4	80	0.0225	26.7	2560	39	230
M 16	12.80	2.00	4	80	0.0290	37.0	1990	46	230

Steel
1300 - 1500 N/mm²

M 3	2.30	0.50	3	50	0.0045	7.2	6920	22	95
M 4	3.00	0.70	3	50	0.0060	9.4	5305	24	95
M 5	4.00	0.80	3	50	0.0080	11.4	3980	19	95
M 6	4.80	1.00	3	50	0.0095	14.3	3315	19	95
M 8	6.40	1.25	3	50	0.0125	19.1	2485	19	95
M 10	7.95	1.50	4	50	0.0160	23.1	2000	27	130
M 12	9.95	1.75	4	50	0.0200	26.7	1600	22	130
M 16	12.80	2.00	4	50	0.0255	37.0	1245	25	125

Hardened tool steel
48 - 52 HRC

M 3	2.30	0.50	3	30	0.0035	7.2	4150	11	45
M 4	3.00	0.70	3	30	0.0045	9.4	3185	11	45
M 5	4.00	0.80	3	30	0.0060	11.4	2385	9	45
M 6	4.80	1.00	3	30	0.0070	14.3	1990	8	40
M 8	6.40	1.25	3	30	0.0095	19.1	1490	8	40
M 10	7.95	1.50	4	30	0.0120	23.1	1200	12	60
M 12	9.95	1.75	4	30	0.0150	26.7	960	10	60
M 16	12.80	2.00	4	30	0.0195	37.0	745	12	60

Stainless steel
[Cr-Ni/1.4301]

M 3	2.30	0.50	3	50	0.0035	7.2	6920	18	75
M 4	3.00	0.70	3	50	0.0045	9.4	5305	18	70
M 5	4.00	0.80	3	50	0.0060	11.4	3980	14	70
M 6	4.80	1.00	3	50	0.0070	14.3	3315	14	70
M 8	6.40	1.25	3	50	0.0095	19.1	2485	14	70
M 10	7.95	1.50	4	50	0.0120	23.1	2000	19	95
M 12	9.95	1.75	4	50	0.0150	26.7	1600	16	95
M 16	12.80	2.00	4	50	0.0195	37.0	1245	19	95

Material

Cast iron
GG(G)

M	D1 [mm]	P [mm]	z	v _c [m/min]	f _z [mm]	L _K [mm]	n [mm ⁻¹]	v _f [mm/min]	v _f [mm/min]
M 3	2.30	0.50	3	120	0.0055	7.2	16610	64	275
M 4	3.00	0.70	3	120	0.0070	9.4	12735	66	265
M 5	4.00	0.80	3	120	0.0090	11.4	9550	52	260
M 6	4.80	1.00	3	120	0.0110	14.3	7960	53	265
M 8	6.40	1.25	3	120	0.0145	19.1	5970	52	260
M 10	7.95	1.50	4	120	0.0180	23.1	4805	71	345
M 12	9.95	1.75	4	120	0.0225	26.7	3840	59	345
M 16	12.80	2.00	4	120	0.0290	37.0	2985	69	345

Wrought aluminium
alloys Si < 6%

M 3	2.30	0.50	3	150	0.0070	7.2	20760	102	435
M 4	3.00	0.70	3	150	0.0095	9.4	15915	114	455
M 5	4.00	0.80	3	150	0.0125	11.4	11935	90	450
M 6	4.80	1.00	3	150	0.0155	14.3	9945	92	460
M 8	6.40	1.25	3	150	0.0205	19.1	7460	92	460
M 10	7.95	1.50	4	150	0.0250	23.1	6005	123	600
M 12	9.95	1.75	4	150	0.0315	26.7	4800	103	605
M 16	12.80	2.00	4	150	0.0405	37.0	3730	121	605



Cast aluminium

M 3	2.30	0.50	3	200	0.0070	7.2	27680	135	580
M 4	3.00	0.70	3	200	0.0095	9.4	21220	151	605
M 5	4.00	0.80	3	200	0.0125	11.4	15915	119	595
M 6	4.80	1.00	3	200	0.0155	14.3	13265	123	615
M 8	6.40	1.25	3	200	0.0205	19.1	9945	122	610
M 10	7.95	1.50	4	200	0.0250	23.1	8010	164	800
M 12	9.95	1.75	4	200	0.0315	26.7	6400	138	805
M 16	12.80	2.00	4	200	0.0405	37.0	4975	161	805

Titanium alloys
> 300 HB
[Ti6Al4V]


M 3	2.30	0.50	3	40	0.0035	7.2	5535	14	60
M 4	3.00	0.70	3	40	0.0045	9.4	4245	14	55
M 5	4.00	0.80	3	40	0.0060	11.4	3185	11	55
M 6	4.80	1.00	3	40	0.0070	14.3	2655	11	55
M 8	6.40	1.25	3	40	0.0095	19.1	1990	11	55
M 10	7.95	1.50	4	40	0.0120	23.1	1600	15	75
M 12	9.95	1.75	4	40	0.0150	26.7	1280	13	75
M 16	12.80	2.00	4	40	0.0195	37.0	995	16	80

2.0xd, chamfer 45°, Incool

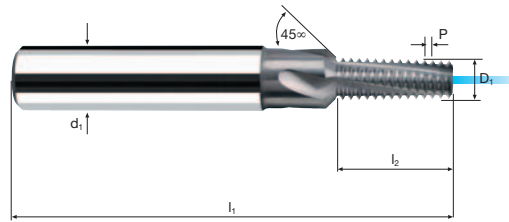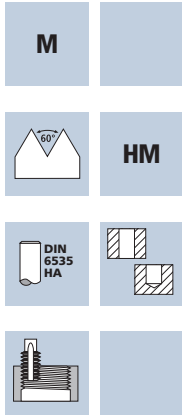

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	Aluminium GG(G)
--------------------	-----------------------	------------------------	------------------------	---------------------	--	--	--------------------------	-----------------------	----------------------------------



[illegible]



Application	Material	MF	D1 [mm]	P [mm]	z	v_c [m/min]	f_z [mm]	L_K [mm]	n [mm ⁻¹]	v_{fc} [mm/min]	v_f [mm/min]
Steel 850 - 1100 N/mm ²		M 4	3.00	0.50	3	80	0.0075	7.9	8490	48	190
		M 5	4.00	0.50	3	80	0.0100	9.4	6365	38	190
		M 6	4.80	0.50	3	80	0.0120	10.6	5305	38	190
		M 6	4.80	0.75	3	80	0.0120	10.8	5305	38	190
		M 8	6.40	0.75	3	80	0.0160	14.1	3980	38	190
		M 8	6.40	1.00	3	80	0.0160	14.5	3980	38	190
		M 10	7.95	1.00	4	80	0.0200	17.8	3205	52	255
		M 10	7.95	1.25	4	80	0.0200	18.2	3205	52	255
		M 12	9.95	1.00	4	80	0.0250	20.8	2560	44	255
		M 12	9.95	1.50	4	80	0.0250	21.6	2560	44	255
		M 14	11.20	1.50	4	80	0.0280	25.1	2275	51	255
		M 16	12.80	1.50	4	80	0.0320	28.3	1990	51	255
Steel 850 - 1100 N/mm ²											
Steel 1300 - 1500 N/mm ²		M 4	3.00	0.50	3	50	0.0065	7.9	5305	26	105
		M 5	4.00	0.50	3	50	0.0090	9.4	3980	21	105
		M 6	4.80	0.50	3	50	0.0105	10.6	3315	21	105
		M 6	4.80	0.75	3	50	0.0105	10.8	3315	21	105
		M 8	6.40	0.75	3	50	0.0140	14.1	2485	21	105
		M 8	6.40	1.00	3	50	0.0140	14.5	2485	21	105
		M 10	7.95	1.00	4	50	0.0175	17.8	2000	29	140
		M 10	7.95	1.25	4	50	0.0175	18.2	2000	29	140
		M 12	9.95	1.00	4	50	0.0220	20.8	1600	24	140
		M 12	9.95	1.50	4	50	0.0220	21.6	1600	24	140
		M 14	11.20	1.50	4	50	0.0250	25.1	1420	28	140
		M 16	12.80	1.50	4	50	0.0285	28.3	1245	28	140
Steel 1300 - 1500 N/mm ²											

Material	MF	D1 [mm]	P [mm]	z	v_c [m/min]	f_z [mm]	L_K [mm]	n [mm ⁻¹]	v_{fc} [mm/min]	v_f [mm/min]
Wrought aluminium alloys Si < 6%	M 4	3.00	0.50	3	150	0.0105	7.9	15915	125	500
	M 5	4.00	0.50	3	150	0.0140	9.4	11935	100	500
	M 6	4.80	0.50	3	150	0.0170	10.6	9945	101	505
	M 6	4.80	0.75	3	150	0.0170	10.8	9945	101	505
	M 8	6.40	0.75	3	150	0.0225	14.1	7460	101	505
	M 8	6.40	1.00	3	150	0.0225	14.5	7460	101	505
	M 10	7.95	1.00	4	150	0.0280	17.8	6005	138	675
	M 10	7.95	1.25	4	150	0.0280	18.2	6005	138	675
	M 12	9.95	1.00	4	150	0.0350	20.8	4800	114	670
	M 12	9.95	1.50	4	150	0.0350	21.6	4800	114	670
	M 14	11.20	1.50	4	150	0.0395	25.1	4265	135	675
	M 16	12.80	1.50	4	150	0.0450	28.3	3730	134	670
Wrought aluminium alloys Si < 6%										
Cast iron GG(G)	M 4	3.00	0.50	3	120	0.0075	7.9	12735	71	285
	M 5	4.00	0.50	3	120	0.0100	9.4	9550	57	285
	M 6	4.80	0.50	3	120	0.0120	10.6	7960	57	285
	M 6	4.80	0.75	3	120	0.0120	10.8	7960	57	285
	M 8	6.40	0.75	3	120	0.0160	14.1	5970	57	285
	M 8	6.40	1.00	3	120	0.0160	14.5	5970	57	285
	M 10	7.95	1.00	4	120	0.0200	17.8	4805	79	385
	M 10	7.95	1.25	4	120	0.0200	18.2	4805	79	385
	M 12	9.95	1.00	4	120	0.0250	20.8	3840	66	385
	M 12	9.95	1.50	4	120	0.0250	21.6	3840	66	385
	M 14	11.20	1.50	4	120	0.0280	25.1	3410	76	380
	M 16	12.80	1.50	4	120	0.0320	28.3	2985	76	380
Cast iron GG(G)										

1.5xd, chamfer 45°, Incool

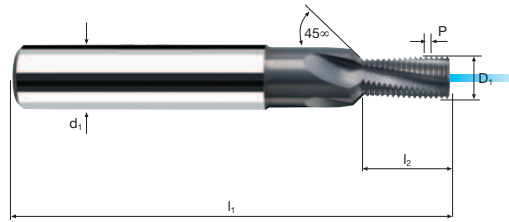

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	Aluminium GG(G)
-------------	----------------	-----------------	-----------------	--------------	--	--	-------------------	----------------	--------------------

[illegible]

Application



Material

Steel
850 - 1100 N/mm²

Steel
850 - 1100 N/mm²

Steel
1300 - 1500 N/mm²

Steel
1300 - 1500 N/mm²

MF	D1 [mm]	P [mm]	z	v _c [m/min]	f _z [mm]	L _K [mm]	n [mm ⁻¹]	v _{fc} [mm/min]	v _f [mm/min]
M 4	3.00	0.50	3	80	0.0070	9.4	8490	45	180
M 5	4.00	0.50	3	80	0.0090	11.4	6365	34	170
M 6	4.80	0.50	3	80	0.0110	13.6	5305	35	175
M 6	4.80	0.75	3	80	0.0110	13.9	5305	35	175
M 8	6.40	0.75	3	80	0.0145	17.9	3980	35	175
M 8	6.40	1.00	3	80	0.0145	18.5	3980	35	175
M 10	7.95	1.00	4	80	0.0180	22.8	3205	47	230
M 10	7.95	1.25	4	80	0.0180	23.2	3205	47	230
M 12	9.95	1.00	4	80	0.0225	26.8	2560	39	230
M 12	9.95	1.50	4	80	0.0225	27.6	2560	39	230
M 14	11.20	1.50	4	80	0.0250	32.6	2275	46	230
M 16	12.80	1.50	4	80	0.0290	35.8	1990	46	230
M 4	3.00	0.50	3	50	0.0060	9.4	5305	24	95
M 5	4.00	0.50	3	50	0.0080	11.4	3980	19	95
M 6	4.80	0.50	3	50	0.0095	13.6	3315	19	95
M 6	4.80	0.75	3	50	0.0095	13.9	3315	19	95
M 8	6.40	0.75	3	50	0.0125	17.9	2485	19	95
M 8	6.40	1.00	3	50	0.0125	18.5	2485	19	95
M 10	7.95	1.00	4	50	0.0160	22.8	2000	27	130
M 10	7.95	1.25	4	50	0.0160	23.2	2000	27	130
M 12	9.95	1.00	4	50	0.0200	26.8	1600	22	130
M 12	9.95	1.50	4	50	0.0200	27.6	1600	22	130
M 14	11.20	1.50	4	50	0.0225	32.6	1420	26	130
M 16	12.80	1.50	4	50	0.0255	35.8	1245	25	125

Material

Wrought aluminium
alloys Si < 6%

Wrought aluminium
alloys Si < 6%

Cast iron
GG(G)

Cast iron
GG(G)

MF	D1 [mm]	P [mm]	z	v _c [m/min]	f _z [mm]	L _K [mm]	n [mm ⁻¹]	v _{fc} [mm/min]	v _f [mm/min]
M 4	3.00	0.50	3	150	0.0095	9.4	15915	114	455
M 5	4.00	0.50	3	150	0.0125	11.4	11935	90	450
M 6	4.80	0.50	3	150	0.0155	13.6	9945	92	460
M 6	4.80	0.75	3	150	0.0155	13.9	9945	92	460
M 8	6.40	0.75	3	150	0.0205	17.9	7460	92	460
M 8	6.40	1.00	3	150	0.0205	18.5	7460	92	460
M 10	7.95	1.00	4	150	0.0250	22.8	6005	123	600
M 10	7.95	1.25	4	150	0.0250	23.2	6005	123	600
M 12	9.95	1.00	4	150	0.0315	26.8	4800	103	605
M 12	9.95	1.50	4	150	0.0315	27.6	4800	103	605
M 14	11.20	1.50	4	150	0.0355	32.6	4265	121	605
M 16	12.80	1.50	4	150	0.0405	35.8	3730	121	605
M 4	3.00	0.50	3	120	0.0070	9.4	12735	66	265
M 5	4.00	0.50	3	120	0.0090	11.4	9550	52	260
M 6	4.80	0.50	3	120	0.0110	13.6	7960	53	265
M 6	4.80	0.75	3	120	0.0110	13.9	7960	53	265
M 8	6.40	0.75	3	120	0.0145	17.9	5970	52	260
M 8	6.40	1.00	3	120	0.0145	18.5	5970	52	260
M 10	7.95	1.00	4	120	0.0180	22.8	4805	71	345
M 10	7.95	1.25	4	120	0.0180	23.2	4805	71	345
M 12	9.95	1.00	4	120	0.0225	26.8	3840	59	345
M 12	9.95	1.50	4	120	0.0225	27.6	3840	59	345
M 14	11.20	1.50	4	120	0.0250	32.6	3410	68	340
M 16	12.80	1.50	4	120	0.0290	35.8	2985	69	345

Thread milling cutters

2.0xd, chamfer 45°, Incool

MF




HM







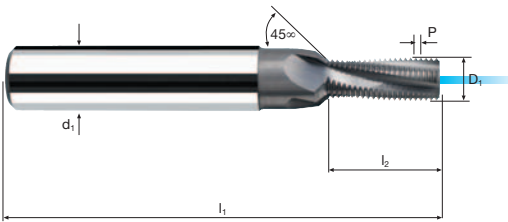

Rm< 850

Rm850-1100

Rm1100-1300

Rm1300-1500

InoxStainless

TiTitanium


AluminiumGG(G)

Example: Order-N°.									TiCN	
Article-N°.									EH24320	
ø-Code										
ø Code	d	P	l1	l2	d1 h6	D1	Rk 6H			
.046	M 4	0.50	48	8.8	6	3.00	1.475	3		●
.048	M 5	0.50	54	10.8	6	4.00	1.975	3		●
.050	M 6	0.50	62	12.8	8	4.80	2.375	3		●
.064	M 6	0.75	62	13.1	8	4.80	2.363	3		●
.066	M 8	0.75	74	16.9	10	6.40	3.163	3		●
.090	M 8	1.00	74	17.5	10	6.40	3.150	3		●
.092	M10	1.00	80	21.5	12	7.95	3.925	4		●
.162	M10	1.25	80	21.9	12	7.95	3.913	4		●
.094	M12	1.00	90	25.5	14	9.95	4.925	4		●
.176	M12	1.50	90	26.3	14	9.95	4.900	4		●
.178	M14	1.50	102	30.8	16	11.20	5.525	4		●
.180	M16	1.50	102	33.8	18	12.80	6.325	4		●


TM

Application	Material	G	D1 [mm]	P (TPI)	z	v _c [m/min]	f _z [mm]	L _K [mm]	n [mm ⁻¹]	v _{f_c} [mm/min]	v _f [mm/min]
	Steel 850 - 1100 N/mm ²	G 1/8	7.95	28	4	80	0.0180	22.4	3205	42	230
		G 1/4	10.50	19	4	80	0.0240	30.4	2425	47	235
		G 3/8	13.60	19	4	80	0.0310	37.3	1870	42	230
	Steel 1300 - 1500 N/mm ²	G 1/8	7.95	28	4	50	0.0160	22.4	2000	24	130
		G 1/4	10.50	19	4	50	0.0210	30.4	1515	25	125
		G 3/8	13.60	19	4	50	0.0275	37.3	1170	24	130
	Hardened tool steel 48 - 52 HRC	G 1/8	7.95	28	4	30	0.0120	22.4	1200	11	60
		G 1/4	10.50	19	4	30	0.0160	30.4	910	12	60
		G 3/8	13.60	19	4	30	0.0205	37.3	700	10	55
	Stainless steel [Cr-Ni/1.4301]	G 1/8	7.95	28	4	50	0.0120	22.4	2000	17	95
		G 1/4	10.50	19	4	50	0.0160	30.4	1515	19	95
		G 3/8	13.60	19	4	50	0.0205	37.3	1170	17	95
Material		G	D1 [mm]	P (TPI)	z	v _c [m/min]	f _z [mm]	L _K [mm]	n [mm ⁻¹]	v _{f_c} [mm/min]	v _f [mm/min]
Cast iron GG(G)		G 1/8	7.95	28	4	120	0.0180	22.4	4805	63	345
		G 1/4	10.50	19	4	120	0.0240	30.4	3640	71	350
		G 3/8	13.60	19	4	120	0.0310	37.3	2810	64	350
Wrought aluminium alloys Si < 6%		G 1/8	7.95	28	4	150	0.0250	22.4	6005	110	600
		G 1/4	10.50	19	4	150	0.0335	30.4	4545	123	610
		G 3/8	13.60	19	4	150	0.0430	37.3	3510	111	605
Cast aluminium		G 1/8	7.95	28	4	200	0.0250	22.4	8010	146	800
		G 1/4	10.50	19	4	200	0.0335	30.4	6065	165	815
		G 3/8	13.60	19	4	200	0.0430	37.3	4680	148	805
Titanium alloys > 300 HB [Ti6Al4V]		G 1/8	7.95	28	4	40	0.0120	22.4	1600	14	75
		G 1/4	10.50	19	4	40	0.0160	30.4	1215	16	80
		G 3/8	13.60	19	4	40	0.0205	37.3	935	14	75

2.0xd, chamfer 45°, Incool

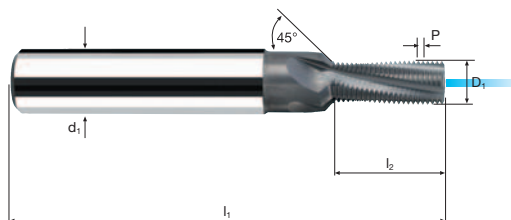[illegible]

2.0xd, chamfer 45°, Incool

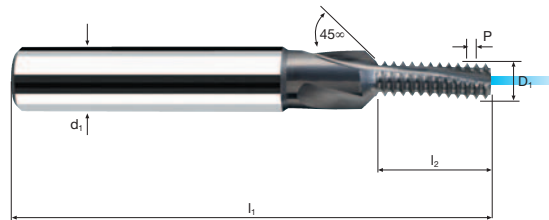[illegible]

Application



Material

Steel
850 - 1100 N/mm²

Steel
1300 - 1500 N/mm²

Hardened tool steel
48 - 52 HRC

Stainless steel
[Cr-Ni/1.4301]

UNF	D1 [mm]	P (TPI)	z	v _c [m/min]	f _z [mm]	L _K [mm]	n [mm ⁻¹]	v _{fc} [mm/min]	v _f [mm/min]
1/4	4.80	28	3	80	0.0110	15.0	5305	43	175
5/16	5.95	24	3	80	0.0135	18.7	4280	44	175
3/8	7.95	24	4	80	0.0180	21.6	3205	38	230
7/16	7.95	20	4	80	0.0180	26.7	3205	65	230
1/2	9.95	20	4	80	0.0225	29.0	2560	50	230
1/4	4.80	28	3	50	0.0095	15.0	3315	23	95
5/16	5.95	24	3	50	0.0120	18.7	2675	24	95
3/8	7.95	24	4	50	0.0160	21.6	2000	21	130
7/16	7.95	20	4	50	0.0160	26.7	2000	37	130
1/2	9.95	20	4	50	0.0200	29.0	1600	28	130
1/4	4.80	28	3	30	0.0075	15.0	1990	11	45
5/16	5.95	24	3	30	0.0090	18.7	1605	11	45
3/8	7.95	24	4	30	0.0120	21.6	1200	10	60
7/16	7.95	20	4	30	0.0120	26.7	1200	17	60
1/2	9.95	20	4	30	0.0150	29.0	960	13	60
1/4	4.80	28	3	50	0.0075	15.0	3315	18	75
5/16	5.95	24	3	50	0.0090	18.7	2675	18	70
3/8	7.95	24	4	50	0.0120	21.6	2000	16	95
7/16	7.95	20	4	50	0.0120	26.7	2000	27	95
1/2	9.95	20	4	50	0.0150	29.0	1600	21	95

Material

Cast iron
GG(G)


Wrought aluminium
alloys Si < 6%

Cast aluminium

Titanium alloys
> 300 HB
[Ti6Al4V]

UNF	D1 [mm]	P (TPI)	z	v _c [m/min]	f _z [mm]	L _K [mm]	n [mm ⁻¹]	v _{fc} [mm/min]	v _f [mm/min]
1/4	4.80	28	3	120	0.0110	15.0	7960	65	265
5/16	5.95	24	3	120	0.0135	18.7	6420	65	260
3/8	7.95	24	4	120	0.0180	21.6	4805	57	345
7/16	7.95	20	4	120	0.0180	26.7	4805	98	345
1/2	9.95	20	4	120	0.0225	29.0	3840	75	345
1/4	4.80	28	3	150	0.0150	15.0	9945	110	450
5/16	5.95	24	3	150	0.0190	18.7	8025	114	455
3/8	7.95	24	4	150	0.0250	21.6	6005	99	600
7/16	7.95	20	4	150	0.0250	26.7	6005	171	600
1/2	9.95	20	4	150	0.0315	29.0	4800	131	605
1/4	4.80	28	3	200	0.0150	15.0	13265	145	595
5/16	5.95	24	3	200	0.0190	18.7	10700	153	610
3/8	7.95	24	4	200	0.0250	21.6	8010	132	800
7/16	7.95	20	4	200	0.0250	26.7	8010	228	800
1/2	9.95	20	4	200	0.0315	29.0	6400	174	805
1/4	4.80	28	3	40	0.0075	15.0	2655	15	60
5/16	5.95	24	3	40	0.0090	18.7	2140	15	60
3/8	7.95	24	4	40	0.0120	21.6	1600	12	75
7/16	7.95	20	4	40	0.0120	26.7	1600	21	75
1/2	9.95	20	4	40	0.0150	29.0	1280	16	75



2.0xd, chamfer 45°, Incool

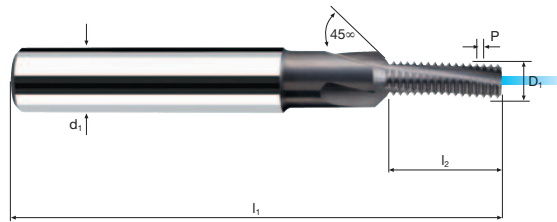[illegible]

Application	Material	M	D1 [mm]	P [mm]	z	v _c [m/min]	f _z [mm]	n [mm ⁻¹]	v _{fc} [mm/min]	v _f [mm/min]
	Steel 850 - 1100 N/mm ²	M 1.6	1.00	0.35	3	30	0.0015	9550	17	45
		M 2	1.30	0.40	3	30	0.0020	7345	16	45
		M 2.5	1.50	0.45	3	30	0.0025	6365	20	50
		M 3	2.10	0.50	3	30	0.0035	4545	15	50
		M 4	2.60	0.70	3	30	0.0065	3675	25	70
		M 5	3.60	0.80	3	30	0.0090	2655	20	70
		M 6	4.00	1.00	3	30	0.0100	2385	23	70
		M 8	5.00	1.25	3	30	0.0125	1910	26	70
		M 10	5.90	1.50	5	30	0.0150	1620	49	120
		M 12	7.90	1.75	5	30	0.0200	1210	41	120
	Steel 850 - 1100 N/mm ²	M 16	9.90	2.00	5	30	0.0250	965	46	120
	Steel 1100 - 1300 N/mm ²	M 1.6	1.00	0.35	3	20	0.0015	6365	11	30
		M 2	1.30	0.40	3	20	0.0020	4895	11	30
		M 2.5	1.50	0.45	3	20	0.0025	4245	12	30
		M 3	2.10	0.50	3	20	0.0035	3030	9	30
		M 4	2.60	0.70	3	20	0.0065	2450	18	50
		M 5	3.60	0.80	3	20	0.0090	1770	14	50
		M 6	4.00	1.00	3	20	0.0100	1590	17	50
		M 8	5.00	1.25	3	20	0.0125	1275	19	50
		M 10	5.90	1.50	5	20	0.0150	1080	33	80
		M 12	7.90	1.75	5	20	0.0200	805	27	80
	Steel 1100 - 1300 N/mm ²	M 16	9.90	2.00	5	20	0.0250	645	31	80

Material	M	D1 [mm]	P [mm]	z	v _c [m/min]	f _z [mm]	n [mm ⁻¹]	v _{fc} [mm/min]	v _f [mm/min]
Wrought aluminium alloys Si < 6%	M 1.6	1.00	0.35	3	60	0.0015	19100	32	85
	M 2	1.30	0.40	3	60	0.0020	14690	32	90
	M 2.5	1.50	0.45	3	60	0.0025	12735	38	95
	M 3	2.10	0.50	3	60	0.0035	9095	29	95
	M 4	2.60	0.70	3	60	0.0065	7345	51	145
	M 5	3.60	0.80	3	60	0.0090	5305	41	145
	M 6	4.00	1.00	3	60	0.0100	4775	48	145
	M 8	5.00	1.25	3	60	0.0125	3820	54	145
	M 10	5.90	1.50	5	60	0.0150	3235	100	245
	M 12	7.90	1.75	5	60	0.0200	2420	82	240
	M 16	9.90	2.00	5	60	0.0250	1930	92	240
Cast iron GG(G)	M 1.6	1.00	0.35	3	50	0.0015	15915	26	70
	M 2	1.30	0.40	3	50	0.0020	12245	26	75
	M 2.5	1.50	0.45	3	50	0.0025	10610	32	80
	M 3	2.10	0.50	3	50	0.0035	7580	24	80
	M 4	2.60	0.70	3	50	0.0065	6120	42	120
	M 5	3.60	0.80	3	50	0.0090	4420	34	120
	M 6	4.00	1.00	3	50	0.0100	3980	40	120
	M 8	5.00	1.25	3	50	0.0125	3185	45	120
	M 10	5.90	1.50	5	50	0.0150	2700	84	205
	M 12	7.90	1.75	5	50	0.0200	2015	68	200
	M 16	9.90	2.00	5	50	0.0250	1610	76	200


1.5xd

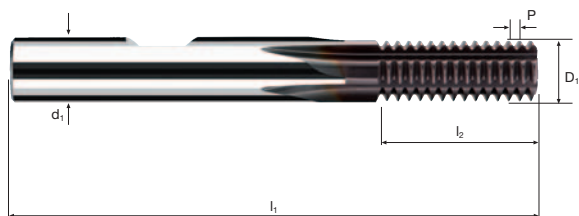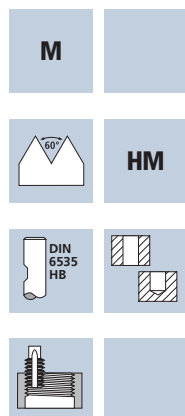


Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500				Inox Stainless	Ti Titanium	Aluminium GG(G)
--------------------	-----------------------	------------------------	------------------------	--	--	--	--------------------------	-----------------------	---------------------------

[illegible]

TM

Application	Material	G	D1 [mm]	P (TPI)	z	v _c [m/min]	f _z [mm]	n [min ⁻¹]	v _{fc} dD1 3/2	v _{fc} dD1 2/1	v _{fc} dD1 3/1	v _{fc} dD1 4/1	v _{fc} dD1 > 5/1	v _f [mm/min]
	Steel < 850 N/mm ²	G1/16-G1/8	5.90	28	5	30	0.0150	1620	40	60	80	90	96	120
		G1/4 -G3/8	7.90	19	5	30	0.0200	1210	40	60	80	90	96	120
		G1/2 -G7/8	11.90	14	5	30	0.0300	800	40	60	80	90	96	120
		G1 -G3	15.90	11	5	30	0.0400	600	40	60	80	90	96	120
	Steel 850 - 1100 N/mm ²	G1/16-G1/8	5.90	28	5	20	0.0150	1080	27	40	53	60	64	80
		G1/4 -G3/8	7.90	19	5	20	0.0200	805	27	40	53	60	64	80
		G1/2 -G7/8	11.90	14	5	20	0.0300	535	27	40	53	60	64	80
		G1 -G3	15.90	11	5	20	0.0400	400	27	40	53	60	64	80
	Stainless steel [Cr-Ni/1.4301]	G1/16-G1/8	5.90	28	5	25	0.0100	1350	23	35	47	53	56	70
		G1/4 -G3/8	7.90	19	5	25	0.0130	1005	22	33	43	49	52	65
		G1/2 -G7/8	11.90	14	5	25	0.0200	670	22	33	43	49	52	65
		G1 -G3	15.90	11	5	25	0.0265	500	22	33	43	49	52	65
	Cast iron GG(G)	G1/16-G1/8	5.90	28	5	50	0.0150	2700	68	103	137	154	164	205
		G1/4 -G3/8	7.90	19	5	50	0.0200	2015	67	100	133	150	160	200
		G1/2 -G7/8	11.90	14	5	50	0.0300	1335	67	100	133	150	160	200
		G1 -G3	15.90	11	5	50	0.0400	1000	67	100	133	150	160	200
Material		G	D1 [mm]	P (TPI)	z	v _c [m/min]	f _z [mm]	n [min ⁻¹]	v _{fc} dD1 3/2	v _{fc} dD1 2/1	v _{fc} dD1 3/1	v _{fc} dD1 4/1	v _{fc} dD1 > 5/1	v _f [mm/min]
Wrought aluminium alloys Si < 6%		G1/16-G1/8	5.90	28	5	60	0.0150	3235	82	123	163	184	196	245
		G1/4 -G3/8	7.90	19	5	60	0.0200	2420	80	120	160	180	192	240
		G1/2 -G7/8	11.90	14	5	60	0.0300	1605	80	120	160	180	192	240
		G1 -G3	15.90	11	5	60	0.0400	1200	80	120	160	180	192	240
Cast aluminium		G1/16-G1/8	5.90	28	5	80	0.0150	4315	108	163	217	244	260	325
		G1/4 -G3/8	7.90	19	5	80	0.0200	3225	108	163	217	244	260	325
		G1/2 -G7/8	11.90	14	5	80	0.0300	2140	107	160	213	240	256	320
		G1 -G3	15.90	11	5	80	0.0400	1600	107	160	213	240	256	320
Unalloyed copper		G1/16-G1/8	5.90	28	5	70	0.0150	3775	95	143	190	214	228	285
		G1/4 -G3/8	7.90	19	5	70	0.0200	2820	93	140	187	210	224	280
		G1/2 -G7/8	11.90	14	5	70	0.0300	1870	93	140	187	210	224	280
		G1 -G3	15.90	11	5	70	0.0400	1400	93	140	187	210	224	280
Thermoplastics		G1/16-G1/8	5.90	28	5	100	0.0150	5395	135	203	270	304	324	405
		G1/4 -G3/8	7.90	19	5	100	0.0200	4030	135	203	270	304	324	405
		G1/2 -G7/8	11.90	14	5	100	0.0300	2675	133	200	267	300	320	400
		G1 -G3	15.90	11	5	100	0.0400	2000	133	200	267	300	320	400

1.5xd

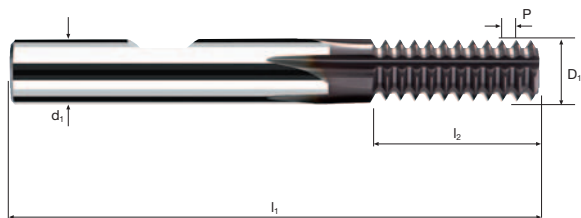

Rm < 850	Rm 850-1100	Rm 1100-1300					Inox Stainless	Ti Titanium	Aluminium GG(G)
--------------------	-----------------------	------------------------	--	--	--	--	--------------------------	-----------------------	----------------------------------

[illegible]

Application



Material

Steel
< 850 N/mm²

Steel
< 850 N/mm²

Steel
850 - 1100 N/mm²

Steel
850 - 1100 N/mm²

UNC	UNF	D1 [mm]	P (TPI)	z	v _c [m/min]	f _z [mm]	n [min ⁻¹]	v _{fc} dD1 3/2	v _{fc} dD1 2/1	v _{fc} dD1 3/1	v _{fc} dD1 4/1	v _{fc} dD1 > 5/1	v _f [mm/min]
2	3	1.50	56	3	30	0.0025	6365	17	25	33	38	40	50
3	4	1.50	48	3	30	0.0025	6365	17	25	33	38	40	50
4-5	6	2.10	40	3	30	0.0035	4545	17	25	33	38	40	50
8	10	3.00	32	3	30	0.0050	3185	17	25	33	38	40	50
12	5/16-3/8	4.00	24	3	30	0.0065	2385	15	23	30	34	36	45
1/4	7/16-1/2	4.00	20	3	30	0.0065	2385	15	23	30	34	36	45
5/16	9/16-5/8	5.00	18	3	30	0.0085	1910	17	25	33	38	40	50
3/8	3/4	5.90	16	5	30	0.0100	1620	27	40	53	60	64	80
7/16	7/8	7.90	14	5	30	0.0130	1210	27	40	53	60	64	80

1/2		7.90	13	5	30	0.0130	1210	27	40	53	60	64	80
9/16	1- 1 1/2	9.90	12	5	30	0.0165	965	27	40	53	60	64	80
5/8		9.90	11	5	30	0.0165	965	27	40	53	60	64	80

2	3	1.50	56	3	20	0.0025	4245	10	15	20	23	24	30
3	4	1.50	48	3	20	0.0025	4245	10	15	20	23	24	30
4-5	6	2.10	40	3	20	0.0035	3030	10	15	20	23	24	30
8	10	3.00	32	3	20	0.0050	2120	10	15	20	23	24	30
12	5/16-3/8	4.00	24	3	20	0.0065	1590	10	15	20	23	24	30
1/4	7/16-1/2	4.00	20	3	20	0.0065	1590	10	15	20	23	24	30
5/16	9/16-5/8	5.00	18	3	20	0.0085	1275	12	18	23	26	28	35
3/8	3/4	5.90	16	5	20	0.0100	1080	18	28	37	41	44	55
7/16	7/8	7.90	14	5	20	0.0130	805	17	25	33	38	40	50

1/2		7.90	13	5	20	0.0130	805	17	25	33	38	40	50
9/16	1- 1 1/2	9.90	12	5	20	0.0165	645	18	28	37	41	44	55
5/8		9.90	11	5	20	0.0165	645	18	28	37	41	44	55

Material

Wrought aluminium
alloys Si < 6%

Wrought aluminium
alloys Si < 6%

Cast iron
GG(G)

Cast iron
GG(G)



UNC	UNF	D1 [mm]	P (TPI)	z	v _c [m/min]	f _z [mm]	n [min ⁻¹]	v _{fc} dD1 3/2	v _{fc} dD1 2/1	v _{fc} dD1 3/1	v _{fc} dD1 4/1	v _{fc} dD1 > 5/1	v _f [mm/min]
2	3	1.50	56	3	50	0.0025	10610	27	40	53	60	64	80
3	4	1.50	48	3	50	0.0025	10610	27	40	53	60	64	80
4-5	6	2.10	40	3	50	0.0035	7580	27	40	53	60	64	80
8	10	3.00	32	3	50	0.0050	5305	27	40	53	60	64	80
12	5/16-3/8	4.00	24	3	50	0.0065	3980	27	40	53	60	64	80
1/4	7/16-1/2	4.00	20	3	50	0.0065	3980	27	40	53	60	64	80
5/16	9/16-5/8	5.00	18	3	50	0.0085	3185	27	40	53	60	64	80
3/8	3/4	5.90	16	5	50	0.0100	2700	45	68	90	101	108	135
7/16	7/8	7.90	14	5	50	0.0130	2015	43	65	87	98	104	130

1/2		7.90	13	5	50	0.0130	2015	43	65	87	98	104	130
9/16	1- 1 1/2	9.90	12	5	50	0.0165	1610	45	68	90	101	108	135
5/8		9.90	11	5	50	0.0165	1610	45	68	90	101	108	135

2	3	1.50	56	3	40	0.0025	8490	22	33	43	49	52	65
3	4	1.50	48	3	40	0.0025	8490	22	33	43	49	52	65
4-5	6	2.10	40	3	40	0.0035	6065	22	33	43	49	52	65
8	10	3.00	32	3	40	0.0050	4245	22	33	43	49	52	65
12	5/16-3/8	4.00	24	3	40	0.0065	3185	20	30	40	45	48	60
1/4	7/16-1/2	4.00	20	3	40	0.0065	3185	20	30	40	45	48	60
5/16	9/16-5/8	5.00	18	3	40	0.0085	2545	22	33	43	49	52	65
3/8	3/4	5.90	16	5	40	0.0100	2160	37	55	73	83	88	110
7/16	7/8	7.90	14	5	40	0.0130	1610	35	53	70	79	84	105

1/2		7.90	12	5	40	0.0130	1610	35	53	70	79	84	105
9/16	1- 1 1/2	9.90	12	5	40	0.0165	1285	35	53	70	79	84	105
5/8		9.90	11	5	40	0.0165	1285	35	53	70	79	84	105

1.5xd

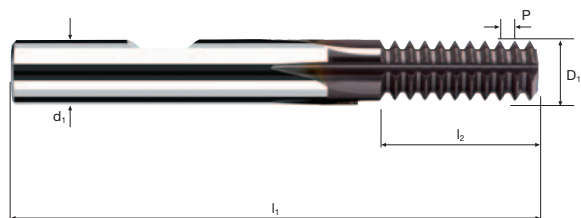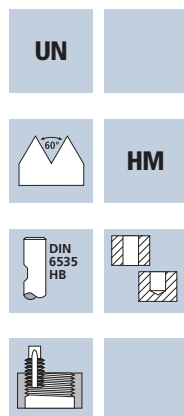

Rm < 850	Rm 850-1100	Rm 1100-1300					Inox Stainless	Ti Titanium	Aluminium GG(G)
--------------------	-----------------------	------------------------	--	--	--	--	--------------------------	-----------------------	---------------------------

Example: Order-N°. Article-N°. EU2110 ø-Code .750									UNICUT-4X
									EU2110
Ø Code	UNC	UNF	P(TPI)	l ₁	l ₂	d ₁ h ₆	D ₁		
.750*		Nr. 2	64	38	3.1	3	1.5	3	●
.751*	Nr. 2	Nr. 3	56	38	3.1	3	1.5	3	●
.752*	Nr. 3	Nr. 4	48	38	3.7	3	1.5	3	●
.753*		Nr. 5	44	38	4.6	3	2.1	3	●
.754*	Nr. 4 - 5	Nr. 6	40	38	4.4	3	2.1	3	●
.755*		Nr. 8	36	42	6.3	4	3.0	3	●
.756*	Nr. 8	Nr. 10	32	42	6.3	4	3.0	3	●
.759*		Nr. 12 - 1/4	28	42	8.1	4	3.6	3	●
.761	Nr. 12	5/16 - 3/8	24	57	8.4	6	4.0	3	●
.762	1/4	7/16 - 1/2	20	57	10.1	6	4.0	3	●
.764	5/16	9/16 - 5/8	18	57	12.7	6	5.0	3	●
.766	3/8	3/4	16	57	14.2	6	5.9	5	●
.769	7/16	7/8	14	63	16.3	8	7.9	5	●
.770	1/2		13	63	19.5	8	7.9	5	●
.771	9/16	1" - 1 1/2	12	72	23.2	10	9.9	5	●
.773	5/8		11	72	23.0	10	9.9	5	●
* without clamping flat only									

TM

Thread milling cutters

NPT
NPTF


1 : 16



DIN 6535 HB



HM





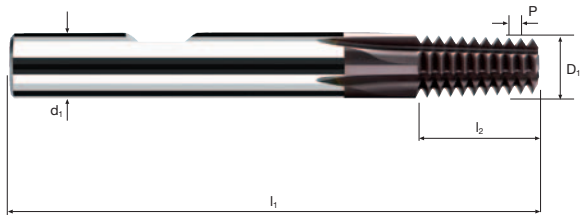

Rm < 850	Rm 850-1100	Rm 1100-1300					Inox Stainless	Ti Titanium	Aluminium GG(G)
-------------	----------------	-----------------	--	--	--	--	-------------------	----------------	--------------------

Example: Order-N°.									UNICUT-4X	
Article-N°.									EU2200	
ø-Code										
Ø Code	d	P(TPI)	l1	l2	d1 h6	D1				
.840	NPT	1/16 - 1/8	27	57	9.4	6	5.9	5		
.842	NPT	1/4 - 3/8	18	63	14.1	8	7.9	5		
.844	NPT	1/2 - 3/4	14	83	19.9	12	11.9	5		
.846	NPT	1" - 2"	11.5	92	26.5	16	15.9	6		

Example: Order-N°.									UNICUT-4X	
Article-N°.									EU2210	
ø-Code										
Ø Code	d	P(TPI)	l1	l2	d1 h6	D1				
.840	NPTF	1/16 - 1/8	27	57	9.4	6	5.9	5		
.842	NPTF	1/4 - 3/8	18	63	14.1	8	7.9	5		
.844	NPTF	1/2 - 3/4	14	83	19.9	12	11.9	5		
.846	NPTF	1" - 2"	11.5	92	26.5	16	15.9	6		

TM

Application



Material

Steel
850 - 1100 N/mm²

Steel
1300 - 1500 N/mm²

Hardened tool steel
48 - 52 HRC

Stainless steel
[Cr-Ni/1.4301]

M	D1 [mm]	P [mm]	z	v _c [m/min]	f _z [mm]	n [min ⁻¹]	v _{fc} dD1 3/2	v _{fc} dD1 2/1	v _{fc} dD1 3/1	v _{fc} dD1 4/1	v _{fc} dD1 > 5/1	v _f [mm/min]
≥ M14	9.95	1.00	4	80	0.0250	2560	85	128	170	191	204	255
≥ M14	9.95	1.25	4	80	0.0250	2560	85	128	170	191	204	255
≥ M14	9.95	1.50	4	80	0.0250	2560	85	128	170	191	204	255
≥ M18	11.95	1.00	4	80	0.0300	2130	85	128	170	191	204	255
≥ M18	11.95	1.50	4	80	0.0300	2130	85	128	170	191	204	255
≥ M24	15.95	1.00	5	80	0.0400	1595	107	160	213	240	256	320
≥ M24	15.95	2.00	5	80	0.0400	1595	107	160	213	240	256	320
≥ M30	19.95	1.50	5	80	0.0500	1275	107	160	213	240	256	320
≥ M30	19.95	2.00	5	80	0.0500	1275	107	160	213	240	256	320
≥ M14	9.95	1.00	4	50	0.0200	1600	43	65	87	98	104	130
≥ M14	9.95	1.25	4	50	0.0200	1600	43	65	87	98	104	130
≥ M14	9.95	1.50	4	50	0.0200	1600	43	65	87	98	104	130
≥ M18	11.95	1.00	4	50	0.0240	1330	43	65	87	98	104	130
≥ M18	11.95	1.50	4	50	0.0240	1330	43	65	87	98	104	130
≥ M24	15.95	1.00	5	50	0.0320	1000	53	80	107	120	128	160
≥ M24	15.95	2.00	5	50	0.0320	1000	53	80	107	120	128	160
≥ M30	19.95	1.50	5	50	0.0400	800	53	80	107	120	128	160
≥ M30	19.95	2.00	5	50	0.0400	800	53	80	107	120	128	160
≥ M14	9.95	1.00	4	30	0.0165	960	22	33	43	49	52	65
≥ M14	9.95	1.25	4	30	0.0165	960	22	33	43	49	52	65
≥ M14	9.95	1.50	4	30	0.0165	960	22	33	43	49	52	65
≥ M18	11.95	1.00	4	30	0.0200	800	22	33	43	49	52	65
≥ M18	11.95	1.50	4	30	0.0200	800	22	33	43	49	52	65
≥ M24	15.95	1.00	5	30	0.0265	600	27	40	53	60	64	80
≥ M24	15.95	2.00	5	30	0.0265	600	27	40	53	60	64	80
≥ M30	19.95	1.50	5	30	0.0335	480	27	40	53	60	64	80
≥ M30	19.95	2.00	5	30	0.0335	480	27	40	53	60	64	80
≥ M14	9.95	1.00	4	45	0.0200	1440	38	58	77	86	92	115
≥ M14	9.95	1.25	4	45	0.0200	1440	38	58	77	86	92	115
≥ M14	9.95	1.50	4	45	0.0200	1440	38	58	77	86	92	115
≥ M18	11.95	1.00	4	45	0.0240	1200	38	58	77	86	92	115
≥ M18	11.95	1.50	4	45	0.0240	1200	38	58	77	86	92	115
≥ M24	15.95	1.00	5	45	0.0320	900	48	73	97	109	116	145
≥ M24	15.95	2.00	5	45	0.0320	900	48	73	97	109	116	145
≥ M30	19.95	1.50	5	45	0.0400	720	48	73	97	109	116	145
≥ M30	19.95	2.00	5	45	0.0400	720	48	73	97	109	116	145

Material

Cast iron
GG(G)



Wrought aluminium
alloys Si < 6%

Cast aluminium

Titanium alloys
> 300 HB
[Ti6Al4V]

M	D1 [mm]	P [mm]	z	v _c [m/min]	f _z [mm]	n [min ⁻¹]	v _{fc} dD1 3/2	v _{fc} dD1 2/1	v _{fc} dD1 3/1	v _{fc} dD1 4/1	v _{fc} dD1 > 5/1	v _f [mm/min]
≥ M14	9.95	1.00	4	120	0.0250	3840	128	193	257	289	308	385
≥ M14	9.95	1.25	4	120	0.0250	3840	128	193	257	289	308	385
≥ M14	9.95	1.50	4	120	0.0250	3840	128	193	257	289	308	385
≥ M18	11.95	1.00	4	120	0.0300	3195	128	193	257	289	308	385
≥ M18	11.95	1.50	4	120	0.0300	3195	128	193	257	289	308	385
≥ M24	15.95	1.00	5	120	0.0400	2395	160	240	320	360	384	480
≥ M24	15.95	2.00	5	120	0.0400	2395	160	240	320	360	384	480
≥ M30	19.95	1.50	5	120	0.0500	1915	160	240	320	360	384	480
≥ M30	19.95	2.00	5	120	0.0500	1915	160	240	320	360	384	480
≥ M14	9.95	1.00	4	150	0.0285	4800	182	273	363	409	436	545
≥ M14	9.95	1.25	4	150	0.0285	4800	182	273	363	409	436	545
≥ M14	9.95	1.50	4	150	0.0285	4800	182	273	363	409	436	545
≥ M18	11.95	1.00	4	150	0.0340	3995	182	273	363	409	436	545
≥ M18	11.95	1.50	4	150	0.0340	3995	182	273	363	409	436	545
≥ M24	15.95	1.00	5	150	0.0455	2995	227	340	453	510	544	680
≥ M24	15.95	2.00	5	150	0.0455	2995	227	340	453	510	544	680
≥ M30	19.95	1.50	5	150	0.0570	2395	228	343	457	514	548	685
≥ M30	19.95	2.00	5	150	0.0570	2395	228	343	457	514	548	685
≥ M14	9.95	1.00	4	200	0.0285	6400	243	365	487	548	584	730
≥ M14	9.95	1.25	4	200	0.0285	6400	243	365	487	548	584	730
≥ M14	9.95	1.50	4	200	0.0285	6400	243	365	487	548	584	730
≥ M18	11.95	1.00	4	200	0.0340	5330	242	363	483	544	580	725
≥ M18	11.95	1.50	4	200	0.0340	5330	242	363	483	544	580	725
≥ M24	15.95	1.00	5	200	0.0455	3990	303	455	607	683	728	910
≥ M24	15.95	2.00	5	200	0.0455	3990	303	455	607	683	728	910
≥ M30	19.95	1.50	5	200	0.0570	3190	303	455	607	683	728	910
≥ M30	19.95	2.00	5	200	0.0570	3190	303	455	607	683	728	910
≥ M14	9.95	1.00	4	35	0.0200	1120	30	45	60	68	72	90
≥ M14	9.95	1.25	4	35	0.0200	1120	30	45	60	68	72	90
≥ M14	9.95	1.50	4	35	0.0200	1120	30	45	60	68	72	90
≥ M18	11.95	1.00	4	35	0.0240	930	30	45	60	68	72	90
≥ M18	11.95	1.50	4	35	0.0240	930	30	45	60	68	72	90
≥ M24	15.95	1.00	5	35	0.0320	700	37	55	73	83	88	110
≥ M24	15.95	2.00	5	35	0.0320	700	37	55	73	83	88	110
≥ M30	19.95	1.50	5	35	0.0400	560	37	55	73	83	88	110
≥ M30	19.95	2.00	5	35	0.0400	560	37	55	73	83	88	110



Incool

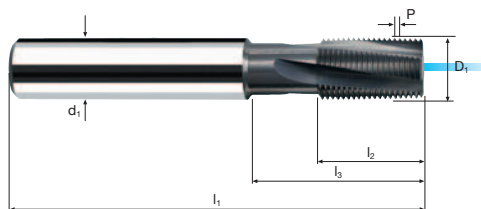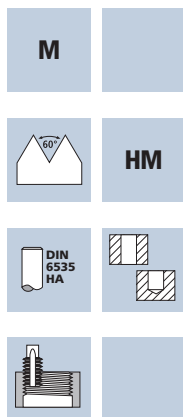

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	Aluminium GG(G)
--------------------	-----------------------	------------------------	------------------------	---------------------	--	--	--------------------------	-----------------------	----------------------------------

[illegible]

Incool

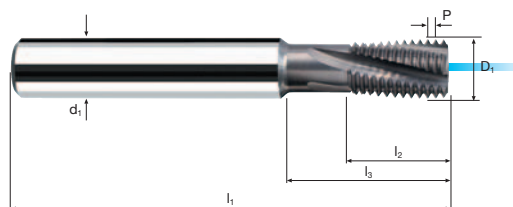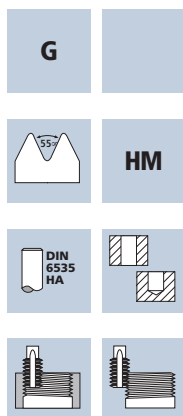

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	Aluminium GG(G)
--------------------	-----------------------	------------------------	------------------------	---------------------	--	--	--------------------------	-----------------------	---------------------------

[illegible]

Application



Material

Steel
850 - 1100 N/mm²

M	D1 [mm]	P [mm]	z	v _c [m/min]	f _z [mm]	n [mm ⁻¹]	v _{fc} [mm/min]	v _f [mm/min]
M 1	0.70	0.25	3	120	0.0020	54570	98	325
M 2	1.50	0.40	3	120	0.0040	25465	76	305
M 3	2.20	0.50	3	120	0.0055	17365	76	285
M 4	3.10	0.70	3	120	0.0080	12320	66	295
M 5	3.80	0.80	3	120	0.0095	10050	68	285
M 6	4.70	1.00	3	120	0.0120	8125	64	295
M 8	5.90	1.25	5	120	0.0150	6475	127	485
M10	7.90	1.50	5	120	0.0200	4835	102	485

Steel
1300 - 1500 N/mm²

M 1	0.70	0.25	3	100	0.0010	45475	41	135
M 2	1.50	0.40	3	100	0.0025	21220	40	160
M 3	2.20	0.50	3	100	0.0035	14470	40	150
M 4	3.10	0.70	3	100	0.0050	10270	35	155
M 5	3.80	0.80	3	100	0.0065	8375	40	165
M 6	4.70	1.00	3	100	0.0080	6775	36	165
M 8	5.90	1.25	5	100	0.0100	5395	71	270
M10	7.90	1.50	5	100	0.0130	4030	55	260

Stainless steel
[Cr-Ni/1.4301]

M 1	0.70	0.25	3	80	0.0010	36380	33	110
M 2	1.50	0.40	3	80	0.0025	16975	31	125
M 3	2.20	0.50	3	80	0.0035	11575	32	120
M 4	3.10	0.70	3	80	0.0050	8215	28	125
M 5	3.80	0.80	3	80	0.0060	6700	29	120
M 6	4.70	1.00	3	80	0.0070	5420	25	115
M 8	5.90	1.25	5	80	0.0090	4315	51	195
M10	7.90	1.50	5	80	0.0120	3225	41	195

Nickel base alloys

M 1	0.70	0.25	3	60	0.0010	27285	24	80
M 2	1.50	0.40	3	60	0.0025	12735	24	95
M 3	2.20	0.50	3	60	0.0035	8680	24	90
M 4	3.10	0.70	3	60	0.0050	6160	20	90
M 5	3.80	0.80	3	60	0.0060	5025	22	90
M 6	4.70	1.00	3	60	0.0070	4065	18	85
M 8	5.90	1.25	5	60	0.0090	3235	38	145
M10	7.90	1.50	5	60	0.0120	2420	30	145

Material

Wrought aluminium
alloys Si < 6%

M	D1 [mm]	P [mm]	z	v _c [m/min]	f _z [mm]	n [mm ⁻¹]	v _{fc} [mm/min]	v _f [mm/min]
M 1	0.70	0.25	3	150	0.0015	60000	81	270
M 2	1.50	0.40	3	150	0.0035	31830	84	335
M 3	2.20	0.50	3	150	0.0050	21705	87	325
M 4	3.10	0.70	3	150	0.0070	15405	73	325
M 5	3.80	0.80	3	150	0.0085	12565	77	320
M 6	4.70	1.00	3	150	0.0105	10160	69	320
M 8	5.90	1.25	5	150	0.0130	8095	138	525
M10	7.90	1.50	5	150	0.0175	6045	111	530

Cast aluminium

M 1	0.70	0.25	3	180	0.0020	60000	108	360
M 2	1.50	0.40	3	180	0.0040	38200	115	460
M 3	2.20	0.50	3	180	0.0055	26045	115	430
M 4	3.10	0.70	3	180	0.0080	18485	100	445
M 5	3.80	0.80	3	180	0.0095	15080	103	430
M 6	4.70	1.00	3	180	0.0120	12190	95	440
M 8	5.90	1.25	5	180	0.0150	9710	192	730
M10	7.90	1.50	5	180	0.0200	7255	152	725



Unalloyed copper

M 1	0.70	0.25	3	100	0.0015	45475	62	205
M 2	1.50	0.40	3	100	0.0030	21220	48	190
M 3	2.20	0.50	3	100	0.0045	14470	52	195
M 4	3.10	0.70	3	100	0.0060	10270	42	185
M 5	3.80	0.80	3	100	0.0075	8375	46	190
M 6	4.70	1.00	3	100	0.0095	6775	42	195
M 8	5.90	1.25	5	100	0.0120	5395	85	325
M10	7.90	1.50	5	100	0.0160	4030	67	320

Titanium alloys
> 300 HB
[Ti6Al4V]

M 1	0.70	0.25	3	70	0.0010	31830	29	95
M 2	1.50	0.40	3	70	0.0025	14855	28	110
M 3	2.20	0.50	3	70	0.0035	10130	28	105
M 4	3.10	0.70	3	70	0.0050	7190	25	110
M 5	3.80	0.80	3	70	0.0060	5865	25	105
M 6	4.70	1.00	3	70	0.0070	4740	22	100
M 8	5.90	1.25	5	70	0.0090	3775	45	170
M10	7.90	1.50	5	70	0.0120	2820	36	170

3.0xd

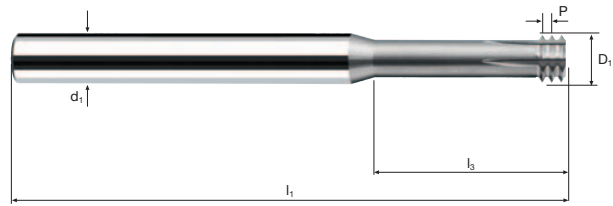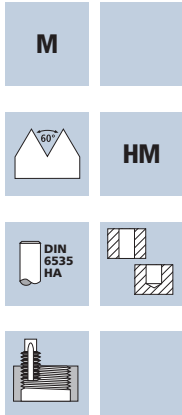

Rm ≤ 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500				Inox Stainless	Ti Titanium	Aluminium GG(G) Nickel-Alloys
--------------------	-----------------------	------------------------	------------------------	--	--	--	--------------------------	-----------------------	--

[illegible]



Drilling tool information

424 – 429

Thread cutting tool information

430 – 449

General information

450 – 460

Legend to the product page of drilling tools

Tool technologies



Drilling tools with four chamfers (Two friction and two guide lands)

- Improved straightness of the hole
- Improved hole quality and alignment
- Less deviation of the hole when drilling through cross holes
- Precise holes with good surface and maximum support of the tool upon exit



Drilling tool with optimised polished flutes and internal cooling

- Reduction of friction and therefore less adhesion, improved chip formation and lower heat generation



Drilling tool with optimised polished flutes, without internal cooling

- Reduction of friction and therefore less adhesion, improved chip formation and lower heat generation



Drilling tool with shank of h5 tolerance

- High concentricity and roundness
- Optimal for modern precision chucks

Cutting tool substrate material

**HM
XA**

Fine grain carbide. Hardness 1950 HV. Co content 8%. Characterised by a particularly high level of abrasion resistance.

**HM
MGX**

High-performance fine grain carbide with ultrafine tungsten carbides. Hardness 1610 HV. Co content 10%.

**HM
MG10**

Fine grain carbide. Hardness 1600 HV. Co content 10%.

**HM
MGD²**

Fine grain carbide with high bending and shear strength combined with good elasticity.

HM

Universal fine grain carbide.

HSS

High-performance substrate material, conventionally melted HSS alloy.

Legend to the product page of drilling tools

Internal cooling



Drills with internal cooling show improved chip formation and better chip removal which in turn results in an improved tool life.



Drills without internal cooling.

Point angle and helix angle



The point angle influences decisively the spectrum of materials that can be drilled. Further, small point angles bring a better centering behaviour; large point angles reduce the torque.



The helix angle influences decisively the rake angle on the major cutting edge (drill point) of the drill. Therefore, large helix angles are used for soft materials, small helix angles for hard and brittle materials.

Versions and dimensions of spiral flute drills

Spiral flute drills carbide, 3xd

The dimensions of this tool correspond to DIN 6537 K «Spiral flute drills carbide with offset cylindrical shank».

Spiral flute drills carbide, 5xd

The dimensions of this tool correspond to DIN 6537 L «Spiral flute drills carbide with offset cylindrical shank».

Spiral flute drills carbide and deep hole drills carbide, greater than 5xd

According to company standard.

Spiral flute drills carbide 8xd, optimised

According to company standard, but with optimised l/d ratio for optimum tool stability.

Special versions and dimensions

90°

Indication of the point angle for center drills or counterbores.
Counterbores 90° to DIN 335

Drilling depths

Indication of the nominal drilling depth. (Example: 5xd: five times drill diameter).

The nominal drilling depth does not correspond to the maximum depth! The maximum drilling depth is specified under L_{max} .

Legend to the product page of drilling tools

Shape of the shank / Shank versions

-  Full carbide tools with a cylindrical shank: shank version in accordance with DIN 6535 HA
-  Full carbide tools with a cylindrical shank and a side clamping surface. Shank version in accordance with DIN 6535 HB
-  Carbide Micro drills and Deep hole drills with cylindrical shank: Shank design to company standard.

Application suitability

-  A blue background means that the tool is particularly suitable for this material.
-  A light blue background means that the tool has good to adequate suitability for this material.

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	
--------------------	-----------------------	------------------------	------------------------	---------------------	---------------------	--------------------	--------------------------	-----------------------	--

Additional material which can be machined is stated in the additional field

Abbreviations

- d₁** Diameter of the cutting edge [mm]
- d₂** Diameter of the shank [mm]
- d₃** Face-surface diameter on rose countersinks [mm]
- l₁** Total length of the tool [mm]
- l₂** Length of the chip groove [mm]
- l₃** Length of the 2nd step (Step drills) [mm]
- l₄** Length of the shank [mm]
- L_{max}** Maximum drilling depth of the tool
- L_k** Drill depth for chamfered edge (Step drills)

Technical notes regarding use of drilling tools

Lubrication and coolant pressure

Basically, when drilling work with lubricant. The goal is more efficient chip removal and heat reduction. Hardened steel or abrasive materials can be cooled by using air or treated with MQL (minimal quantity lubrication).

If the coolant is applied externally, ensure the correct positioning of the coolant jet. This should be in the flute (directed parallel to the helix angle) and the entrance to the hole.

The use of internal cooling (internal coolant supply) can increase tool life. It is necessary, depending on the tool diameter, to apply a minimum coolant pressure.

The following table provides a guideline for the recommended Fraisa coolant pressure for IKZ drills:

Required coolant pressure for spiral flute drills with internal coolant emulsion						
Versions	< ø 3 mm	ø 3-5 mm	ø 5-8 mm	ø 8-12 mm	ø 12-16 mm	ø 16-20 mm
up to 5xd	60 bar	50 bar	30 bar	25 bar	20 bar	15 bar
8xd – 30xd	80 bar	60 bar	40 bar	30 bar	25 bar	20 bar
Required coolant pressure for spiral flute drills with internal coolant/MQL (minimal quantity lubrication)						
Versions	< ø 3 mm	ø 3-5 mm	ø 5-8 mm	ø 8-12 mm	ø 12-16 mm	ø 16-20 mm
up to 5xd	12 bar	10 bar	9 bar	8 bar	8 bar	7 bar
8xd – 30xd	14 bar	12 bar	10 bar	9 bar	9 bar	8 bar

Concentricity

The concentricity of the drilling process is an important process influencing variable. The eccentricity should be as small as possible, as this greatly influences the development of tool wear. The rotation should be controlled especially for hole diameters less than 6 mm. The control measurement is made when the drilling tool is in the clamped condition and in the machine spindle.

The following table provides a guideline from Fraisa for the recommended maximum eccentricity:

Maximum eccentricity of spiral flute drills						
Diameter range	< ø 1 mm	ø 1-3 mm	ø 3-6 mm	ø 6-10 mm	ø 10-16 mm	ø 16-20 mm
Maximum eccentricity	3 µm	5 µm	10 µm	15 µm	20 µm	25 µm

Centering and pilot hole

Drilling tools must always be set at right angles to the workpiece. If drilling is required on an inclined surface, an additional machining operation may be necessary to align the workpiece surface at a right angle to the drilling tool.

The point angle of the center drill should always be larger than the point angle of the subsequent spiral flute drill. Thus, an optimum centering of the drill and lower development of tool wear is achieved.


The following recommendation is from Fraisa for centering and pilot holes:

Versions	Cutting material	Recommendation
up to 5xd	Carbide	No
up to 5xd	HSS	Yes
8xd	Carbide	Optional. An improvement of positional accuracy can be achieved by centering.
12xd – 30xd	Carbide	Yes, a pilot hole is required (see page 428)

Technical notes regarding use of deep hole drills

Fraisa SA recommends the following drilling strategy to increase both service life and reliability:

Step 1




Pilot hole = $1.5 \times d$.

e.g. Supradrill® U 3xd. B62011.

The pilot hole must be free of chips prior to insertion of the deep-hole drill!

Step 2




Insert the tool into the hole at max. 300 1/min

and $v_f = 1000\text{mm/min}$.


Without cooling up to 1 mm from the bottom of the pilot hole.

Step 3



Using reduced cutting and feed speed, drill to approx. $3xd$. For this purpose, reduce the cutting and feed speed to 40% of the cutting data recommended by Fraisa. Coolant feed is switched on.


Step 4



Raise the spindle speed and feed speed to the recommended cutting data; without interrupting the feed, the drill must stay in contact.

Continue drilling without ventilation!

Step 5




Retract the deep-hole drill at

$v_f = 1000\text{mm/min}$ – up to $1.5 \times d$ from the hole entry.

Position as in step 2.

Step 6



Next reduce the spindle speed to max. 300 1/min.

Coolant feed is switched off.

Withdraw the drill from the drilled hole.

SAFETY NOTE

Outside of the drill hole, long deep-hole drills may only turn at a low speed (max. 300 1/min). Higher spindle speeds can cause such tools to vibrate, leading to spontaneous failure.

Calculation formulas for cutting data

d₁	Diameter of the cutting edge [mm]
v_c	Cutting speed [m/min]
f	Feed per rotation [mm]
n	Spindle speed [min ⁻¹]
v_f	Feed rate [mm/min]
Q	Material removal rate [cm ³ /min]
T	Primary processing time for the maximum drill depth of the tool [sec]
L	Effective drill depth [mm]

Spindle speed	$n = \frac{v_c \cdot 1000}{d_1 \cdot \pi} \left[\frac{1}{\text{min}} \right]$
---------------	--

Cutting speed	$v_c = \frac{d_1 \cdot n \cdot \pi}{1000} \left[\frac{\text{m}}{\text{min}} \right]$
---------------	---

Feed rate	$v_f = f \cdot n \left[\frac{\text{mm}}{\text{min}} \right]$
-----------	---

Material removal rate	$Q = \frac{d_1^2 \cdot \pi \cdot v_f}{4 \cdot 1000} \left[\frac{\text{cm}^3}{\text{min}} \right]$
-----------------------	--

Primary processing time	$T = \frac{L}{v_f} \cdot 60 \left[\text{sec} \right]$
-------------------------	--

Thread cutting tool material codes

Taps



08

Steel < 850 N/mm²

11

Steel 850 - 1100 N/mm²

15

Steel 1100 - 1500 N/mm²

60

Hardened tool steel 48 - 60 HRC

ln

Stainless steel

GG

Cast iron (lamellar/spheroidal)

Al

Aluminium

Ti

Titanium alloys

Ni

Nickel base alloys prec.-hardness

R

Universal Rigid

U

Universal

Cold forming taps



St

Steel

Al

Aluminium

U

Universal

Legend to the product page of thread cutting tools

Thread types

M	Metric coarse thread according to ISO DIN 965 (DIN 13)
MF	Metric fine thread according to ISO DIN 965 (DIN 13)
MJ	MJ thread for aerospace use according to DIN ISO 5855
G	Whitworth pipe thread according to DIN ISO 228
UNC	Unified coarse thread according to ASME B1.1
UNJC	Unified coarse thread according to SAE AS 8879
UNF	Unified fine thread according to ASME B1.1
UNJF	Unified fine thread according to SAE AS 8879
NPT	Conical american coarse thread according to ANSI B1.20.1
NPTF	Conical american coarse thread according to ANSI B1.20.3
EG M	Metric coarse thread for inserts according to DIN 8140-2



Legend to the product page of thread cutting tools

Application classes / Tolerance positions

ISO 2 (6H)	Tools of application class 2 (ISO 2) are designed for the production of threads with the tolerance fields 4G, 5G, 6H.
ISO 1 (4H)	Tools of application class 1 (ISO 1) are designed for the production of threads with the tolerance fields 4H, 5H.
ISO 3 (6G)	Tools of application class 3 (ISO 3) are designed for the production of threads with the tolerance fields 6G, 7H, 8H.
7G	Tools of application class 7G are preventively designed for the production of threads with the tolerance fields 7G, 8G, where subsequent heat treatment may cause dimensional distortions.
ISO 2 +0,1	Tools of application class 2 (ISO 2) are designed for the production of threads with the tolerance fields 4G, 5G, 6H. For threads which will get a galvanic coating of 0.025 mm thickness the tools are designed with an increased thread tolerance of 0.1 mm.
4H	Tools of application class 4H are designed for the production of threads MJ with the tolerance field 4H (ASME B1.1).
2B	Tools of application 2B are designed for the production of threads with the tolerance field 2B.
3B	Tools of application 3B are designed for the production of threads with the tolerance field 3B.
6H mod	Tools of application 6H are designed for the production of threads for inserts.

Cutting tool substrate material

HSS PM/F	High-performance cutting tool substrate material, powder metallurgically produced HSS alloys.
HSS-E Co5	High-performance substrate material, conventionally melted HSS alloy. Co-content 5%.
HM MG10	Universal fine-grain carbide. Hardness 1600 HV. Co-content 10%.
HM	Universal fine-grain carbide.

Legend to the product page of thread cutting tools

Thread norm



The teeth profiles of the tool correspond to the specified norm (see «Thread types»).

Form of the shanks



Cylindrical shank execution according to the specified tool norms.



Cylindrical shank execution with flat according to the specified tool norms.



Cylindrical shank execution with square end according to the specified tool norms.



Cylindrical shank execution with square end similar to the specified tool norms.



Cylindrical shank execution with square end.

Bore forms

The thread core bore must have the correct diameter.
(General rule for threading: bore diameter = thread diameter - pitch)



The tool is suitable for the fabrication of blind hole threads.



The tool is suitable for the fabrication of through hole threads.



The tool is suitable for the fabrication of blind hole and through hole threads.



The tool is suitable for the production of conical through and blind hole threads.

Legend to the product page of thread cutting tools

Chamfer forms / Lead-in cone forms



Chamfer form for taps according to DIN 2197, table 4, type B. The pitch number in the chamfer is between 3.5 and 5.



Chamfer form for taps according to DIN 2197, table 4, type C. The pitch number in the chamfer is between 2 and 3. Lead-in cone form for thread former according to DIN 2175, table 4: type C. The length of the lead-in cone is between 2 to 3 times the pitch.



Lead-in cone form for thread former according to DIN 2175, table 4: type E. The length of the lead-in cone is at most double the pitch.

Chip flow



Tool with chip flow in feed direction.



Tool with chip flow against the feed direction.



Tool for short chipping work piece materials.

Cold forming taps



Tool with polygon profile without lubrication grooves.



Tool with polygon profile with lubrication grooves.

Thread milling cutters



The tool is suitable for the fabrication of internal threads.



The tool is suitable for the fabrication of external threads.

Legend to the product page of thread cutting tools

Application suitability



A blue background means that the tool is particularly suitable for this material.



A light blue background means that the tool has good to adequate suitability for this material.



Additional material which can be machined is stated in the additional field



Cooling lubricants

For the process of thread cutting and in particular for thread forming a good lubrication is essential. Especially for deeper threads proper lubrication is very important.

Best results for threading can be achieved by using oil (lubrication effect). The machining with an emulsion of at least 5% is also possible.



Oil must be used as lubricant.




Oil with special additives must be used as lubricant.



Choose diameter of the drill hole according to column critical material on page 445.



Technical notes regarding use of thread cutting tools



Thread cutting with functional performance of the compensation chuck

A satisfactory compensation function of the chuck must be guaranteed (no jamming). Otherwise, despite the chuck, the thread may be miscut or pitch errors can arise. The torque level of the compensation chuck must be selected according to the thread type and the work piece material.


Programming of a too high RPM value can lead to problems. If a RPM is selected which cannot be reached (due to the inertia of the spindle), the result may be premature breakage of the tool or miscutting of the thread. A careful analysis often shows that high spindle speeds do not lead to overall significant time savings.




Rigid Tapping

Rigid tapping is designed for modern machines with synchronised spindle drives. All tools have a clamping flat and are used with conventional chucks.


When using Rigid tapping, a sufficient approach distance must be programmed. If the distance is too small, the machine spindle may not be able to properly synchronize with the feed before entering the drillhole. This will result in a pitch error of the thread, even with synchronous working.



For some machines, it is possible that the recommended spindle speed for synchronous operation cannot be reached. In these cases it is necessary to operate at the highest possible spindle speed where synchronism of the machine is still guaranteed.



Thread cutting with functional performance of the compensation chuck or Rigid Tapping



Technical notes regarding use of thread cutting tools




Hardness increase during drilling

For drilling, care has to be taken to ensure that a sharp, intact drill is used. If the wear is already too great, there is a risk that hardening of the periphery will occur during drilling. One result of this hardening may be the tap breaking.



Age or precipitation hardening and upsetting the countersink

When preparing for tapping, quality tools should be used which are adapted to the material. If the counterbore is too worn, the countersink will harden or be upset. This means the tap will encounter problems as soon as it starts to cut. This can lead to breakage right at the beginning. The countersink is important in guiding the tap.



Deeper threads

For deep threads, tools must be chosen with sufficiently long flutes. There is otherwise a risk of tool breakage due to chip build-up, because the chips cannot flow out of the hole. With Rigid Tapping, pecking in several steps can be programmed, in order to shorten the chips. Sufficient cooling is important.



Functional performance of the compensation chuck

A satisfactory compensation function of the chuck must be guaranteed (no jamming). Otherwise, despite the chuck, the thread may be miscut or pitch errors can arise. The torque level of the compensation chuck must be selected according to the thread diameter.



Correctly adjusted coolant jet

A specifically aimed coolant jet is important in tapping work. The direction should be from above, in the direction of the flutes, so that the cooling is also effective at depth. If the coolant jet is not aimed, the problem of heat development in the drillhole arises, with the risk of cold welding-together of the material, which in turn may lead to reduced service life and poor chip formation.



Safety clearance

When using Rigid Tapping, a sufficient approach distance must be programmed. If the clearance is too small, the problem arises of the machine spindle not synchronising with the feed before entering the drillhole. This results in pitch error of the thread, even with synchronous working.



Suitability of the machine

On a number of machines, there is a possibility that the recommended RPM cannot be applied. In this case, the RPM of the machine should be programmed accordingly.




Inconstant RPM

Programming too high RPM can lead to problems: if a RPM is selected which cannot be achieved (due to the inertia of the machine), the result may be premature breakage of the tool or miscutting of the thread. If observed closely, it may often be seen that a high RPM does not in fact produce the time saving which was intended.

Technical notes regarding use of thread milling cutters

Thread milling cycle for M10 in ISO-code as an example

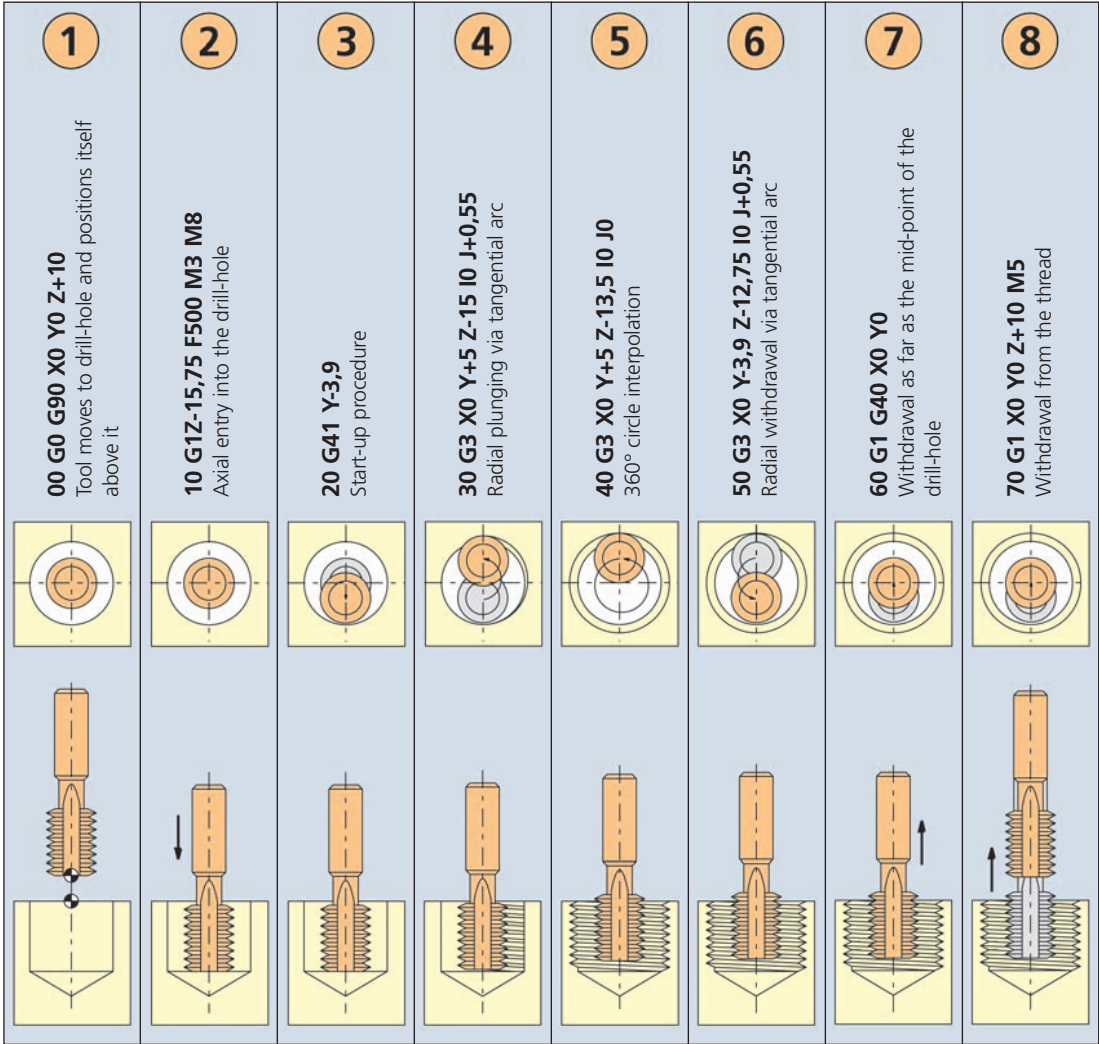


Meaning of the G and M commands used

G0	G1	G3	G40	G41	G90	G91	M3	M5	M8	M9
Linear motion at high speed	Linear motion with feed F in mm/min	Circular arc interpolation with mid-point (I, J)	Cancel too-radius correction	Tool-radius correction (tool to left of contour)	Absolute-measure-ment pro-gramming	Sequential-measure-ment pro-gramming	Spindle on (right-handed motion)	Spindel off	Cooling on	Cooling off


Technical notes regarding use of thread milling cutters

Thread milling cycle for drill / thread milling

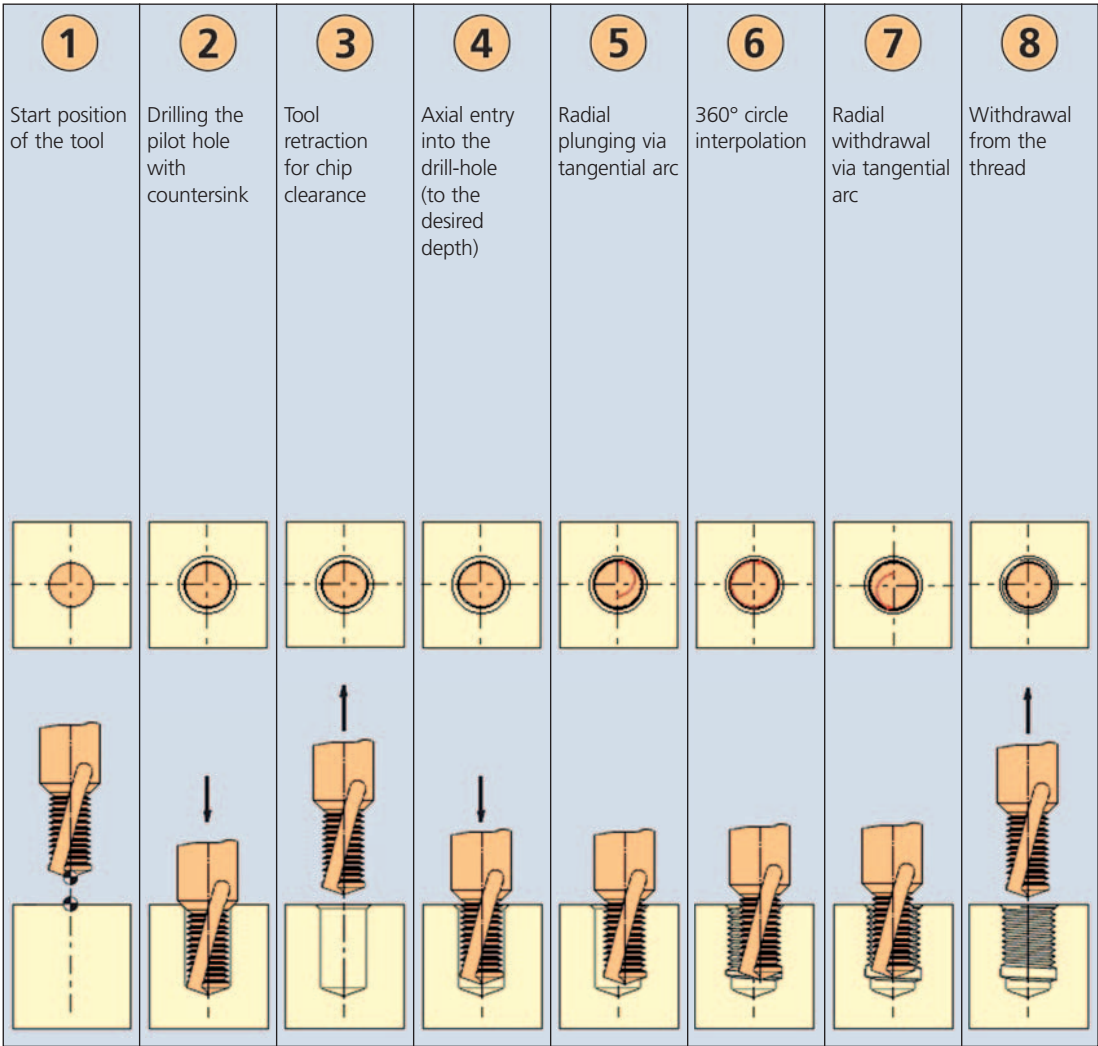


Technical notes regarding use of thread milling cutters

Thread milling cycle for thread milling cutter with chamfer

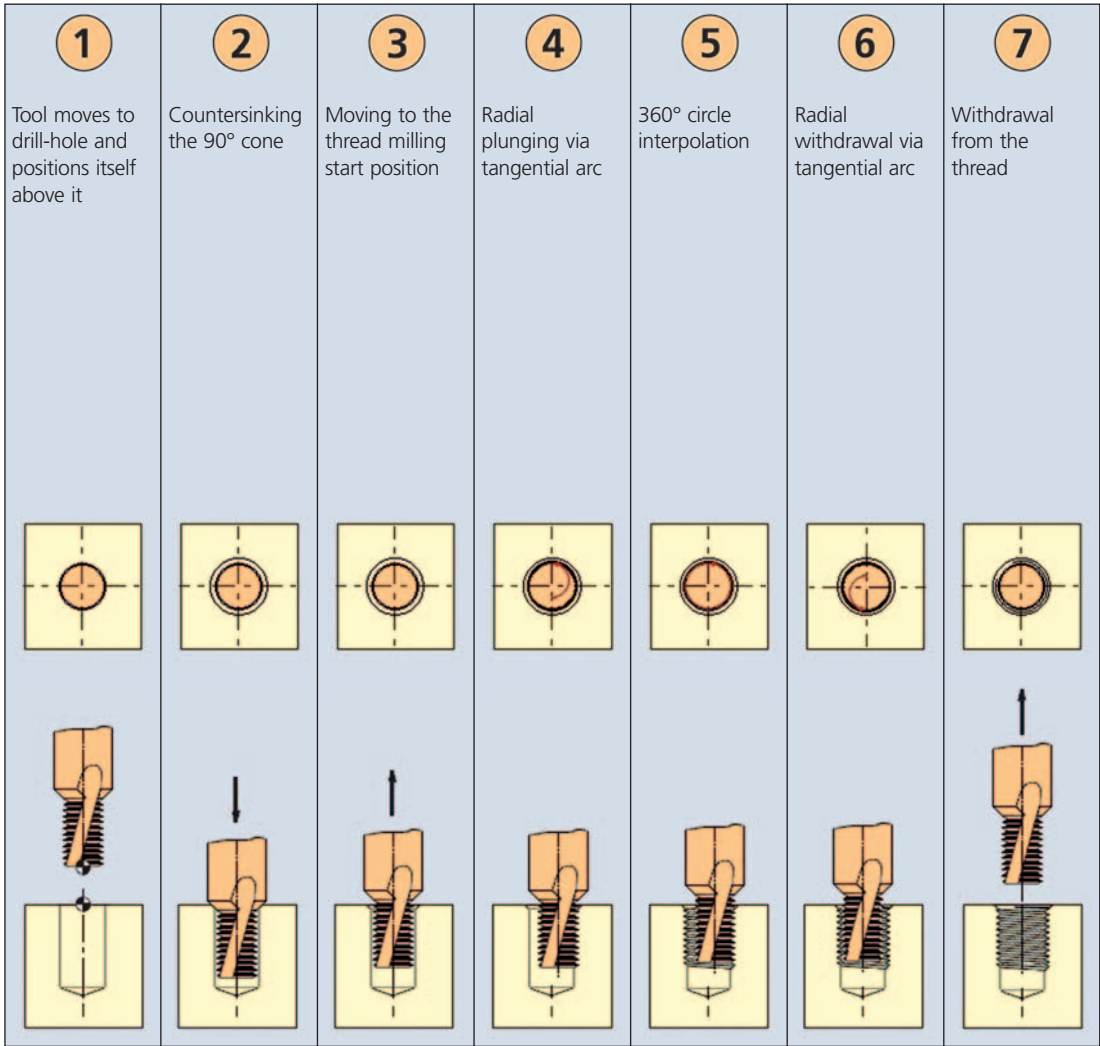


Technical notes regarding use of thread milling cutters

Thread milling cycle for right-handed thread (counter-clockwise-rotating) with thread whirler

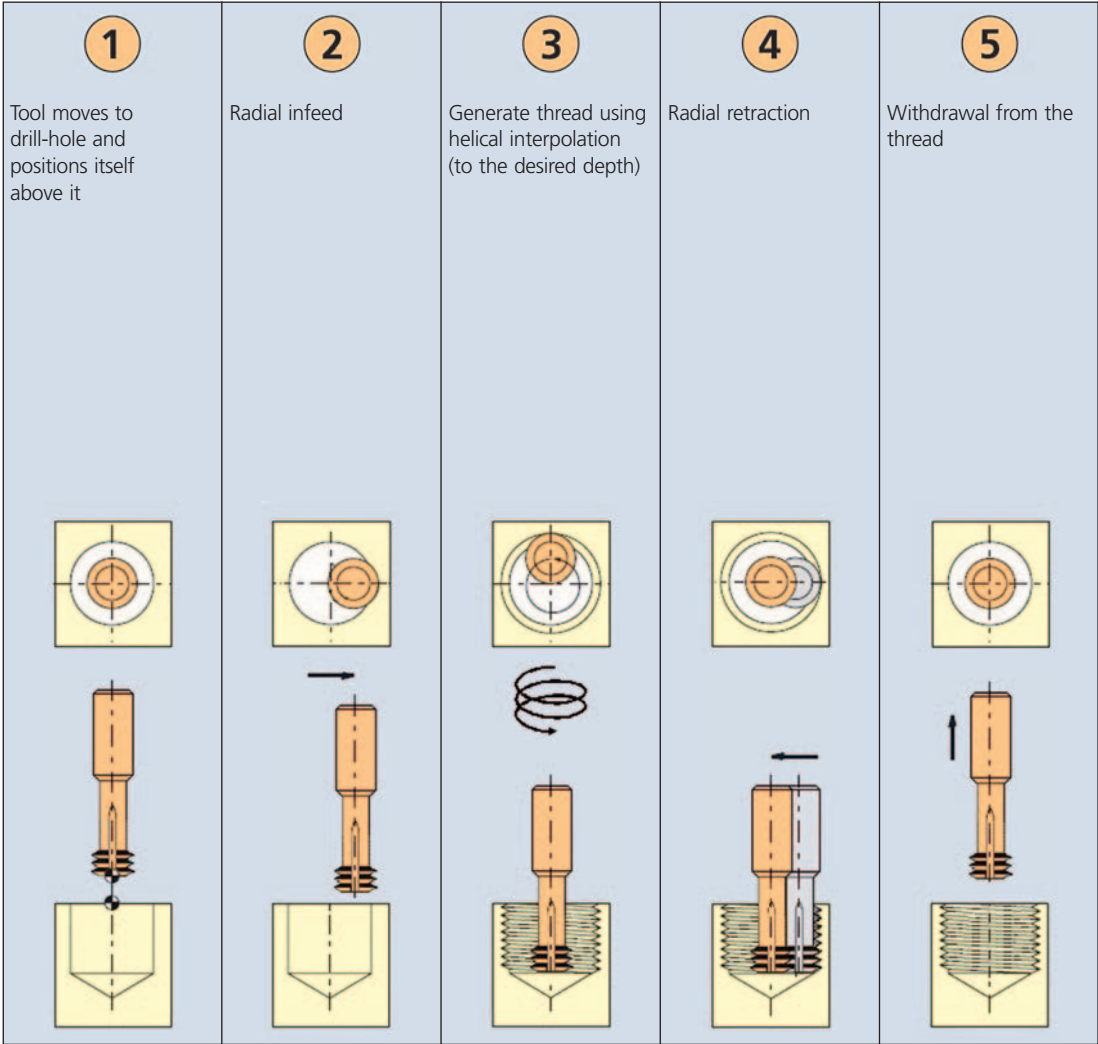


Technical notes regarding use of thread milling cutters

Thread milling cycle for right-handed thread (clockwise-rotating) with thread whirler

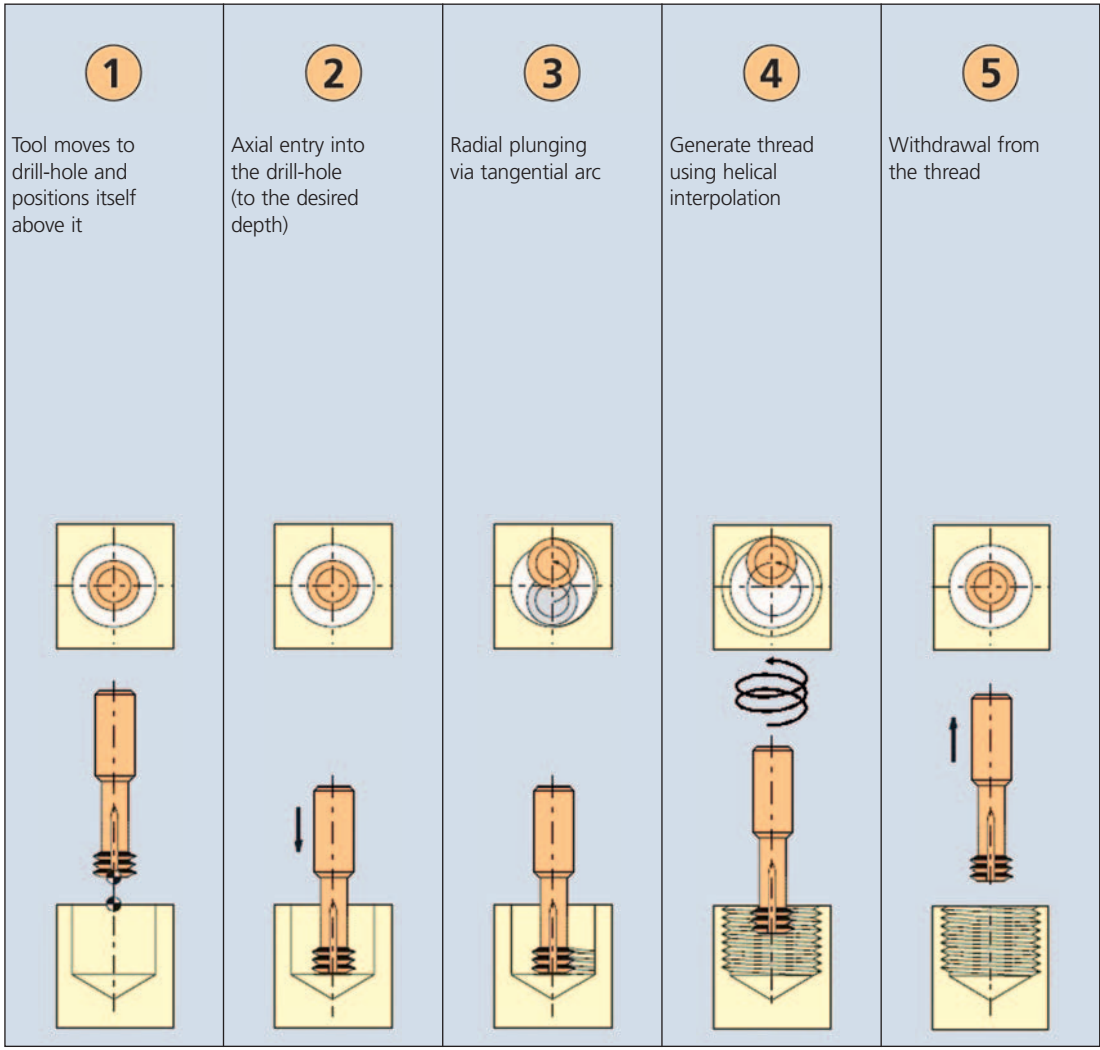


Technical notes regarding use of thread milling cutters

Specifying the feed speed

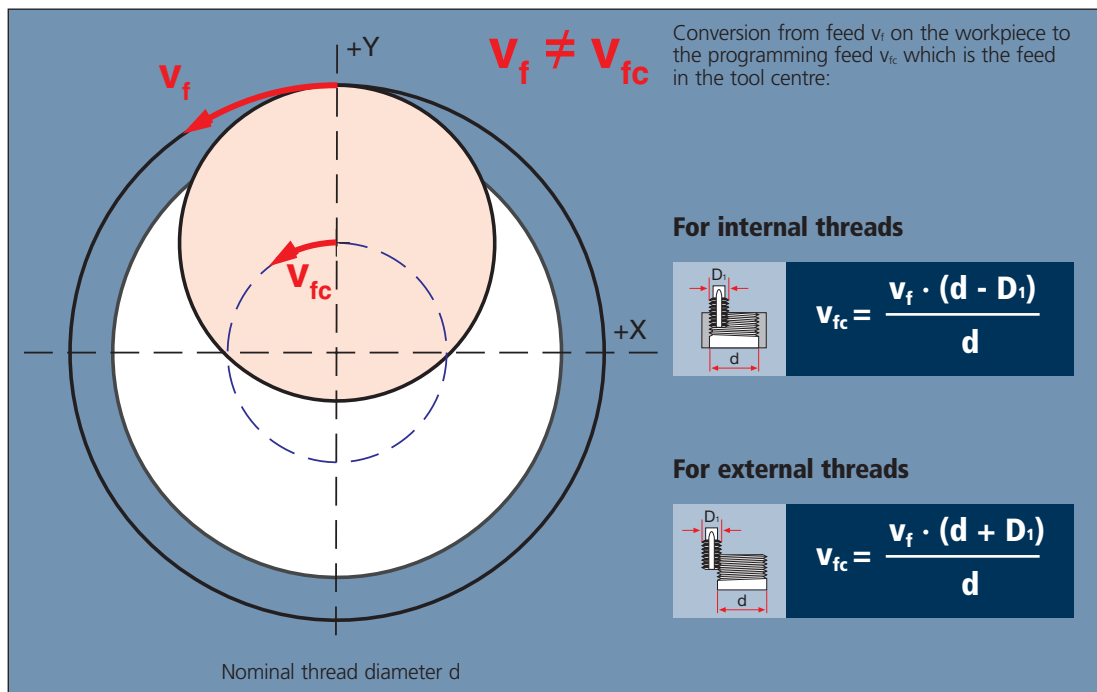

Avoiding profile distortions



In order to avoid profile distortions, the diameter of the thread milling cutter D_1 must not exceed $\frac{2}{3}$ of the nut core diameter d .

The overmeasure of the core drill-hole should be 0.1 to 0.3 mm.

The thread is thereby milled perfectly.

Formulas and abbreviations

a	Dimension of square end
d	Nominal diameter of the thread
d₁	Diameter of the shank
d₂	Drilling diameter of the drill / thread milling cutter
D₁	Diameter of the thread milling cutter
d/D₁	Ratio of diameters for the determination of the feed speed
R_k	Corrected milling cutter radius for ISO 2 (6H) thread tolerance (radius to be programmed in the machine control system)
f_z	Feed per tooth
l	Length of threaded section of the tap / thread former
l₁	Neck length of the tap / thread former or overall length of the thread milling cutter
l₂	Length of threaded section of the thread milling cutter
l₃	Flute length of the tap or neck length of the thread milling cutter
L	Overall length of the tap / thread former
L_K	Countersinking depth of the thread milling cutter with chamfer
n	Spindle speed
P	Thread pitch
v_c	Cutting speed
v_f	Feed rate
v_{fc}	Feed speed in the tool centre
	Number of flutes on the tap and thread cutter
	Number of form edges of cold forming taps
	Diameter differences of the thread flank, the thread outside and the thread core in the application class 2 (ISO 2) according to DIN 22857
R_m	Mechanical tensile strength
HRC	Hardness according to Rockwell C
HV	Hardness according to Vickers
HB	Hardness according to Brinell

Spindle speed

$$n = \frac{v_c \cdot 1000}{d_1 \cdot \pi} \left[\frac{1}{\text{min}} \right]$$

Cutting speed

$$v_c = \frac{d \cdot \pi \cdot n}{1000} \left[\frac{\text{m}}{\text{min}} \right]$$

Feed rate

$$v_f = P \cdot n \left[\frac{\text{mm}}{\text{min}} \right]$$

Core hole drill sizes

M					
ø	P	Max. dimension	Standard	Critical material*	
1.0	0.25	0.785	0.75	0.80 *	
1.2	0.25	0.985	0.95	1.00 *	
1.4	0.30	1.142	1.10	1.15 *	
1.6	0.35	1.321	1.25	1.30	
1.7	0.35	1.421	1.35	1.40	
1.8	0.35	1.521	1.45	1.50	
2.0	0.40	1.679	1.60	1.70	
2.2	0.45	1.838	1.75	1.85 *	
2.3	0.40	1.979	1.90	1.95	
2.5	0.45	2.138	2.05	2.10	
2.6	0.45	2.238	2.15	2.20	
3.0	0.50	2.599	2.50	2.60 *	
3.5	0.60	3.010	2.90	3.00	
4.0	0.70	3.422	3.30	3.40	
4.5	0.75	3.878	3.75	3.90 *	
5.0	0.80	4.334	4.20	4.30	
6.0	1.00	5.153	5.00	5.10	
7.0	1.00	6.153	6.00	6.10	
8.0	1.25	6.912	6.80	6.90	
10.0	1.50	8.676	8.50	8.60	
12.0	1.75	10.441	10.20	10.40	
14.0	2.00	12.210	12.00	12.20	
16.0	2.00	14.210	14.00	14.20	
18.0	2.50	15.744	15.50	15.70	
20.0	2.50	17.744	17.50	17.70	
22.0	2.50	19.744	19.50	19.70	
24.0	3.00	21.252	21.00	21.20	
27.0	3.00	24.252	24.00	24.20	
30.0	3.50	26.771	26.50	26.70	
33.0	3.50	29.771	29.50	29.70	
36.0	4.00	32.270	32.00	32.20	
39.0	4.00	35.270	35.00	35.20	
42.0	4.50	37.799	37.50	37.70	

MF					
ø	P	Max. dimension	Standard	Critical material*	
2.5	0.35	2.221	2.15	2.20	
3.0	0.35	2.721	2.65	2.70	
3.5	0.35	3.221	3.15	3.20	
4.0	0.50	3.599	3.50	3.60 *	
5.0	0.50	4.599	4.50	4.60 *	
6.0	0.50	5.599	5.50	5.60 *	
8.0	0.50	7.599	7.50	7.60 *	
10.0	0.50	9.599	9.50	9.60 *	
6.0	0.75	5.378	5.20	5.30	
7.0	0.75	6.378	6.25	6.30	
8.0	0.75	7.378	7.20	7.30	
10.0	0.75	9.378	9.20	9.30	
12.0	0.75	11.378	11.30	11.40 *	
14.0	0.75	13.378	13.30	13.40 *	
16.0	0.75	15.378	15.30	15.40 *	
8.0	1.00	7.153	7.00	7.10	
9.0	1.00	8.153	8.00	8.10	
10.0	1.00	9.153	9.00	9.10	
12.0	1.00	11.153	11.00	11.10	
13.0	1.00	12.153	12.00	12.10	
14.0	1.00	13.153	13.00	13.10	
15.0	1.00	14.153	14.00	14.10	
16.0	1.00	15.153	15.00	15.10	
17.0	1.00	16.153	16.00	16.10	
18.0	1.00	17.153	17.00	17.10	
20.0	1.00	19.153	19.00	19.10	
10.0	1.25	8.912	8.80	8.90	
12.0	1.25	10.912	10.80	10.90	
14.0	1.25	12.912	12.80	12.90	
16.0	1.25	14.912	14.80	14.90	
12.0	1.50	10.676	10.50	10.70 *	
14.0	1.50	12.676	12.50	12.70 *	
16.0	1.50	14.676	14.50	14.70 *	
18.0	1.50	16.676	16.50	16.70 *	
20.0	1.50	18.676	18.50	18.70 *	
22.0	1.50	20.676	20.50	20.70 *	
24.0	1.50	22.676	22.50	22.70 *	

* The given dimension is out of norm

Core hole drill sizes

UNC					
ø	P	Max. dimension	Standard	Critical material*	
1	64	1.582	1.55	1.60	*
2	56	1.872	1.85	1.90	*
3	48	2.146	2.10	2.15	*
4	40	2.385	2.35	2.40	*
5	40	2.697	2.65	2.70	*
6	32	2.896	2.85	2.90	*
8	32	3.531	3.50	3.50	
10	24	3.962	3.90	4.00	*
12	24	4.597	4.50	4.60	*
1/4	20	5.258	5.10	5.20	
5/16	18	6.731	6.60	6.70	
3/8	16	8.153	8.00	8.10	
7/16	14	9.550	9.40	9.50	
1/2	13	11.024	10.80	11.00	
9/16	12	12.446	12.20	12.40	
5/8	11	13.868	13.50	13.80	
3/4	10	16.840	16.50	16.80	
7/8	9	19.761	19.50	19.70	
1	8	22.601	22.30	22.60	

UNF					
ø	P	Max. dimension	Standard	Critical material*	
0	80	1.306	1.25	1.30	
1	72	1.613	1.55	1.60	
2	64	1.913	1.85	1.90	
3	56	2.197	2.15	2.20	*
4	48	2.459	2.40	2.45	
5	44	2.741	2.70	2.75	*
6	40	3.023	2.95	3.00	
8	36	3.607	3.50	3.60	
10	32	4.166	4.10	4.20	*
12	28	4.727	4.60	4.70	
1/4	28	5.588	5.50	5.60	*
5/16	24	7.036	6.90	7.00	
3/8	24	8.636	8.50	8.60	
7/16	20	10.033	9.90	10.00	
1/2	20	11.608	11.50	11.60	
9/16	18	13.081	12.90	13.00	
5/8	18	14.681	14.50	14.70	*
3/4	16	17.678	17.50	17.70	*
7/8	14	20.675	20.50	20.70	*
1	12	23.571	23.30	23.50	

UNJC					
ø	P	Max. dimension	Standard	Critical material*	
4	40	2.392	2.30	2.40	*
6	32	2.938	2.85	2.90	
8	32	3.599	3.50	3.60	*
10	24	4.064	3.90	4.00	
1/4	20	5.387	5.25	5.40	*
5/16	18	6.832	6.70	6.80	
3/8	16	8.257	8.10	8.20	

UNJF					
ø	P	Max. dimension	Standard	Critical material*	
6	40	3.053	3.00	3.05	
8	36	3.662	3.55	3.60	
10	32	4.254	4.15	4.20	
1/4	28	5.661	5.55	5.60	
5/16	24	7.109	7.00	7.10	
3/8	24	8.679	8.60	8.70	*

UNEF					
ø	P	Max. dimension	Standard	Critical material*	
1/4	32	5.689	5.60	5.70	*
5/16	32	7.264	7.20	7.30	*
3/8	32	8.864	8.80	8.90	*
7/16	28	10.337	10.20	10.30	
1/2	28	11.938	11.80	11.90	
9/16	24	13.385	13.20	13.40	*
5/8	24	14.986	14.80	15.00	*
11/16	24	16.560	16.40	16.50	
3/4	20	17.957	17.80	18.00	*
7/8	20	21.132	21.00	21.10	
1	20	24.307	24.20	24.30	

* The given dimension is out of norm

Core hole drill sizes

NPT 1:16 Conical reaming of the hole with a conical reamer 1:16 					
ø	P(TPI)	ø	D max	D min	L min
1/16	27	6.00	6.440	6.390	12.00
1/8	27	8.30	8.790	8.740	12.00
1/4	18	10.80	11.410	11.360	17.50
3/8	18	14.20	14.850	14.800	17.60
1/2	14	17.50	18.370	18.320	22.90
3/4	14	22.80	23.720	23.670	23.00
1	11.5	28.60	29.740	29.690	27.40

EG M 					
ø	P	Max. dimension	Standard	Critical material*	
2.0	0.40	2.177	2.15	2.20	*
2.5	0.45	2.697	2.65	2.70	*
3.0	0.50	3.220	3.15	3.20	
4.0	0.70	4.292	4.20	4.30	*
5.0	0.80	5.334	5.25	5.30	
6.0	1.00	6.407	6.30	6.40	
8.0	1.25	8.483	8.40	8.50	*
10.0	1.50	10.560	10.40	10.50	
12.0	1.75	12.644	12.50	12.60	
14.0	2.00	14.733	14.50	14.70	
16.0	2.00	16.733	16.50	16.70	

NPTF 1:16 Conical reaming of the hole with a conical reamer 1:16 					
ø	P(TPI)	ø	D max	D min	L min
1/16	27	6.00	6.460	6.410	12.00
1/8	27	8.30	8.810	8.760	12.00
1/4	18	10.80	11.450	11.400	17.50
3/8	18	14.20	14.890	14.840	17.60
1/2	14	17.50	18.380	18.330	22.90
3/4	14	22.80	23.730	23.680	23.00
1	11.5	28.60	29.770	29.720	27.40

EG MF 					
ø	P	Max. dimension	Standard	Critical material*	
8.0	1.00	8.407	8.30	8.40	
10.0	1.00	10.407	10.30	10.40	
12.0	1.50	12.560	12.50	12.50	
14.0	1.50	14.560	14.50	14.50	
16.0	1.50	16.560	16.50	16.50	

NPSM 					
ø	P	Max. dimension	Standard	Critical material*	
1/8	27	9.246	9.10	9.20	
1/4	18	12.217	12.00	12.20	
3/8	18	15.545	15.50	15.50	
1/2	14	19.279	19.00	19.20	
3/4	14	24.638	24.50	24.60	

EG UNC 					
ø	P	Max. dimension	Standard	Critical material*	
4	40	3.178	3.10	3.20	*
6	32	3.879	3.80	3.90	*
8	32	4.523	4.40	4.50	
10	24	5.283	5.20	5.30	*
1/4	20	6.872	6.70	6.90	*
5/16	18	8.490	8.40	8.50	*
3/8	16	10.126	10.00	10.10	
1/2	13	13.393	13.30	13.40	*

PG 					
ø	P	Max. dimension	Standard	Critical material*	
7	20	11.430	11.40	11.40	
9	18	14.010	14.00	14.00	
11	18	17.410	17.30	17.40	
13.5	18	19.210	19.10	19.20	
16	18	21.310	21.25	21.30	

EG UNF 					
ø	P	Max. dimension	Standard	Critical material*	
6	40	3.815	3.70	3.80	
8	36	4.496	4.40	4.50	*
10	32	5.184	5.10	5.20	*
1/4	28	6.720	6.60	6.70	
5/16	24	8.351	8.30	8.40	*
3/8	24	9.931	9.80	9.90	
7/16	20	11.587	11.50	11.60	*
1/2	20	13.176	13.10	13.20	*

* The given dimension is out of norm

www.fraisa.com

Hardness conversion table (R_m → HV10 → HB → HRC)

R _m [N/mm²]	HV 10	HB	HRC	R _m [N/mm²]	HV 10	HB	HRC
240	75	71		920	287	273	28
255	80	76		940	293	278	29
270	85	81		970	302	287	30
285	90	86		995	310	295	31
305	95	90		1020	317	301	32
320	100	95		1050	327	311	33
335	105	100		1080	336	319	34
350	110	105		1110	345	328	35
370	115	109		1140	355	337	36
385	120	114		1170	364	346	37
400	125	119		1200	373	354	38
415	130	124		1230	382	363	39
430	135	128		1260	392	372	40
450	140	133		1300	403	383	41
465	145	138		1330	413	393	42
480	150	143		1360	423	402	43
495	155	147		1400	434	413	44
510	160	152		1440	446	424	45
530	165	157		1480	458	435	46
545	170	162		1530	473	449	47
560	175	166		1570	484	460	48
575	180	171		1620	497	472	49
595	185	176		1680	514	488	50
610	190	181		1730	527	501	51
625	195	185		1790	544	517	52
640	200	190		1845	560	532	53
660	205	195		1910	578	549	54
675	210	199		1980	596	567	55
690	215	204		2050	615	584	56
705	220	209		2140	639	607	57
720	225	214			655	622	58
740	230	219			675		59
755	235	223			698		60
770	240	228			720		61
785	245	233			745		62
800	250	238	22		773		63
820	255	242	23		800		64
835	260	247	24		829		65
860	268	255	25		864		66
870	272	258	26		900		67
900	280	266	27		940		68



General conditions

1. General

- 1.1 The contract is concluded with the written confirmation (Order confirmation) of Fraisa SA or its subsidiaries (hereinafter known in short as «supplier») that it accepts the order.
- 1.2 Any deviation from the order in the order confirmation forms part of the contract, unless the purchaser rejects it in writing within 5 working days from the receipt date of the order confirmation. Quotations, particularly those involving price lists, brochures, etc., which contain no acceptance dates, are non-binding.
- 1.3 These delivery conditions shall be binding if they are declared as applicable in the quotation or order confirmation. Other conditions of the purchaser are only applicable if they have been expressly accepted by the supplier and this acceptance is in writing.
- 1.4 All agreements and legally relevant declarations of the parties need to be made in writing in order to be applicable.
- 1.5 If any provision of these delivery conditions should prove wholly or partially ineffective, the parties shall replace this provision with a new agreement which comes as close to the intended legal and economic outcome as possible.

2. Scope of the delivery and services

The supplier's deliveries and services are itemised in the order confirmation, including any appendices to it. The supplier is authorised to make changes that lead to improvements, where these do not increase the price.

3. Brochures, catalogues and technical documents

Brochures and catalogues are not binding without other agreements. Information contained in technical documents is only binding if it is explicitly assured.

4. Prices

- 4.1 All prices are - in the absence of any agreement - net prices, ex works, excluding packaging, in freely available Swiss Francs or the local currency of the subsidiaries, without any deductions.
- 4.2 All additional costs, e.g. for freight, insurance, export, import and other permits and certifications, shall be borne by the purchaser.
- 4.3 Likewise, the purchaser shall bear all taxes (especially VAT), levies, fees, duties (and the like) that are imposed in connection with the contract, or reimburse the supplier for them against corresponding proof, if the supplier has to pay for them.

5. Payment terms

- 5.1 The payments are to be made by the purchaser in accordance with agreed payment terms at the location of the supplier's office without the deduction of

discounts, expenses, taxes, duties, fees, duties (and the like). The obligation to make payment is fulfilled, when at the location of the supplier's office, the arranged amount have been made freely available to the supplier. The payment deadline is 30 days from the invoice date.

- 5.2 The payment deadline and/or the separately agreed payment deadlines must be met even if the transport, delivery or acceptance of the delivery is delayed or prevented for reasons for which the supplier is not responsible, if non-essential items are missing from the delivery, or if subsequent machining is necessary which does not make usage of the delivery impossible.
- 5.3 If the purchaser does not make payment by the payment deadline and/or the separately agreed payment deadline, he must, without notice, pay interest from the date the invoice is due at an interest rate based on the rate where the purchaser has his office, however at least 4% above the discount rate of the Swiss National Bank. The right to claim further damages is reserved.

6. Retention of title

- 6.1 The supplier shall retain ownership of all parts of the delivery until he has received the payments in accordance with the contract.
- 6.2 The purchaser is obliged to participate in measures which are necessary for the protection of the supplier's property; in particular, at the expense of the purchaser, he authorizes the supplier to register or enter the title in public records, books and the like according to the relevant national laws and to comply with all relevant formalities.
- 6.3 The purchaser shall maintain the delivered goods at his cost for the duration of retention of title and insure them on behalf of the supplier against theft, breakage, fire, water and other risks. He shall further take all measures to ensure that the supplier's property claim is in no way compromised nor cancelled.

7. Delivery deadline

- 7.1 The supplier shall strive to meet the delivery deadline which is recorded in the order confirmation. The delivery deadline is met if the «ready for despatch» message is sent to the purchaser by its expiry.
- 7.2 The meeting of the delivery deadline presupposes full compliance with the contractual obligations by the purchaser.
- 7.3 The delivery deadline shall be extended by an appropriate period if hindrances occur which, despite due care, the supplier cannot avert, regardless of whether they originate from him, the purchaser or a third party. Such hindrances include epidemics, mobilisation, war, riots, major breakdowns, accidents, labour disputes, delayed delivery or mistakes in the delivery of the necessary raw materials and semi-finished products, governmental actions or omissions, and natural events.

- 7.4 If a specific date is agreed upon instead of a delivery deadline, this is equivalent to the last day of a delivery deadline. Points 7.1 to 7.3 apply analogously.
- 7.5 In the case of delay, the purchaser is not entitled to compensation or other benefits, except for the agreement cited in point 7 or an agreement stipulated in a separate agreement. This restriction does not apply to unlawful intent or gross negligence on the part of the supplier.
- 8. Return of goods**
For commercial product returns up to CHF 1,000.00, it is necessary for us to charge a reduction of 10% of the value of the goods, however at least CHF 30.00 for checking costs incurred by us. In the case of higher return values, prior consent from FRAISA SA is required. Custom designs and products with special labeling may not be returned.
- 9. Packaging**
Packaging is separately charged by the supplier and cannot be returned.
- 10. Transfer of benefits and risks**
10.1 At the latest, benefits and risks are passed to the purchaser when the delivery leaves the factory.
10.2 If the shipment is delayed at the request of the purchaser or for other reasons which the supplier is not responsible for, the risk is passed to the purchaser for the originally scheduled date of delivery from the factory. From this point on, the supplied products are stored and insured at the purchaser's expense and risk.
- 11. Shipping, transportation and insurance**
11.1 The supplier must be informed of special requests concerning shipping, transportation and insurance in good time. Transportation takes place at the purchaser's expense and risk.
11.2 Complaints relating to the shipping or transportation should be addressed to the last carrier by the purchaser without delay upon receipt of the delivery or the shipping documents.
11.3 Insurance against all kinds of damage is the responsibility of the purchaser.
- 12. Checking and acceptance of the delivery**
12.1 The purchaser must check the delivery upon receipt within 8 days and notify the supplier of any defects within the same period in writing. Failing this, the supply shall be deemed approved.
12.2 The supplier shall resolve the defects which are notified to him in accordance with point 12.1 as quickly as possible, or - at his option - replace defective goods.
- 12.3 In the case of defects of any sort relating to the delivery, the purchaser has no rights or rights to make claims other than those specifically mentioned in points 12 and 13 (warranty, liability for defects).
- 13. Warranty, liability for defects**
13.1 The warranty period is 6 months. It begins with the date the delivery leaves the factory. In the case of replaced or repaired products, the warranty period starts afresh and shall last for 6 months from the date the replacement goods are shipped from the supplier. The guarantee expires prematurely if the purchaser or a third party undertakes inappropriate modifications or repairs or if the purchaser, when a fault has occurred, does not immediately take all appropriate measures to mitigate the damage and does not give the supplier the opportunity to resolve the defect.
13.2 Damage is excluded from the warranty and the supplier's liability which has arisen in circumstances which cannot be proven to be due to poor materials, faulty design or poor workmanship, e.g. natural wear, improper maintenance, failure to follow operating instructions, excessive strain, unsuitable equipment, chemical or electrolytic influences as well as other reasons that the supplier cannot be held responsible for.
13.3 The purchaser shall only be entitled to the replacement or repair of defective goods. The purchaser is not entitled to further claims, especially for compensation for damage or consequential damage. In no case can claims be considered by the purchaser for compensation for damage which is not caused to the object itself, e.g. loss of production, inability to use the goods, loss of contracts, loss of profit and other direct or indirect damage. This disclaimer does not apply to unlawful intent or gross negligence on the part of the supplier. Moreover, this disclaimer does not apply in so far as any mandatory provisions oppose it.
- 14. Place of jurisdiction and applicable law**
14.1 The place of jurisdiction for the purchaser and the supplier is the place where the supplier has its head office. The supplier is entitled to take out legal action against the purchaser at its place of residence.
14.2 The contract shall be exclusively governed by the national commercial law which applies in the supplier's country. The provisions of the CISG do not apply.

Sales and service locations

Fraisa SA

Gurzelenstrasse 7
4512 Bellach
Fon: +41 (0)32 617 42 42
Fax: +41 (0)32 617 42 41
mail.ch@fraisa.com

Fraisa GmbH

Hanns-Martin-Schleyer-Str. 15b
D-47877 Willich
Fon: +49 2154 489 84-0
Fax: +49 2154 489 84-33
info@fraisa.de

Fraisa Sarl.

7, Rue de Lombardie
F-69150 Décines
Fon: +33 4 721 45 700
Fax: +33 4 723 73 490
fraisa@fraisa.fr

Fraisa Italia s.r.l.

Via Grosio 10/8
I-20151 Milano
Fon: +39 02 334 06 086
Fax: +39 02 334 06 055
mail.it@fraisa.com

Fraisa Hungária Kft.

Vásárhelyi Pál u. 3
H-3950 Sárospatak
Fon: +36 47 511 217
Fax: +36 47 511 215
mail.hu@fraisa.com

Fraisa USA Inc.

711 5th St SW
USA-New Brighton MN 55112
Fon: +1 651 636 8488
Fax: +1 651 636 8588
info@fraisausa.com

FRAISA SA China Rep Office

CBC Building, 49A Wuyi Road
CN-200050 Shanghai
Fon: +86 21 5118 0821
Fax: +41 32 617 42 41
infochina@fraisa.com

Och GmbH

Fischbacher Hauptstrasse 156
D-90475 Nürnberg
Fon: +49 911 833 07-0
Fax: +49 911 833 07-10
info@och.de

(●) Associated companies.
To find your contact refer to www.fraisa.com.





Article list – Drilling tools

Example:	Article	B72015
	Article-N°:	B72015
	Coating:	DURO-X
	Page:	21

[illegible]



Article list – Thread cutting tools

Example: Article EH0100

Article-N°.: EH0100

Coating: TiCN

Page: 143

Article-N°.		Coating							
INDEX		<u>E</u>	<u>EV</u>	<u>EH</u>	<u>ET</u>	<u>EI</u>	<u>EF</u>	<u>EL</u>	<u>EU</u>
		without	evaporated	TiCN	TRIBO	INTEGRAL	F-DLC	LONGCUT	UNICUT-4X
Chemical composition				TiCN	TiAlN	TiAlN	DLC	AlCrN	TiAlCN
Hardness [HV]				3000	3000	3500	2800	3200	3200
Max. temp. [°C]				400	300	1000	500	1100	650
_ 0020	185					●			
_ 0021	185					●			
_ 0050	187					●			
_ 0051	187					●			
_ 0100	143			●					
_ 0101	143			●					
_ 0109	203			●					
_ 0110	205			●					
_ 0229	207			●					
_ 0230	209			●					
_ 0400	165				●				
_ 0401	165				●				
_ 0502	147			●					
_ 0503	147			●					
_ 0504	231			●					
_ 0505	231			●					
_ 0512	159			●					
_ 0513	159			●					
_ 0570	149			●					
_ 0570	167				●				
_ 0571	151			●					
_ 0571	167				●				
_ 0572	233			●					
_ 0573	233			●					
_ 0580	153			●					
_ 0580	169				●				
_ 0581	153			●					
_ 0581	169				●				
_ 0590	155			●					
_ 0590	171				●				
_ 0591	157			●					
_ 0591	173				●				
_ 0595	161			●					
_ 0596	161			●					
_ 0598	201	●							
_ 0599	243	●							
_ 0600	175			●					
_ 0601	175			●					
_ 0620	177			●					
_ 0621	177			●					
_ 0705	195				●				

Article-N°.		Coating							
INDEX		<u>E</u>	<u>EV</u>	<u>EH</u>	<u>ET</u>	<u>EI</u>	<u>EF</u>	<u>EL</u>	<u>EU</u>
		without	evaporated	TiCN	TRIBO	INTEGRAL	F-DLC	LONGCUT	UNICUT-4X
_ 0706	197				●				
_ 0755	199				●				
_ 0756	199				●				
_ 1229	269			●					
_ 1240	257				●				
_ 1241	259				●				
_ 1257	247			●					
_ 1258	249			●					
_ 1260	251			●					
_ 1260	261				●				
_ 1261	253			●					
_ 1261	263				●				
_ 1270	265			●					
_ 1271	267			●					
_ 1400	273			●					
_ 1402	293					●			
_ 1429	297			●					
_ 1440	287				●				
_ 1452	295					●			
_ 1472	277			●					
_ 1475	279			●					
_ 1475	289				●				
_ 1480	291			●					
_ 1482	281			●					
_ 1495	283			●					
_ 1602	321					●			
_ 1620	313				●				
_ 1621	315				●				
_ 1652	323					●			
_ 1687	305			●					
_ 1688	307			●					
_ 1690	309			●					
_ 1690	317				●				
_ 1691	311			●					
_ 1691	319				●				
_ 1699	325	●							
_ 1750	331				●				
_ 1751	331				●				
_ 1787	327			●					
_ 1788	327			●					
_ 1790	329			●					
_ 1790	333				●				
_ 1791	329			●					
_ 1791	333				●				
_ 1799	335	●							
_ 1830	339				●				
_ 2010	409								●
_ 2060	411								●
_ 2110	413								●
_ 2200	415								●
_ 2210	415								●
_ 6100	359			●					
_ 6101	359			●					
_ 6300	189			●					
_ 6301	191			●					
_ 6350	193			●					
_ 6351	193			●					
_ 6500	179			●					
_ 6501	181			●					
_ 6550	183			●					
_ 6551	183			●					
_ 6900	163			●					
_ 6901	163			●					
_ 6910	255			●					
_ 6911	255			●					
_ 6916	285			●					

Article-N°.		Coating							
INDEX		<u>E</u>	<u>EV</u>	<u>EH</u>	<u>ET</u>	<u>EI</u>	<u>EF</u>	<u>EL</u>	<u>EU</u>
		without	evaporated	TiCN	TRIBO	INTEGRAL	F-DLC	LONGCUT	UNICUT-4X
_ 10060	355						●		
_ 10061	357						●		
_ 10064	371						●		
_ 10065	371						●		
_ 10068	375						●		
_ 10070	365			●					
_ 10071	367			●					
_ 10072	369			●					
_ 10073	369			●					
_ 10074	373			●					
_ 10075	373			●					
_ 10078	377			●					
_ 10080	361							●	
_ 10081	363							●	
_ 10110	235	●							
_ 10114	239	●							
_ 10115	239	●							
_ 10118	227	●							
_ 10119	227	●							
_ 10122	223	●							
_ 10123	223	●							
_ 10214	237	●							
_ 10218	241	●							
_ 10219	241	●							
_ 10220	229	●							
_ 10221	229	●							
_ 10222	225	●							
_ 10223	225	●							
_ 10310	145			●					
_ 10311	145			●					
_ 10340	219	●							
_ 10350	221	●							
_ 10800	211	●	●						
_ 10801	213	●	●						
_ 10820	215	●	●						
_ 10821	217	●	●						
_ 11260	379						●		
_ 11261	379						●		
_ 11270	381			●					
_ 11271	381			●					
_ 11425	275			●					
_ 11480	299	●	●						
_ 11482	301	●	●						
_ 11820	341	●							
_ 11846	343	●							
_ 11950	385			●					
_ 11951	385			●					
_ 11960	383						●		
_ 11961	383						●		
_ 11970	347	●							
_ 11971	347	●							
_ 11980	349	●							
_ 11981	349	●							
_ 22200	391	●		●					
_ 22300	393	●		●					
_ 24200	395			●					
_ 24220	399			●					
_ 24300	397			●					
_ 24320	401			●					
_ 24340	403			●					
_ 24360	405			●					
_ 24370	407			●					
_ 26020	417			●					
_ 26040	419			●					
_ 28500	421	●							●



This image shows a full page of white paper with horizontal blue ruling lines. The lines are evenly spaced and run across the width of the page. There is no handwriting or other markings on the paper.

This image shows a full page of blank, lined paper. It features approximately 28 horizontal blue or grey lines spaced evenly apart, typical of notebook paper. The lines extend across the entire width of the page, leaving small margins at the top and bottom. There are no vertical lines, text, or other markings on the page.

[illegible]

[illegible]

